




OIL ANALYSIS REPORT

Sample Rating Trend

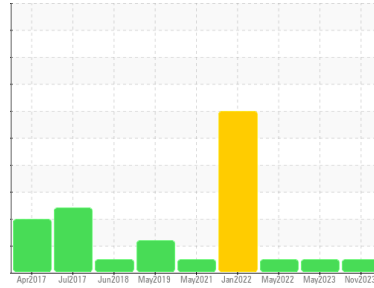

NORMAL



Machine Id
4526

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0097628	GFL0077952	GFL0038990
Sample Date	Client Info	15 Nov 2023	18 May 2023	26 May 2022
Machine Age	hrs	18531	16821	15765
Oil Age	hrs	0	0	0
Oil Changed	Client Info	Changed	N/A	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >2.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	0.0

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	4	5	17
Chromium	ppm ASTM D5185(m) >20	<1	<1	2
Nickel	ppm ASTM D5185(m) >4	3	<1	4
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m) >3	0	0	0
Aluminum	ppm ASTM D5185(m) >20	2	2	11
Lead	ppm ASTM D5185(m) >40	0	1	2
Copper	ppm ASTM D5185(m) >330	<1	<1	26
Tin	ppm ASTM D5185(m) >15	0	<1	1
Antimony	ppm ASTM D5185(m)	0	0	<1
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 2	10	4	2
Barium	ppm ASTM D5185(m) 0	0	0	0
Molybdenum	ppm ASTM D5185(m) 50	61	59	62
Manganese	ppm ASTM D5185(m) 0	0	<1	1
Magnesium	ppm ASTM D5185(m) 950	947	966	1043
Calcium	ppm ASTM D5185(m) 1050	1065	1082	1094
Phosphorus	ppm ASTM D5185(m) 995	1003	1081	1102
Zinc	ppm ASTM D5185(m) 1180	1161	1136	1249
Sulfur	ppm ASTM D5185(m) 2600	2611	2696	2589
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	7	6	12
Sodium	ppm ASTM D5185(m)	2	2	4
Potassium	ppm ASTM D5185(m) >20	0	<1	5

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	0.2	0.2	0.9
Nitration	Abs/cm ASTM D7624* >20	6.1	6.2	10.6
Sulfation	Abs/.1mm ASTM D7415* >30	19.4	19.6	24.7



OIL ANALYSIS REPORT








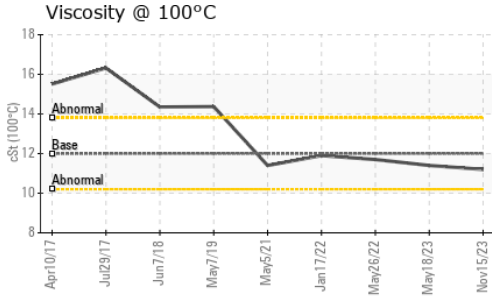


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	14.5	14.5	18.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.2	11.4	11.7

GRAPHS

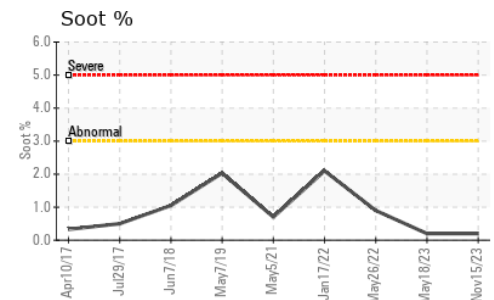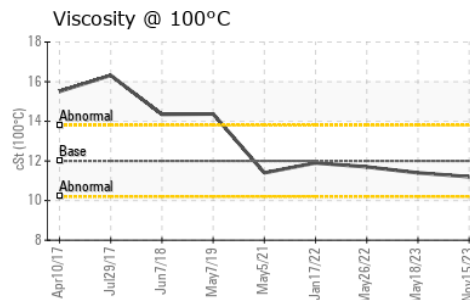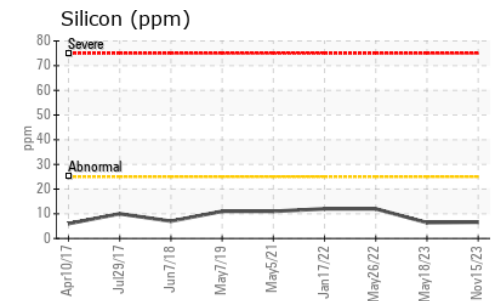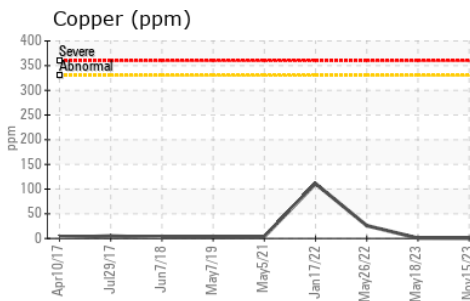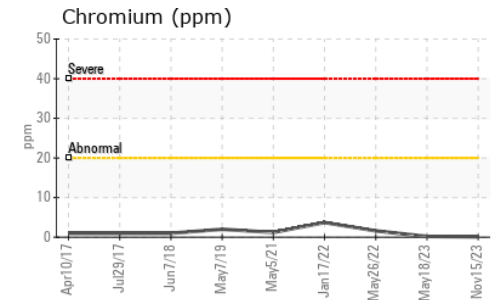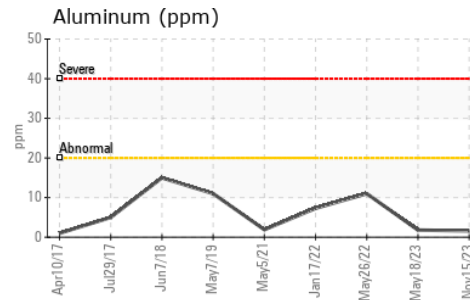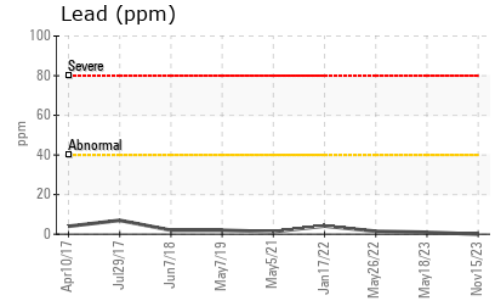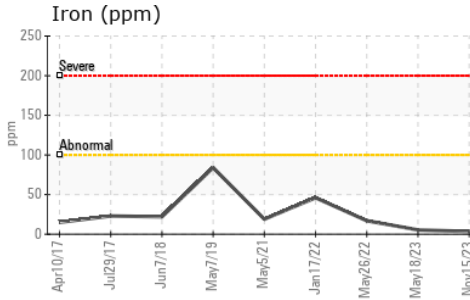

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0097628 **Received** : 21 Nov 2023
Lab Number : 02597847 **Diagnosed** : 21 Nov 2023
Unique Number : 5682927 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F: