




OIL ANALYSIS REPORT

Sample Rating Trend

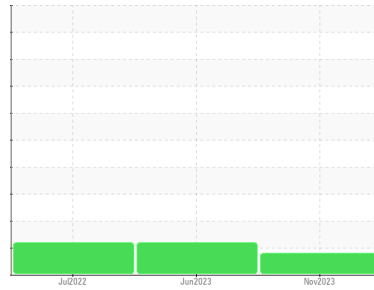

FUEL



Machine Id
811047

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0097618	GFL0078002	GFL0054191
Sample Date	Client Info	10 Nov 2023	12 Jun 2023	28 Jul 2022
Machine Age	hrs	4300	3589	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185(m)	>100	53	24	59
Chromium	ppm	ASTM D5185(m)	>20	2	1	2
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	1	2
Lead	ppm	ASTM D5185(m)	>40	<1	0	1
Copper	ppm	ASTM D5185(m)	>330	1	<1	3
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	<1
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)	2	6	1	3
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	56	56	54
Manganese	ppm	ASTM D5185(m)	0	<1	<1	1
Magnesium	ppm	ASTM D5185(m)	950	857	928	897
Calcium	ppm	ASTM D5185(m)	1050	970	1005	999
Phosphorus	ppm	ASTM D5185(m)	995	903	1009	925
Zinc	ppm	ASTM D5185(m)	1180	1062	1148	1114
Sulfur	ppm	ASTM D5185(m)	2600	2187	2361	2280
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS


method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)	>25	11	10	11
Sodium	ppm	ASTM D5185(m)		5	5	6
Potassium	ppm	ASTM D5185(m)	>20	0	<1	<1
Fuel	%	ASTM D7593*	>5	▲ 6.9	▲ 5.9	▲ 4.3

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	ASTM D7844*	>3	0.6	0.3	0.4
Nitration	Abs/cm	ASTM D7624*	>20	12.3	9.9	10.7
Sulfation	Abs/.1mm	ASTM D7415*	>30	26.5	22.3	24.2



OIL ANALYSIS REPORT









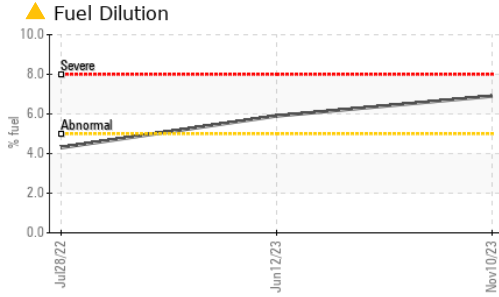


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	28.6	22.1	23.7

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	10.1	▲ 10.1	▲ 10.1

GRAPHS

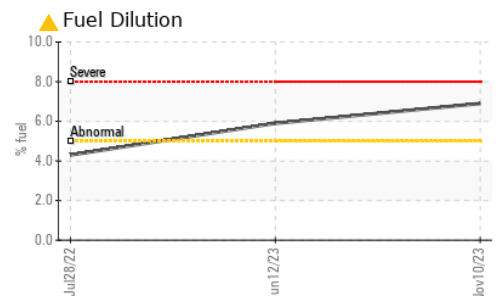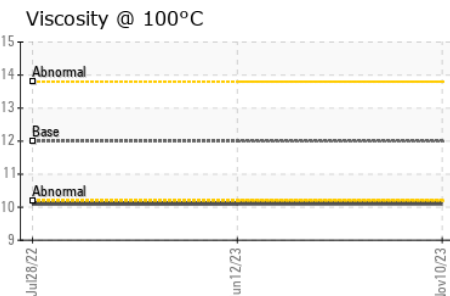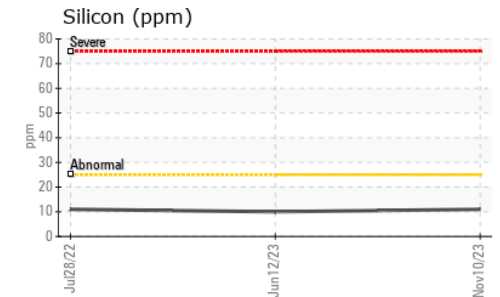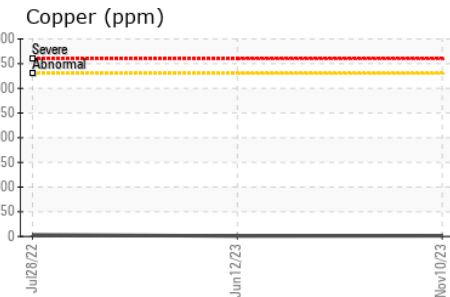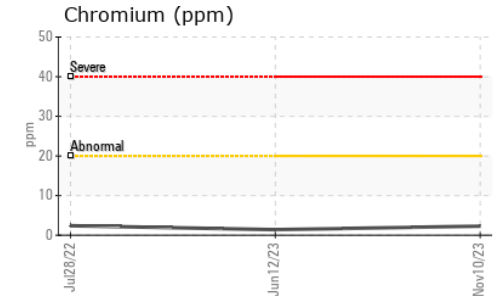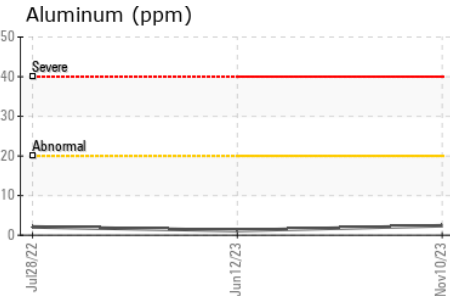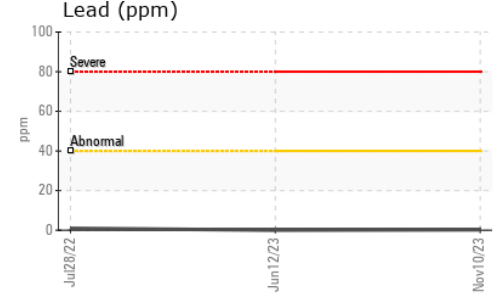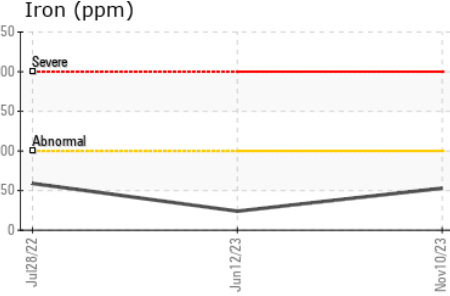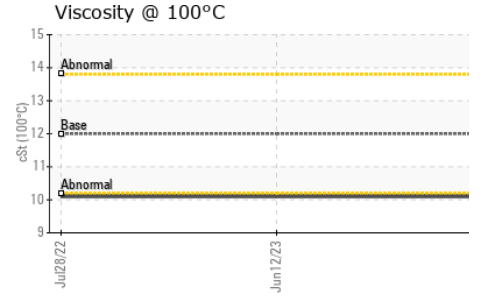

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0097618 **Received** : 21 Nov 2023
Lab Number : 02597848 **Diagnosed** : 22 Nov 2023
Unique Number : 5682928 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: PercentFuel)
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F: