


OIL ANALYSIS REPORT



Area
Haul Truck
Machine Id
HT4501

Component
Transmission (Manual)
Fluid
PETRO CANADA DURATRAN (60 LTR)

Sample Rating Trend

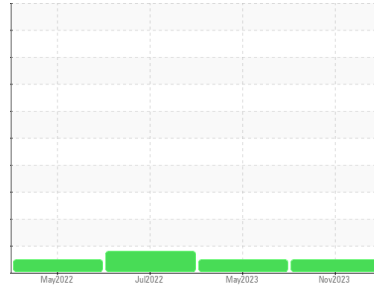

NORMAL

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the fluid.

Fluid Condition
The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0067047	PC0051417	PC0048830
Sample Date	Client Info		07 Nov 2023	13 May 2023	21 Jul 2022
Machine Age	hrs	Client Info	8391	6383	4116
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >200	5	10	6
Chromium	ppm	ASTM D5185(m) >5	0	0	0
Nickel	ppm	ASTM D5185(m) >5	<1	0	0
Titanium	ppm	ASTM D5185(m)	0	0	<1
Silver	ppm	ASTM D5185(m) >7	<1	0	2
Aluminum	ppm	ASTM D5185(m) >25	1	1	1
Lead	ppm	ASTM D5185(m) >45	<1	1	13
Copper	ppm	ASTM D5185(m) >225	2	9	▲ 365
Tin	ppm	ASTM D5185(m) >10	0	0	<1
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0


ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 110	88	5	36
Barium	ppm	ASTM D5185(m) 0.0	<1	0	0
Molybdenum	ppm	ASTM D5185(m) 0.0	6	3	<1
Manganese	ppm	ASTM D5185(m) 1	0	<1	<1
Magnesium	ppm	ASTM D5185(m) 13	111	51	15
Calcium	ppm	ASTM D5185(m) 3610	3277	2285	2956
Phosphorus	ppm	ASTM D5185(m) 1192	1118	936	1026
Zinc	ppm	ASTM D5185(m) 1455	1375	1070	976
Sulfur	ppm	ASTM D5185(m) 2641	2632	2580	2576
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >125	9	6	6
Sodium	ppm	ASTM D5185(m)	<1	3	3
Potassium	ppm	ASTM D5185(m) >20	0	1	<1

OIL ANALYSIS REPORT

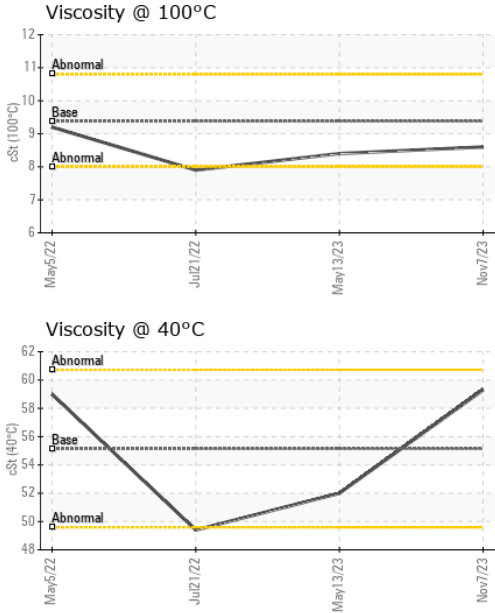


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	55.14	52.0	49.4
Visc @ 100°C	cSt	ASTM D7279(m)	9.38	8.4	7.9
Viscosity Index (VI)	Scale	ASTM D2270*	153	135	128

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

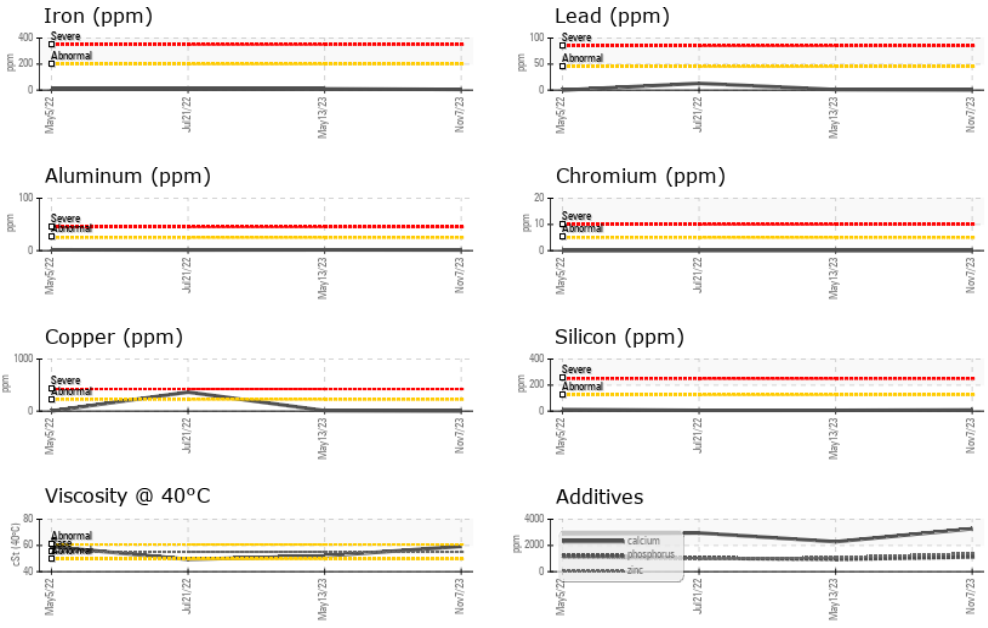

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0067047 **Received** : 21 Nov 2023
Lab Number : 02597930 **Diagnosed** : 21 Nov 2023
Unique Number : 5683010 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: KV100, VI)

Lakeshore Gold Timmins West
 Timmins, ON
 CA
 Contact: Adam Koscielak
 adam.koscielak@HFSinclair.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.