




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
OR681
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

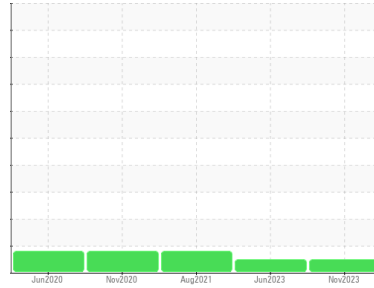

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0092226 | GFL0056458 | GFL0030457 |
| Sample Date | Client Info | | 16 Nov 2023 | 01 Jun 2023 | 10 Aug 2021 |
| Machine Age | hrs | Client Info | 10033 | 9144 | 6171 |
| Oil Age | hrs | Client Info | 1000 | 621 | 1000 |
| Oil Changed | Client Info | | Changed | Changed | Changed |
| Sample Status | | | NORMAL | NORMAL | ABNORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >2.1 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.21 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|------|
| Iron | ppm | ASTM D5185(m) | >51 | 41 | 39 | ▲ 86 |
| Chromium | ppm | ASTM D5185(m) | >11 | <1 | <1 | 5 |
| Nickel | ppm | ASTM D5185(m) | >5 | <1 | 1 | 2 |
| Titanium | ppm | ASTM D5185(m) | | 0 | <1 | 0 |
| Silver | ppm | ASTM D5185(m) | >3 | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >31 | 4 | 4 | 6 |
| Lead | ppm | ASTM D5185(m) | >26 | 2 | 2 | 6 |
| Copper | ppm | ASTM D5185(m) | >26 | 1 | <1 | 2 |
| Tin | ppm | ASTM D5185(m) | >4 | 0 | 0 | <1 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | <1 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | 0 | 7 | 3 | 1 |
| Barium | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 60 | 63 | 65 | 68 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | <1 | 1 |
| Magnesium | ppm | ASTM D5185(m) | 1010 | 986 | 1006 | 1080 |
| Calcium | ppm | ASTM D5185(m) | 1070 | 1248 | 1235 | 1158 |
| Phosphorus | ppm | ASTM D5185(m) | 1150 | 1070 | 1147 | 1097 |
| Zinc | ppm | ASTM D5185(m) | 1270 | 1269 | 1274 | 1294 |
| Sulfur | ppm | ASTM D5185(m) | 2060 | 2563 | 2680 | 2353 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

CONTAMINANTS


| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|----------|----------|---|
| Silicon | ppm | ASTM D5185(m) | >22 | 5 | 4 | 6 |
| Sodium | ppm | ASTM D5185(m) | >31 | 2 | 2 | 3 |
| Potassium | ppm | ASTM D5185(m) | >20 | 0 | 0 | 2 |

INFRA-RED

| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot % | % | ASTM D7844* | >3 | 1.2 | 1.3 | 1.7 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 8.9 | 9.3 | 10.0 |
| Sulfation | Abs./1mm | ASTM D7415* | >30 | 23.3 | 22.8 | 24.0 |



OIL ANALYSIS REPORT

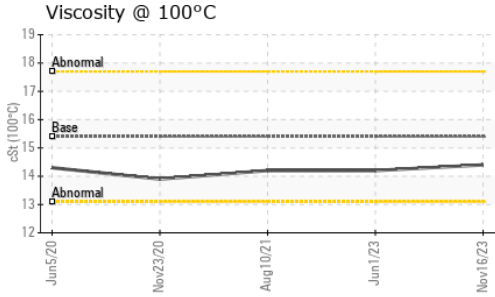

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|-----------|----------------------|---------|----------|----------|
| Oxidation | Abs./1mm ASTM D7414* | 16.6 | 16.5 | 17.4 |









VISUAL

| method | limit/base | current | history1 | history2 |
|------------------|----------------|---------|----------|----------|
| Emulsified Water | scalar Visual* | NEG | NEG | NEG |
| Free Water | scalar Visual* | NEG | NEG | NEG |

FLUID PROPERTIES

| method | limit/base | current | history1 | history2 |
|--------------|-------------------|---------|----------|----------|
| Visc @ 100°C | cSt ASTM D7279(m) | 14.4 | 14.2 | 14.2 |

GRAPHS

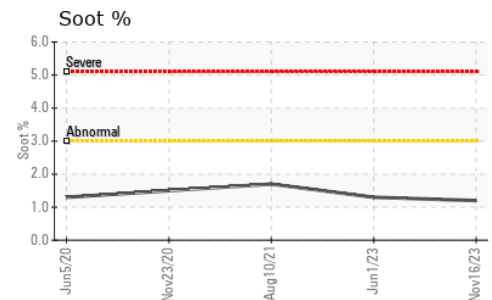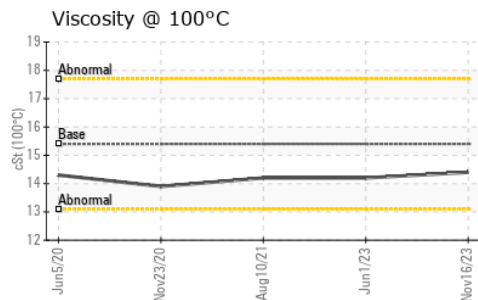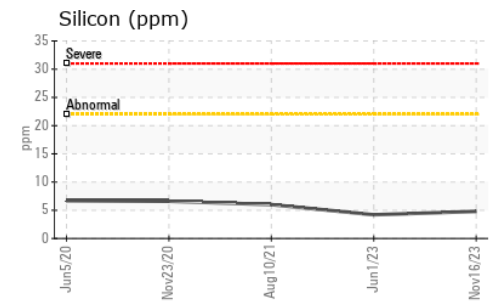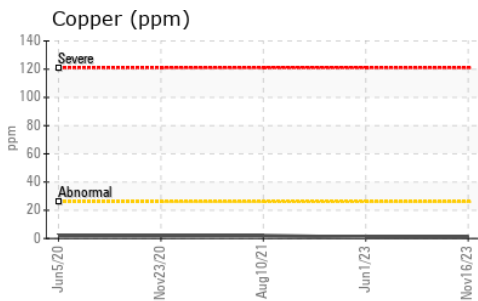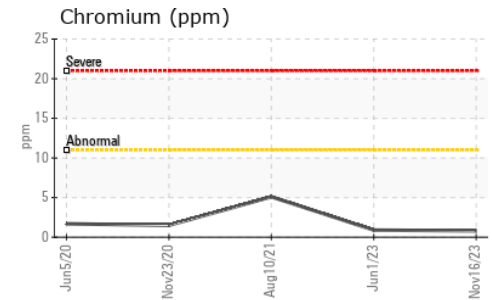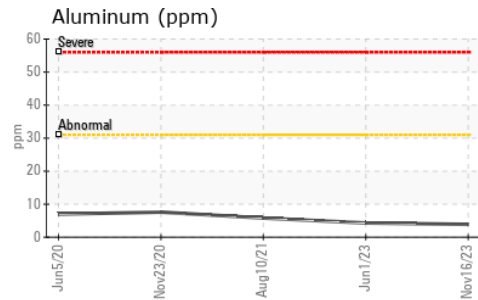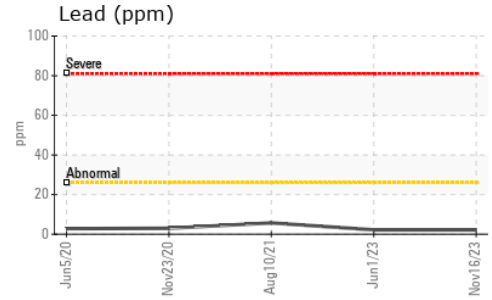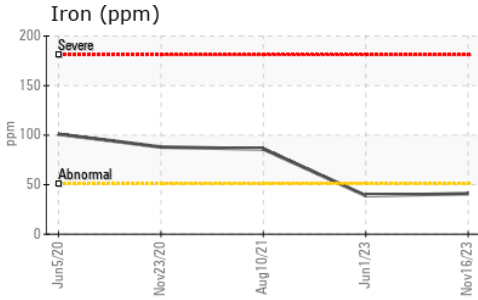

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 720 - Lafleche - Landfill
Sample No. : GFL0092226 **Received** : 23 Nov 2023
Lab Number : 02598286 **Diagnosed** : 23 Nov 2023
Unique Number : 5683366 **Diagnostician** : Kevin Marson
Test Package : MOB 1

17125 Lafleche Road,
 Moose Creek, ON
 CA K0C 1W0
 Contact: Charles Bergeron
 cbergeron@gflenv.com
 T: (613)538-4853
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.