




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

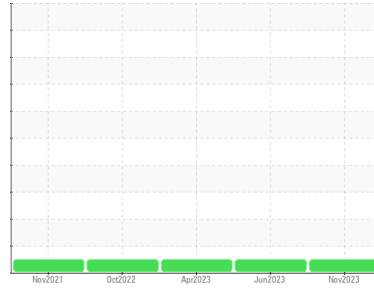

Machine Id

**1178**

Component

**Diesel Engine**

Fluid

**PETRO CANADA 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0090748</b>	GFL0069692	GFL0069682
Sample Date	Client Info		<b>10 Nov 2023</b>	09 Jun 2023	12 Apr 2023
Machine Age	hrs	Client Info	<b>16395</b>	15566	15300
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	<b>18</b>	7	18
Chromium	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>3</b>	1	2
Lead	ppm	ASTM D5185(m)	>40	<b>2</b>	<1	1
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>1</b>	1	2
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>63</b>	59	64
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>1020</b>	997	1059
Calcium	ppm	ASTM D5185(m)		<b>1099</b>	1050	1178
Phosphorus	ppm	ASTM D5185(m)		<b>1045</b>	1074	1152
Zinc	ppm	ASTM D5185(m)		<b>1251</b>	1197	1295
Sulfur	ppm	ASTM D5185(m)		<b>2494</b>	2615	2721
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>5</b>	3	3
Sodium	ppm	ASTM D5185(m)		<b>2</b>	2	2
Potassium	ppm	ASTM D5185(m)	>20	<b>4</b>	<1	0

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	0.1	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.7</b>	7.1	9.6
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>21.3</b>	19.7	23.0



# OIL ANALYSIS REPORT

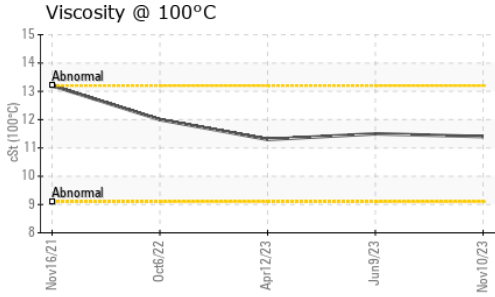

### FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs./1mm ASTM D7414*	>25	17.8	14.9	17.4









### VISUAL

method	limit/base	current	history1	history2	
Emulsified Water	scalar Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar Visual*		NEG	NEG	NEG

### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D7279(m)	11.4	11.5	11.3

### GRAPHS

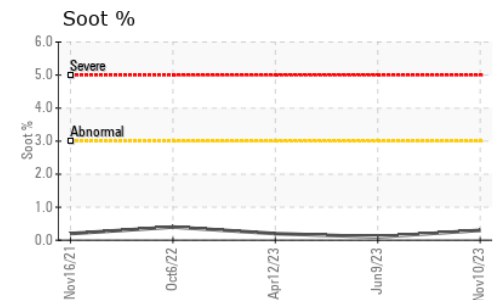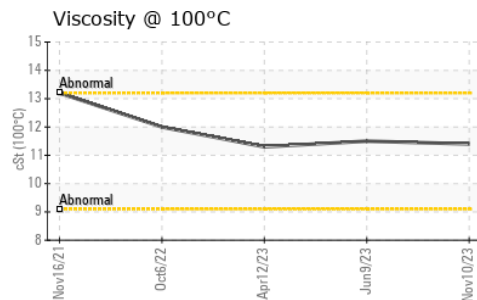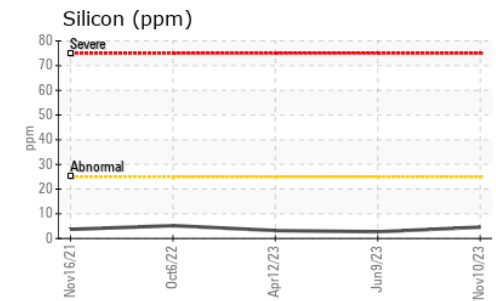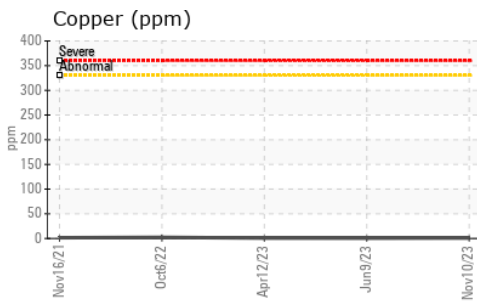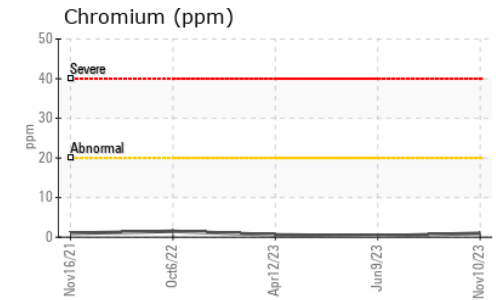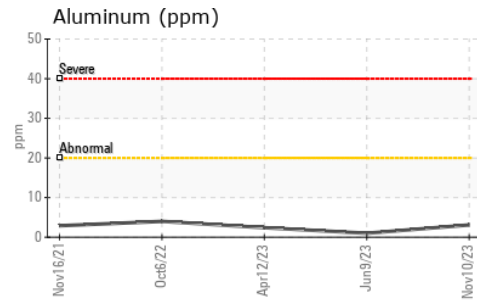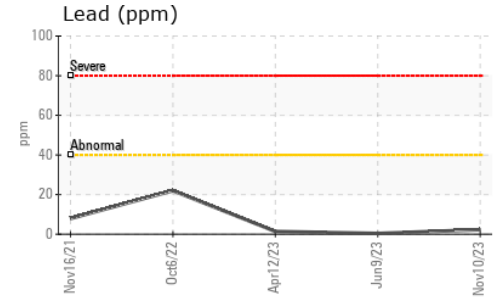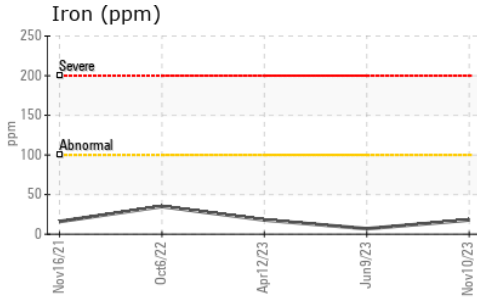

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 504 - Edmonton**  
**Sample No.** : GFL0090748 **Received** : 23 Nov 2023 12015 28 Street NE  
**Lab Number** : 02598325 **Diagnosed** : 23 Nov 2023 Edmonton, AB  
**Unique Number** : 5683405 **Diagnostician** : Wes Davis CA T6S 1E2  
**Test Package** : MOB 1 Contact: Jerrod Adair  
jerrodadair@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.