


PROBLEM SUMMARY

Sample Rating Trend


ISO

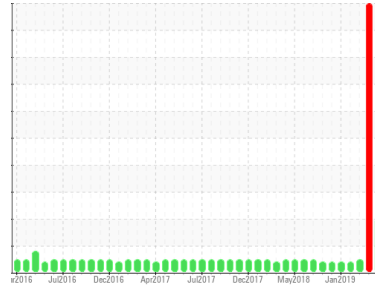

Area
Turret [450207944]
Machine Id
Circulation Tank Heat Transfer Fluid (WH-167891) (S/N Sample Tag: TB-16603 WH-167891)
Component
Heat Transfer Fluid
Fluid
PETRO CANADA TURBOFLO EP 46 (800 LTR)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

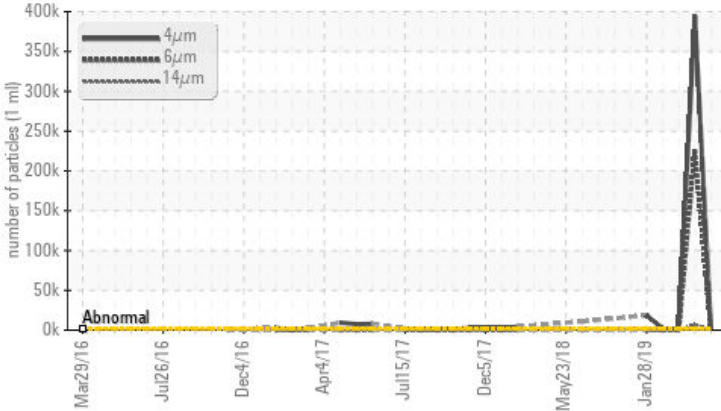

RECOMMENDATION

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	SEVERE	NORMAL
Particles >4µm	ASTM D7647	>1300	▲ 1391	● 394642	927
Particles >6µm	ASTM D7647	>320	▲ 582	● 226201	76
Particles >14µm	ASTM D7647	>40	▲ 91	● 6757	4
Particles >21µm	ASTM D7647	>10	▲ 24	● 621	1
Oil Cleanliness	ISO 4406 (c)	>17/15/12	▲ 18/16/14	● 26/25/20	17/13/9

Customer Id: TERHAM
Sample No.: PC0076371
Lab Number: 02598434
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

HISTORICAL DIAGNOSIS


18 Dec 2019 Diag: Kevin Marson

WATER



Check seals and/or filters for points of contaminant entry. We advise that you check all areas where contaminants can enter the system. We advise that you follow the water drain-off procedure for this component, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. All component wear rates are normal. Water contamination levels are severely high. Water contamination levels are severely high. ppm Water contamination levels are severely high. Particles >14µm are severely high. Particles >21µm are severely high. Particles >6µm are severely high. Particles >4µm are severely high. There is a high concentration of water present in the fluid. The high sodium (Na) level indicates the possible presence of salt water. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code. The AN level is acceptable for this fluid.

view report



05 Jul 2019 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. Lubritest recommends using HTTFL sample kits for heat transfer fluids. Please contact us at 1-800-268-2131 and provide a purchase order for \$245 + HST in order to conduct additional testing (boiling points @ 10%, 50%, and 90%, percent boiling < 335°C, and solids) to determine the suitability for continued use. Please contact your representative for information regarding the proper sampling kits for your service. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

view report



11 Apr 2019 Diag: Kevin Marson

ISO




We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample. Lubritest recommends using HTTFL sample kits for heat transfer fluids. Please contact us at 1-800-268-2131 and provide a purchase order for \$245 + HST in order to conduct additional testing (boiling points @ 10%, 50%, and 90%, percent boiling < 335°C, and solids) to determine the suitability for continued use. Please contact your representative for information regarding the proper sampling kits for your service. All component wear rates are normal. Particles >4µm are notably high. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code. The AN level is acceptable for this fluid. The fluid is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



Area
Turret [450207944]
Machine Id
Circulation Tank Heat Transfer Fluid (WH-167891) (S/N Sample Tag: TB-16603 WH-167891)
Component
Heat Transfer Fluid
Fluid
PETRO CANADA TURBOFLO EP 46 (800 LTR)

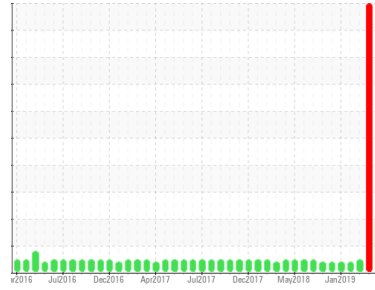

DIAGNOSIS

Recommendation
We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

Wear
All component wear rates are normal.

Contamination
There is a moderate amount of particulates (2 to 100 microns in size) present in the fluid. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

Fluid Condition
The AN level is acceptable for this fluid. The fluid is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0076371	PC	PC0011802
Sample Date	Client Info		09 Oct 2023	18 Dec 2019	05 Jul 2019
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	SEVERE	NORMAL

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.0601	NEG	NEG	NEG





WEAR METALS	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>200	0	<1	0
Chromium	ppm	ASTM D5185(m)	>21	0	0	0
Nickel	ppm	ASTM D5185(m)	>21	0	0	0
Titanium	ppm	ASTM D5185(m)	>21	0	0	0
Silver	ppm	ASTM D5185(m)	>21	<1	0	0
Aluminum	ppm	ASTM D5185(m)	>21	0	0	0
Lead	ppm	ASTM D5185(m)	>21	0	0	<1
Copper	ppm	ASTM D5185(m)	>21	<1	2	<1
Tin	ppm	ASTM D5185(m)	>21	0	0	0
Antimony	ppm	ASTM D5185(m)	>21	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<1	1	0
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		0	2	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		0	2	<1
Calcium	ppm	ASTM D5185(m)		<1	2	<1
Phosphorus	ppm	ASTM D5185(m)	280	275	173	241
Zinc	ppm	ASTM D5185(m)	0.0	2	5	1
Sulfur	ppm	ASTM D5185(m)		699	348	600
Lithium	ppm	ASTM D5185(m)		<1	1	0

CONTAMINANTS	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	0	<1	<1
Sodium	ppm	ASTM D5185(m)	>21	1	▲ 15	0
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	1

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	▲ 1391	● 394642	927
Particles >6µm	ASTM D7647	>320	▲ 582	● 226201	76
Particles >14µm	ASTM D7647	>40	▲ 91	● 6757	4
Particles >21µm	ASTM D7647	>10	▲ 24	● 621	1
Particles >38µm	ASTM D7647	>3	2	3	0
Particles >71µm	ASTM D7647	>3	1	0	0
Oil Cleanliness	ISO 4406 (c)	>17/15/12	▲ 18/16/14	● 26/25/20	17/13/9

OIL ANALYSIS REPORT

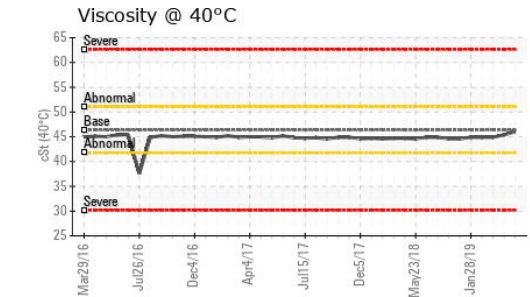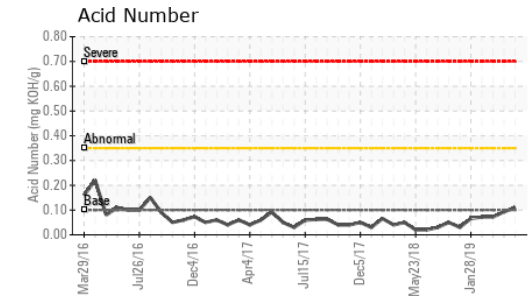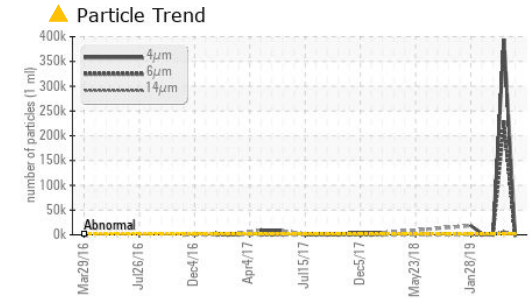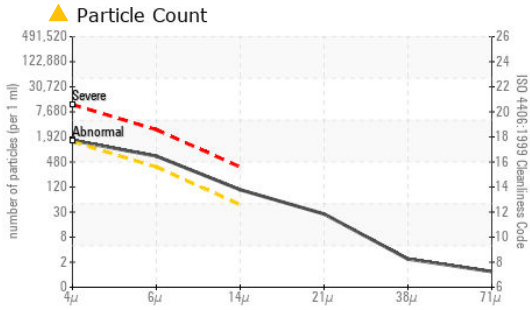

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0076371 **Received** : 23 Nov 2023
Lab Number : 02598434 **Diagnosed** : 24 Nov 2023
Unique Number : 5683514 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: PrtCount, TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.


Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Street
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshhynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	.10	0.11	0.093	0.072

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	LIGHT	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	▲ HAZY	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.0601	NEG	◆ .2%	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7729(m)	46.37	46.0	45.4	44.9

SAMPLE IMAGES

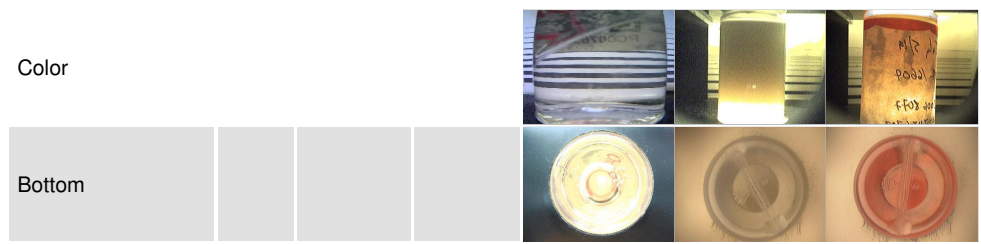

GRAPHS

