


PROBLEM SUMMARY

Sample Rating Trend




ISO

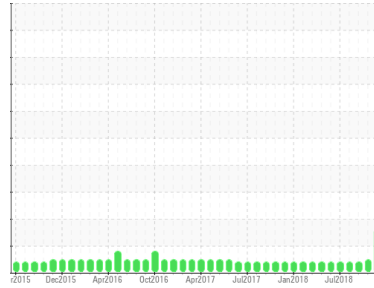

Area
Turret [450207944]
 Machine Id
Reservoir Tank Heat Transfer Fluid (WH-167839) (S/N Sample Tag: TB-16602 WH-167839)
 Component
Heat Transfer Fluid
 Fluid
PETRO CANADA TURBOFLO EP 46 (800 LTR)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

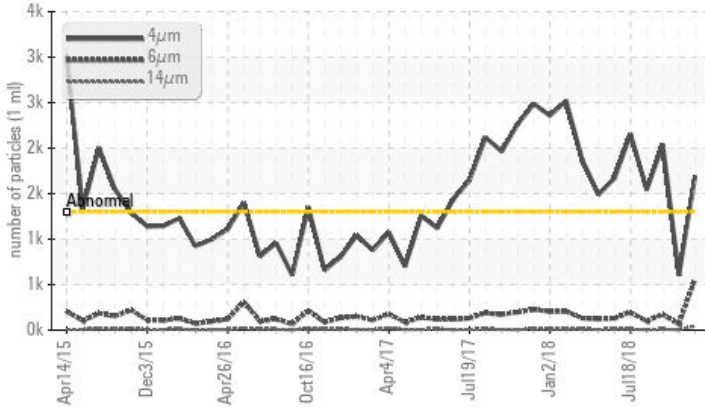

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	NORMAL	ATTENTION
Particles >4µm	ASTM D7647	>1300	▲ 1690	604	▲ 2039
Particles >6µm	ASTM D7647	>320	▲ 562	65	172
Particles >14µm	ASTM D7647	>40	▲ 44	5	10
Oil Cleanliness	ISO 4406 (c)	>17/15/12	▲ 18/16/13	16/13/10	▲ 18/15/10

Customer Id: TERHAM
 Sample No.: PC0076372
 Lab Number: 02598435
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS

05 Jul 2019 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. Lubritest recommends using HTTFL sample kits for heat transfer fluids. Please contact us at 1-800-268-2131 and provide a purchase order for \$245 + HST in order to conduct additional testing (boiling points @ 10%, 50%, and 90%, percent boiling < 335°C, and solids) to determine the suitability for continued use. Please contact your representative for information regarding the proper sampling kits for your service. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

view report



18 Oct 2018 Diag: Kevin Marson

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a light amount of silt (particulates < 14 microns in size) present in the fluid. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

view report



11 Sep 2018 Diag: Kevin Marson

ISO




We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a light amount of silt (particulates < 14 microns in size) present in the fluid. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

view report



Area
Turret [450207944]
Machine Id
Reservoir Tank Heat Transfer Fluid (WH-167839) (S/N Sample Tag: TB-16602 WH-167839)
Component
Heat Transfer Fluid
Fluid
PETRO CANADA TURBOFLO EP 46 (800 LTR)

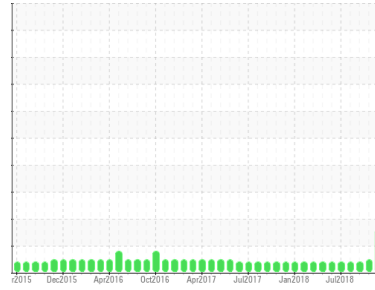

DIAGNOSIS

Recommendation
We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is a light amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0076372	PC0011806	PC
Sample Date	Client Info			09 Oct 2023	05 Jul 2019	18 Oct 2018
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				ATTENTION	NORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.0601	NEG	NEG	NEG





WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>200	0	0	0
Chromium	ppm	ASTM D5185(m)	>21	0	0	0
Nickel	ppm	ASTM D5185(m)	>21	0	0	0
Titanium	ppm	ASTM D5185(m)	>21	0	0	0
Silver	ppm	ASTM D5185(m)	>21	<1	0	0
Aluminum	ppm	ASTM D5185(m)	>21	0	0	0
Lead	ppm	ASTM D5185(m)	>21	0	<1	0
Copper	ppm	ASTM D5185(m)	>21	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>21	0	0	0
Antimony	ppm	ASTM D5185(m)	>21	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1	0	0
Barium	ppm	ASTM D5185(m)		<1	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	<1	0
Magnesium	ppm	ASTM D5185(m)		0	<1	<1
Calcium	ppm	ASTM D5185(m)		<1	<1	<1
Phosphorus	ppm	ASTM D5185(m)	280	275	243	239
Zinc	ppm	ASTM D5185(m)	0.0	1	2	2
Sulfur	ppm	ASTM D5185(m)		694	603	588
Lithium	ppm	ASTM D5185(m)		<1	0	0

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	0	<1	<1
Sodium	ppm	ASTM D5185(m)	>21	1	<1	0
Potassium	ppm	ASTM D5185(m)	>20	0	<1	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	▲ 1690	604	▲ 2039	
Particles >6µm	ASTM D7647	>320	▲ 562	65	172	
Particles >14µm	ASTM D7647	>40	▲ 44	5	10	
Particles >21µm	ASTM D7647	>10	14	2	4	
Particles >38µm	ASTM D7647	>3	1	0	0	
Particles >71µm	ASTM D7647	>3	0	0	0	
Oil Cleanliness	ISO 4406 (c)	>17/15/12	▲ 18/16/13	16/13/10	▲ 18/15/10	

OIL ANALYSIS REPORT

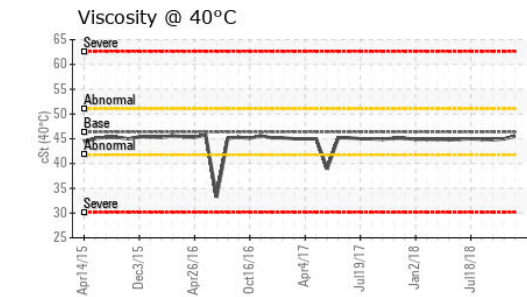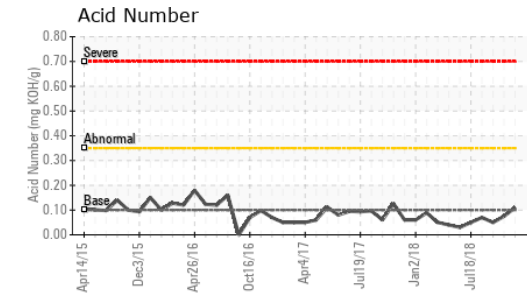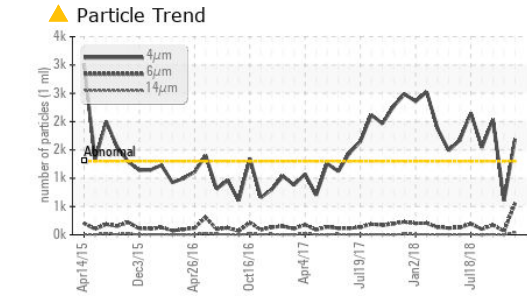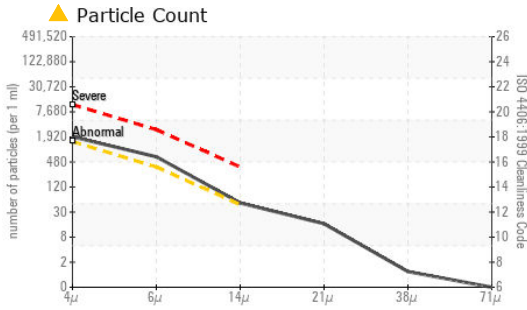

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0076372 **Received** : 23 Nov 2023
Lab Number : 02598435 **Diagnosed** : 24 Nov 2023
Unique Number : 5683515 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: PrtCount, TAN Man)


To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	.10	0.11	0.075	0.05


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.0601	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.37	45.5	45.0	44.8

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

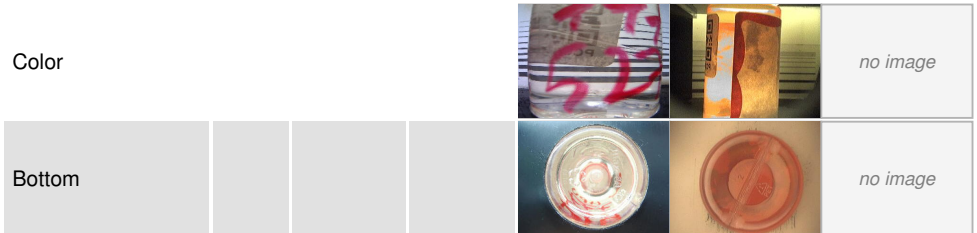

GRAPHS

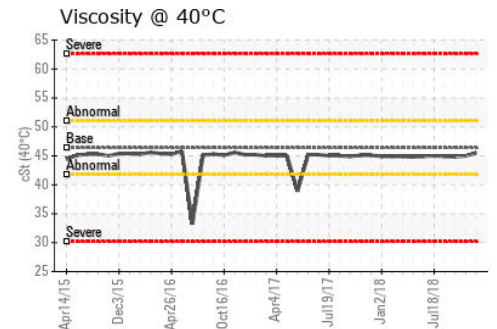

Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Street
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshhynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835