


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

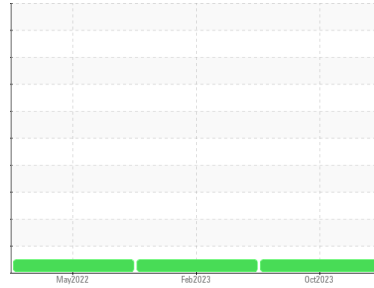

Machine Id
0858

Component
Rear Left Transmission (Auto)

Fluid
PETRO CANADA DURADRIVE HD SYNTHETIC ATF (24 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0076769	PC0052597	PC0018575
Sample Date	Client Info		11 Oct 2023	03 Feb 2023	28 May 2022
Machine Age	kms	Client Info	975926	922121	841820
Oil Age	kms	Client Info	53805	41170	54579
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
PQ	ASTM D8184*	>105	0	0	---	
Iron	ppm	ASTM D5185(m)	>230	56	48	41
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	0	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>5	<1	0	0
Aluminum	ppm	ASTM D5185(m)	>65	18	14	10
Lead	ppm	ASTM D5185(m)	>55	2	<1	<1
Copper	ppm	ASTM D5185(m)	>85	8	10	8
Tin	ppm	ASTM D5185(m)	>5	3	3	2
Antimony	ppm	ASTM D5185(m)		0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		59	67	76
Barium	ppm	ASTM D5185(m)		<1	0	0
Molybdenum	ppm	ASTM D5185(m)		0	<1	<1
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)		<1	<1	1
Calcium	ppm	ASTM D5185(m)		105	93	63
Phosphorus	ppm	ASTM D5185(m)		209	230	198
Zinc	ppm	ASTM D5185(m)		6	6	8
Sulfur	ppm	ASTM D5185(m)		1628	1963	2258
Lithium	ppm	ASTM D5185(m)		<1	<1	<1





CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	9	6	4
Sodium	ppm	ASTM D5185(m)		5	4	4
Potassium	ppm	ASTM D5185(m)	>20	<1	1	2

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*		1.16	1.05	---


OIL ANALYSIS REPORT

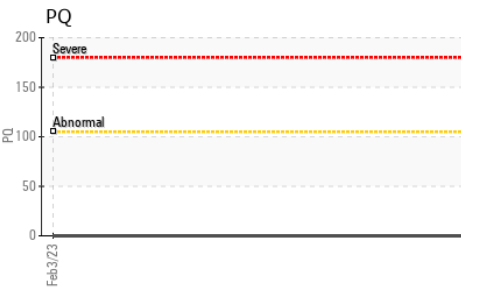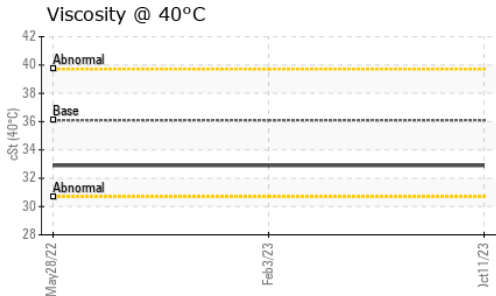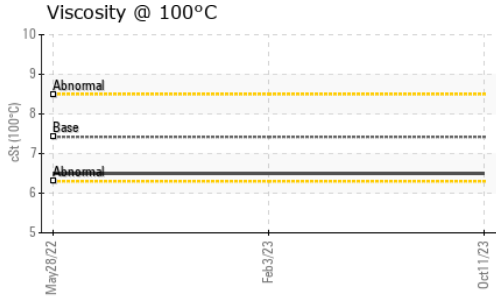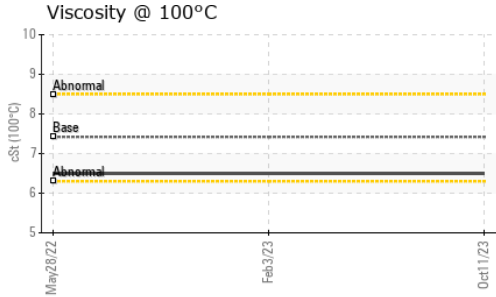






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	36.1	32.9	32.9
Visc @ 100°C	cSt	ASTM D7279(m)	7.42	6.5	6.5
Viscosity Index (VI)	Scale	ASTM D2270*	178	155	155

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

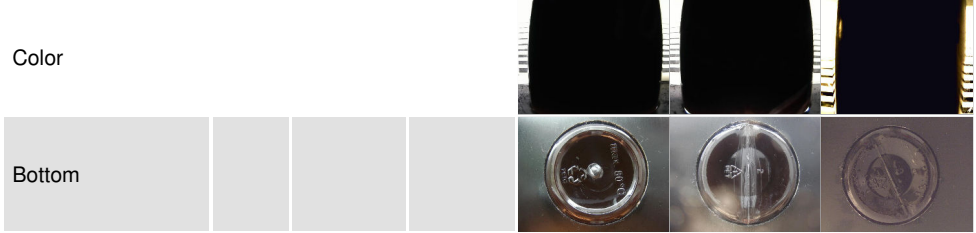

GRAPHS

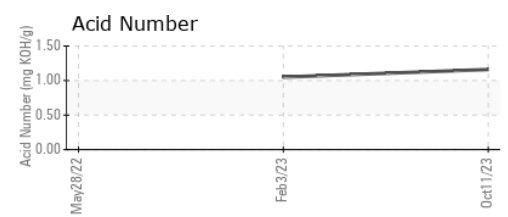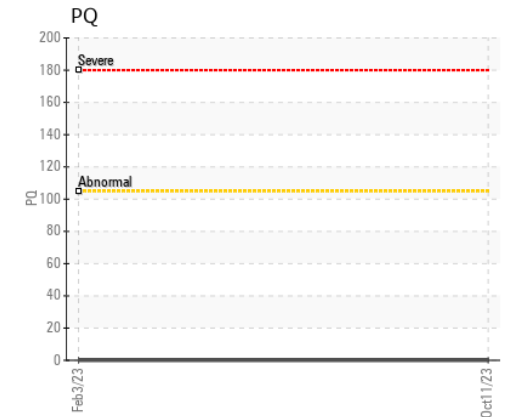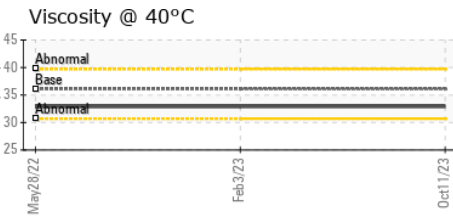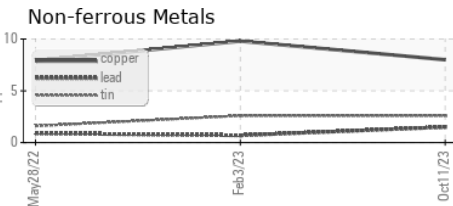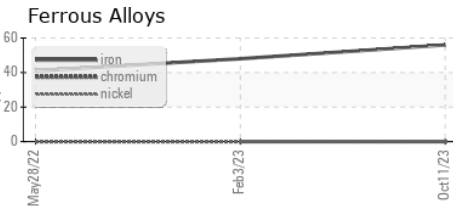

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0076769 **Received** : 23 Nov 2023
Lab Number : 02598480 **Diagnosed** : 24 Nov 2023
Unique Number : 5683560 **Diagnostician** : Wes Davis
Test Package : IND 2 (Additional Tests: KV100, VI)

Metrobus Transit
 25 Messenger Drive
 St. John's, NL
 CA A1B 0H6
 Contact: Dan Finlay
 dan.finlay@metrobus.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.