




OIL ANALYSIS REPORT

Sample Rating Trend

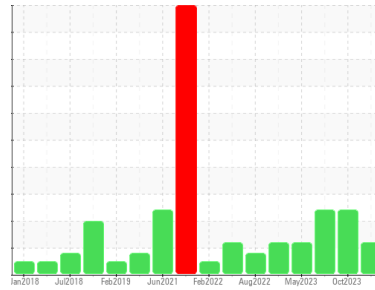

FUEL



Machine Id
7825

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0101707	GFL0093873	GFL0085955
Sample Date	Client Info	20 Nov 2023	22 Oct 2023	14 Jun 2023
Machine Age	hrs	21371	0	20629
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	Changed
Sample Status		ABNORMAL	SEVERE	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >110	12	22	16
Chromium	ppm	ASTM D5185(m) >4	<1	1	1
Nickel	ppm	ASTM D5185(m) >2	0	0	<1
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m) >2	<1	<1	0
Aluminum	ppm	ASTM D5185(m) >25	1	1	<1
Lead	ppm	ASTM D5185(m) >45	<1	<1	<1
Copper	ppm	ASTM D5185(m) >85	1	1	1
Tin	ppm	ASTM D5185(m) >4	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 2	4	8	1
Barium	ppm	ASTM D5185(m) 0	0	<1	0
Molybdenum	ppm	ASTM D5185(m) 50	54	53	51
Manganese	ppm	ASTM D5185(m) 0	0	0	<1
Magnesium	ppm	ASTM D5185(m) 950	862	777	838
Calcium	ppm	ASTM D5185(m) 1050	941	900	910
Phosphorus	ppm	ASTM D5185(m) 995	899	847	939
Zinc	ppm	ASTM D5185(m) 1180	1064	983	1036
Sulfur	ppm	ASTM D5185(m) 2600	2316	2149	2258
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS



method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >30	12	6	3
Sodium	ppm	ASTM D5185(m)	18	5	4
Potassium	ppm	ASTM D5185(m) >20	<1	0	<1
Fuel	%	ASTM D7593* >5	▲ 6.1	◆ 11.3	◆ 10.7

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844* >3	0.4	0.6	0.5
Nitration	Abs/cm	ASTM D7624* >20	7.8	10.4	8.9
Sulfation	Abs/1mm	ASTM D7415* >30	20.3	24.0	22.2



OIL ANALYSIS REPORT







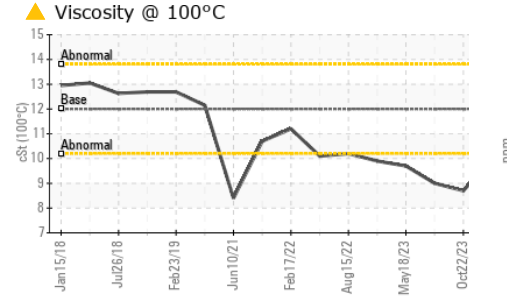
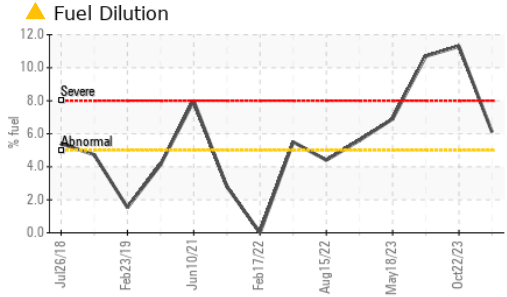


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	15.7	25.3	22.1

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	▲ 10.0	▲ 8.7	▲ 9

GRAPHS

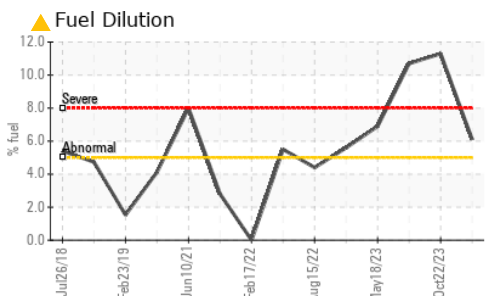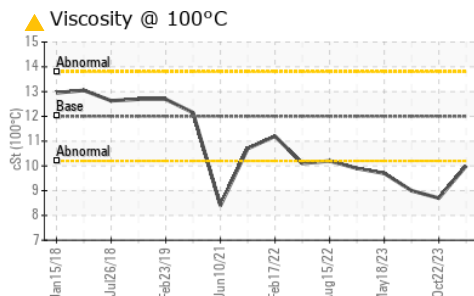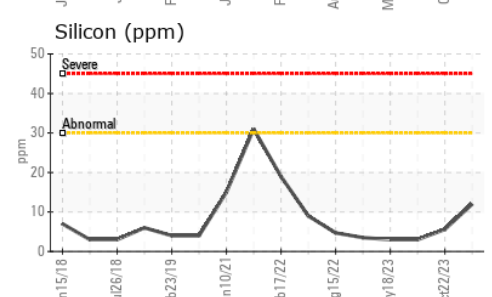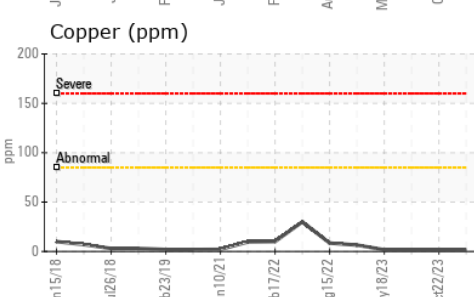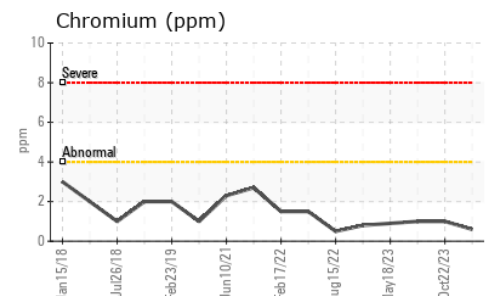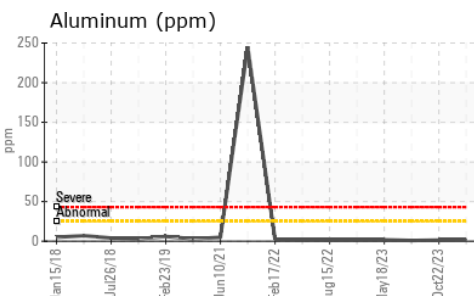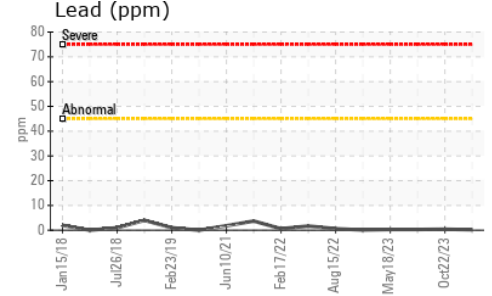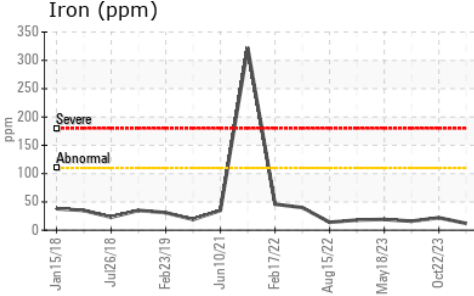

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 554 - Edmonton SW**
Sample No. : GFL0101707 **Received** : 24 Nov 2023
Lab Number : 02598762 **Diagnosed** : 27 Nov 2023
Unique Number : 5683842 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel)
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F: