OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id
OR419
Component
Hydraulic System
Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Nous recommandons le remplacement des filtres de ce composant. Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque, le type et la viscosité de l'huile lors de votre prochain échantillon.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il y a une légère quantité de limon (particules de 4 à 14 microns) dans l'huile.

Fluid Condition

L'état de l'huile est acceptable pour la durée de service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**GFL0097074**	---	---
Sample Date		Client Info		**22 Nov 2023**	---	---
Machine Age	hrs	Client Info		**20251**	---	---
Oil Age	hrs	Client Info		**0**	---	---
Oil Changed		Client Info		**Not Changd**	---	---
Sample Status				**ATTENTION**	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.1	**NEG**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	**7**	---	---
Chromium	ppm	ASTM D5185(m)	>10	**4**	---	---
Nickel	ppm	ASTM D5185(m)	>10	**0**	---	---
Titanium	ppm	ASTM D5185(m)		**0**	---	---
Silver	ppm	ASTM D5185(m)		**<1**	---	---
Aluminum	ppm	ASTM D5185(m)	>10	**2**	---	---
Lead	ppm	ASTM D5185(m)	>10	**0**	---	---
Copper	ppm	ASTM D5185(m)	>75	**2**	---	---
Tin	ppm	ASTM D5185(m)	>10	**0**	---	---
Antimony	ppm	ASTM D5185(m)		**0**	---	---
Vanadium	ppm	ASTM D5185(m)		**0**	---	---
Beryllium	ppm	ASTM D5185(m)		**0**	---	---
Cadmium	ppm	ASTM D5185(m)		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		**2**	---	---
Barium	ppm	ASTM D5185(m)		**<1**	---	---
Molybdenum	ppm	ASTM D5185(m)		**<1**	---	---
Manganese	ppm	ASTM D5185(m)		**0**	---	---
Magnesium	ppm	ASTM D5185(m)		**21**	---	---
Calcium	ppm	ASTM D5185(m)		**2119**	---	---
Phosphorus	ppm	ASTM D5185(m)		**864**	---	---
Zinc	ppm	ASTM D5185(m)		**1003**	---	---
Sulfur	ppm	ASTM D5185(m)		**3366**	---	---
Lithium	ppm	ASTM D5185(m)		**<1**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	**7**	---	---
Sodium	ppm	ASTM D5185(m)		**2**	---	---
Potassium	ppm	ASTM D5185(m)	>20	**<1**	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	▲ **5880**	---	---
Particles >6µm		ASTM D7647	>1300	▲ **1806**	---	---
Particles >14µm		ASTM D7647	>160	**124**	---	---
Particles >21µm		ASTM D7647	>40	**27**	---	---
Particles >38µm		ASTM D7647	>10	**1**	---	---
Particles >71µm		ASTM D7647	>3	**0**	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ **20/18/14**	---	---

OIL ANALYSIS REPORT

Particle Trend

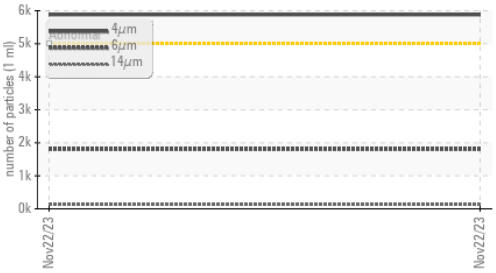

Particle Trend

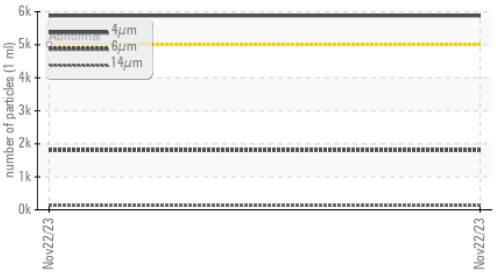

Viscosity @ 40°C

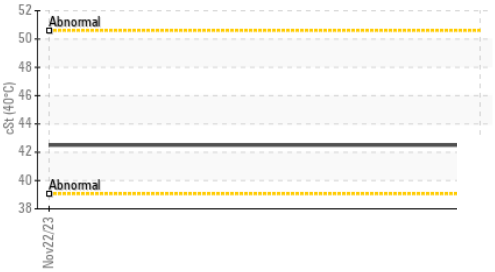

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	**NONE**	---	---
Yellow Metal	scalar	Visual*	NONE	**NONE**	---	---
Precipitate	scalar	Visual*	NONE	**NONE**	---	---
Silt	scalar	Visual*	NONE	**NONE**	---	---
Debris	scalar	Visual*	NONE	**VLITE**	---	---
Sand/Dirt	scalar	Visual*	NONE	**NONE**	---	---
Appearance	scalar	Visual*	NORML	**NORML**	---	---
Odor	scalar	Visual*	NORML	**NORML**	---	---
Emulsified Water	scalar	Visual*	>0.1	**NEG**	---	---
Free Water	scalar	Visual*		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		**42.5**	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				*no image*	*no image*
Bottom				*no image*	*no image*

GRAPHS

Ferrous Alloys

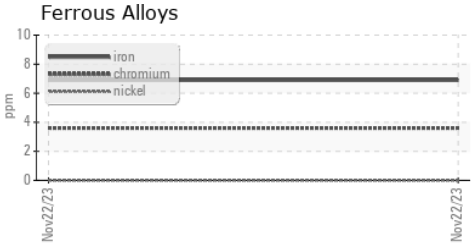

Non-ferrous Metals

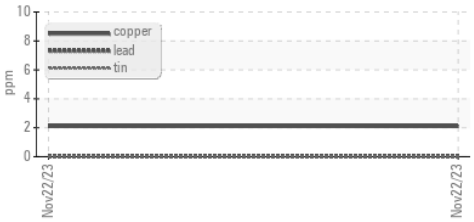

Viscosity @ 40°C

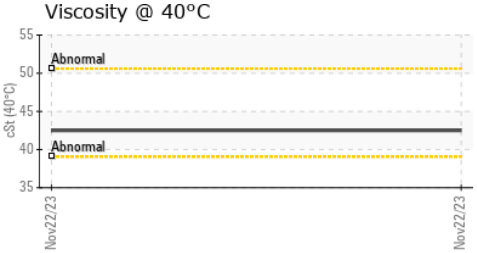

Particle Count

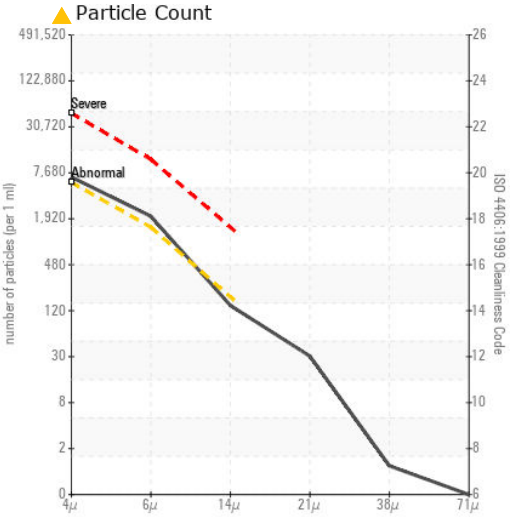

ISO 17025:2017 Accredited Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 780 - GMA - ICI - Solid Waste**
Sample No. : GFL0097074 **Received** : 24 Nov 2023
Lab Number : 02598853 **Diagnosed** : 27 Nov 2023
Unique Number : 5683933 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PrtCount)

4365 boul. St-Elzear Ouest,
Laval, QC
CA H7P 4J3
Contact: Pieces Laval
pieces.laval@gflenv.com
T: (450)687-3838
F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.