OIL ANALYSIS REPORT

Sample Rating Trend

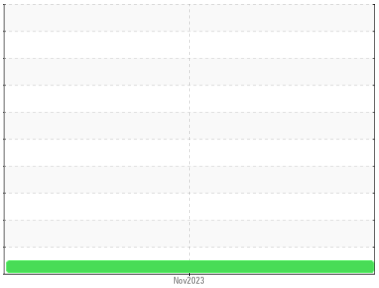

NORMAL

Machine Id
OR419
Component
Rear Differential
Fluid
TDTO FLUID SAE 30 (--- GAL)

DIAGNOSIS

Recommendation
Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) TDTO FLUID SAE 30. Veuillez confirmer.

Wear
Les taux d'usure de tous les composants sont normaux.

Contamination
Il n`y a aucun indice de contamination dans l'huile.

Fluid Condition
L'état de l'huile est acceptable pour la durée de service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**GFL0097073**	---	---
Sample Date		Client Info		**22 Nov 2023**	---	---
Machine Age	hrs	Client Info		**20251**	---	---
Oil Age	hrs	Client Info		**0**	---	---
Oil Changed		Client Info		**Not Changd**	---	---
Sample Status				**NORMAL**	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>.2	**NEG**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>500	**79**	---	---
Chromium	ppm	ASTM D5185(m)	>3	**<1**	---	---
Nickel	ppm	ASTM D5185(m)	>3	**0**	---	---
Titanium	ppm	ASTM D5185(m)	>2	**0**	---	---
Silver	ppm	ASTM D5185(m)	>2	**<1**	---	---
Aluminum	ppm	ASTM D5185(m)	>30	**3**	---	---
Lead	ppm	ASTM D5185(m)	>13	**<1**	---	---
Copper	ppm	ASTM D5185(m)	>103	**4**	---	---
Tin	ppm	ASTM D5185(m)	>5	**0**	---	---
Antimony	ppm	ASTM D5185(m)	>5	**0**	---	---
Vanadium	ppm	ASTM D5185(m)		**0**	---	---
Beryllium	ppm	ASTM D5185(m)		**0**	---	---
Cadmium	ppm	ASTM D5185(m)		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	37	**1**	---	---
Barium	ppm	ASTM D5185(m)	7	**<1**	---	---
Molybdenum	ppm	ASTM D5185(m)	5	**<1**	---	---
Manganese	ppm	ASTM D5185(m)		**<1**	---	---
Magnesium	ppm	ASTM D5185(m)	40	**14**	---	---
Calcium	ppm	ASTM D5185(m)	2650	**3117**	---	---
Phosphorus	ppm	ASTM D5185(m)	1050	**1036**	---	---
Zinc	ppm	ASTM D5185(m)	1075	**1225**	---	---
Sulfur	ppm	ASTM D5185(m)	5750	**8837**	---	---
Lithium	ppm	ASTM D5185(m)		**<1**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>100	**10**	---	---
Sodium	ppm	ASTM D5185(m)		**2**	---	---
Potassium	ppm	ASTM D5185(m)	>20	**<1**	---	---

OIL ANALYSIS REPORT

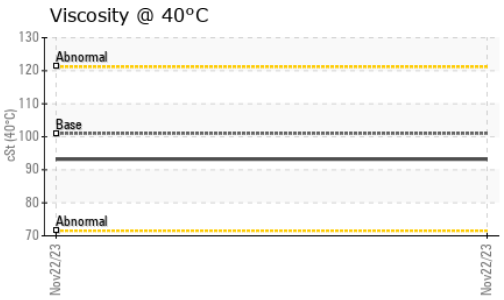

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	**NONE**	---	---
Yellow Metal	scalar	Visual*	NONE	**NONE**	---	---
Precipitate	scalar	Visual*	NONE	**NONE**	---	---
Silt	scalar	Visual*	NONE	**VLITE**	---	---
Debris	scalar	Visual*	NONE	**NONE**	---	---
Sand/Dirt	scalar	Visual*	NONE	**NONE**	---	---
Appearance	scalar	Visual*	NORML	**NORML**	---	---
Odor	scalar	Visual*	NORML	**NORML**	---	---
Emulsified Water	scalar	Visual*	>.2	**NEG**	---	---
Free Water	scalar	Visual*		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	101	**93.2**	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				*no image*	*no image*
Bottom				*no image*	*no image*

GRAPHS

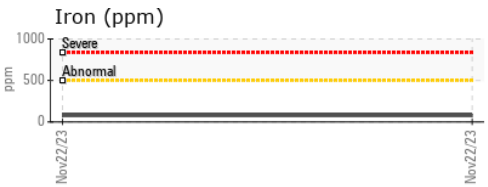

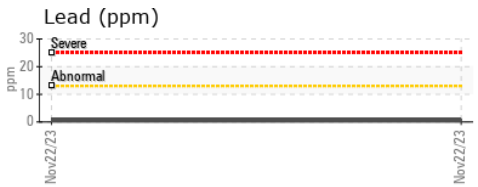

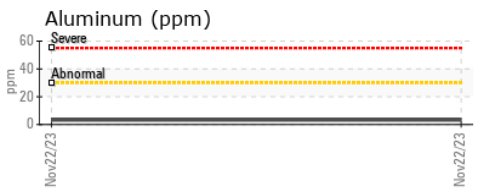

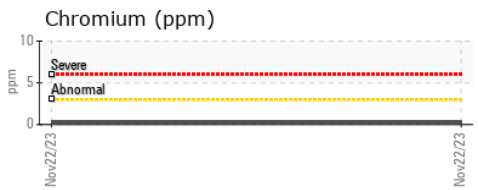

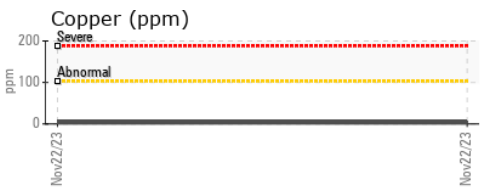

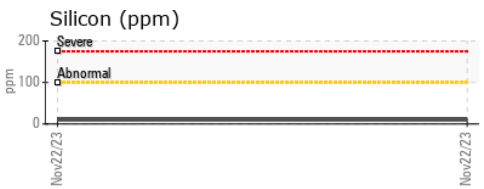

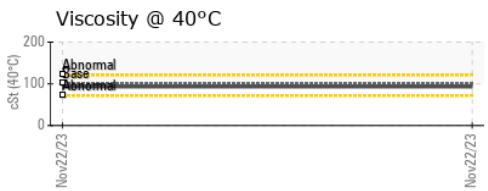

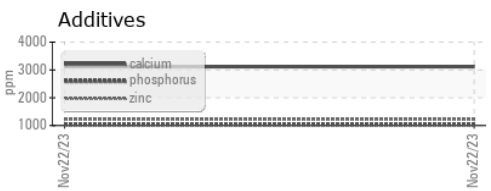

ISO 17025:2017 Accredited Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 780 - GMA - ICI - Solid Waste**
Sample No. : GFL0097073
Lab Number : 02598876
Unique Number : 5683956
Test Package : MOB 1

Received : 24 Nov 2023
Diagnosed : 24 Nov 2023
Diagnostician : Wes Davis

4365 boul. St-Elzear Ouest,
Laval, QC
CA H7P 4J3
Contact: Pieces Laval
pieces.laval@gflenv.com
T: (450)687-3838
F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.