

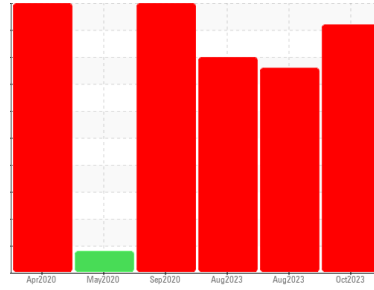
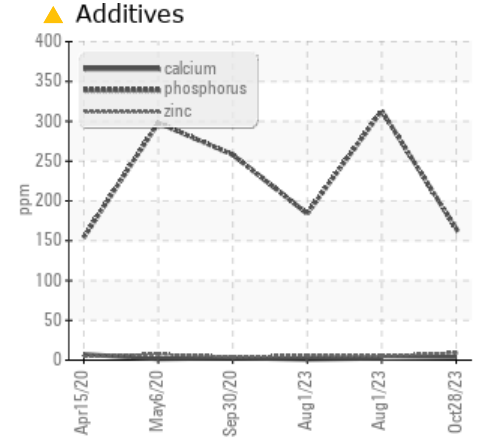


Area
Fwd Machinery Space
Machine Id
Thruster Aft Port - Steering Tube Seal (S/N Sample Tag CL-06002-S5)
Component
Steering
Fluid
CASTROL ALPHA SP150 (35 LTR)

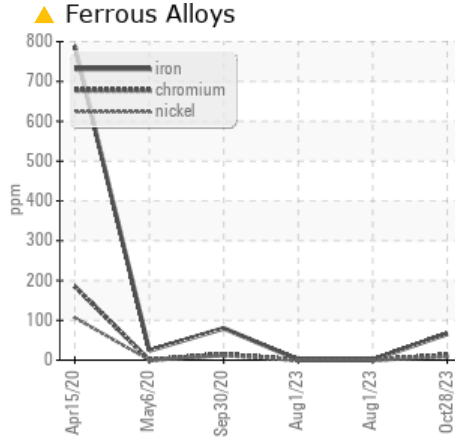

COMPONENT CONDITION SUMMARY

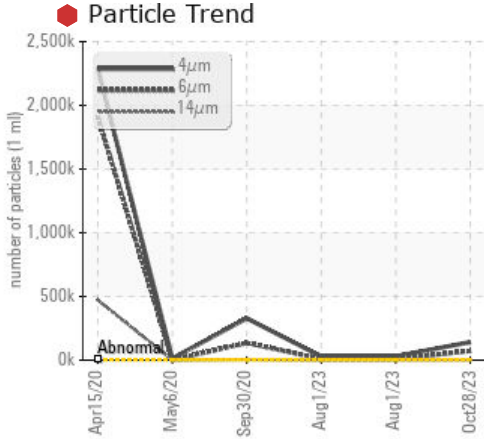

RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We recommend that you drain the fluid from the component if this has not already been done. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	SEVERE	SEVERE	
Iron	ppm	ASTM D5185(m)	>50	▲ 66	1	1
Chromium	ppm	ASTM D5185(m)	>15	▲ 13	0	0
Nickel	ppm	ASTM D5185(m)	>5	▲ 8	0	0
Phosphorus	ppm	ASTM D5185(m)	330	▲ 165	313	184
Particles >4µm		ASTM D7647	>2500	◆ 141470	28125	30533
Particles >6µm		ASTM D7647	>640	◆ 72521	9254	9290
Particles >14µm		ASTM D7647	>80	◆ 1184	749	737
Particles >21µm		ASTM D7647	>20	▲ 138	280	199
Particles >38µm		ASTM D7647	>4	▲ 7	5	▲ 8
Oil Cleanliness		ISO 4406 (c)	>18/16/13	◆ 24/23/17	22/20/17	22/20/17

Customer Id: TERHAM
Sample No.: PC0052813
Lab Number: 02599123
Test Package: MAR 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the fluid from the component if this has not already been done.
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Dirt Access	---	---	?	We advise that you check all areas where contaminants can enter the system.

HISTORICAL DIAGNOSIS

01 Aug 2023 Diag: Kevin Marson

ISO



We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. All component wear rates are normal. There is a high amount of particulates (2 to 100 microns in size) present in the fluid. The AN level is acceptable for this fluid. The fluid is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



01 Aug 2023 Diag: Kevin Marson

ISO



We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. All component wear rates are normal. There is a high amount of particulates (2 to 100 microns in size) present in the fluid. The AN level is acceptable for this fluid. The fluid is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



30 Sep 2020 Diag: Kevin Marson

ISO




Check seals and/or filters for points of contaminant entry. We advise that you check all areas where contaminants can enter the system. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We advise that you use off-line filtration with water adsorbent filters to attempt to remove the water from this fluid. We recommend that you drain the fluid from the component if this has not already been done. We recommend that you change the oil. Resample in 30-45 days to monitor this situation. Chromium, iron and nickel ppm levels are abnormal. Particles >14µm are severely high. Particles >21µm are severely high. Particles >6µm are severely high. Particles >4µm are severely high. Particles >4µm are severely high.. Particles >4µm are severely high... Particles >38µm are abnormally high. There is a moderate concentration of water present in the fluid. Free water present. The white residue present in the sample is fluid additive precipitate. The AN level is acceptable for this fluid. The fluid is no longer serviceable as a result of the abnormal and/or severe wear.

view report



Area
Fwd Machinery Space
Machine Id
Thruster Aft Port - Steering Tube Seal (S/N Sample Tag CL-06002-S5)
Component
Steering
Fluid
CASTROL ALPHA SP150 (35 LTR)

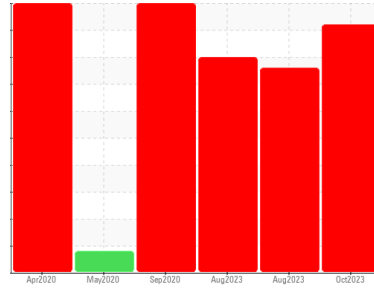

DIAGNOSIS

Recommendation

We advise that you check all areas where contaminants can enter the system. We recommend that you drain the fluid from the component if this has not already been done. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation.

Wear

Iron and nickel ppm levels are abnormal. Chromium ppm levels are marginal.

Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the fluid.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of fluid. The AN level is acceptable for this fluid. The fluid is no longer serviceable as a result of the abnormal and/or severe wear. NOTE: The color of the oil is darker than previous samples.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC0052813	PC	PC
Sample Date	Client Info	28 Oct 2023	01 Aug 2023	01 Aug 2023
Machine Age	hrs	0	0	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		SEVERE	SEVERE	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	0	10	6
Iron	ppm ASTM D5185(m) >50	▲ 66	1	1
Chromium	ppm ASTM D5185(m) >15	▲ 13	0	0
Nickel	ppm ASTM D5185(m) >5	▲ 8	0	0
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m)	<1	0	0
Aluminum	ppm ASTM D5185(m) >5	<1	<1	<1
Lead	ppm ASTM D5185(m) >10	<1	0	0
Copper	ppm ASTM D5185(m) >50	<1	<1	<1
Tin	ppm ASTM D5185(m) >5	0	0	0
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0






ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	4	4	14
Barium	ppm ASTM D5185(m) 4	0	0	0
Molybdenum	ppm ASTM D5185(m)	2	0	0
Manganese	ppm ASTM D5185(m)	1	0	0
Magnesium	ppm ASTM D5185(m) 4	2	1	<1
Calcium	ppm ASTM D5185(m) 4	4	2	1
Phosphorus	ppm ASTM D5185(m) 330	▲ 165	313	184
Zinc	ppm ASTM D5185(m) 4	9	5	6
Sulfur	ppm ASTM D5185(m)	9199	7994	9782
Lithium	ppm ASTM D5185(m)	1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	4	6	3
Sodium	ppm ASTM D5185(m)	12	<1	0
Potassium	ppm ASTM D5185(m) >20	0	<1	<1

OIL ANALYSIS REPORT

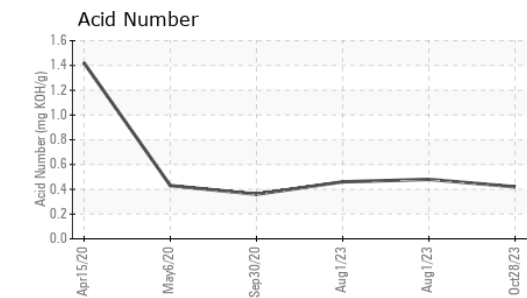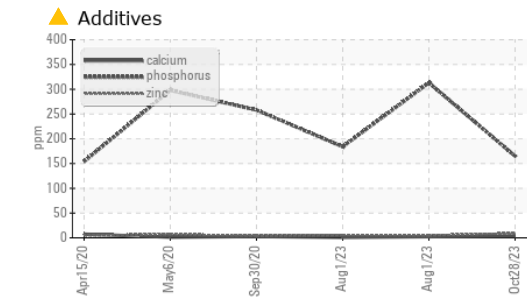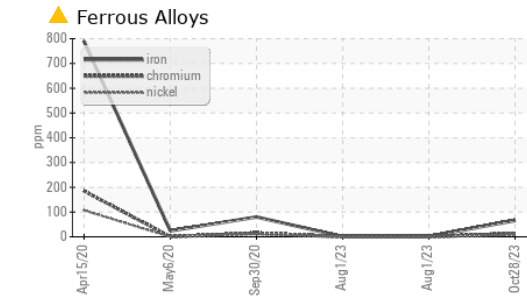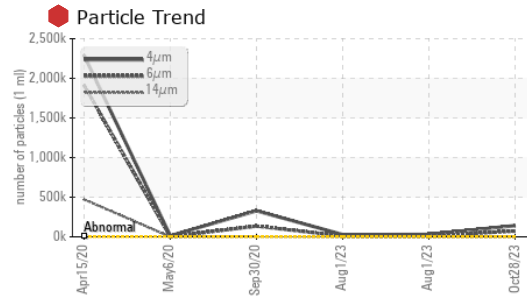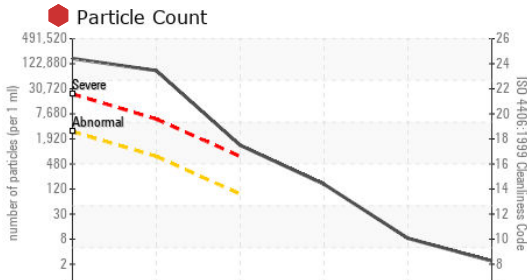

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0052813
Lab Number : 02599123
Unique Number : 5684203
Test Package : MAR 2 (Additional Tests: KV100, PQ, PrtCount, TAN Man, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.


FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	141470	28125	30533	
Particles >6µm	ASTM D7647	>640	72521	9254	9290	
Particles >14µm	ASTM D7647	>80	1184	749	737	
Particles >21µm	ASTM D7647	>20	138	280	199	
Particles >38µm	ASTM D7647	>4	7	5	8	
Particles >71µm	ASTM D7647	>3	2	0	1	
Oil Cleanliness	ISO 4406 (c)	>18/16/13	24/23/17	22/20/17	22/20/17	

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.42	0.48	0.46

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	VLITE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	VLITE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	150.0	147	142	142
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	14.4	14.2	14.2
Viscosity Index (VI)	Scale	ASTM D2270*	95	95	97	97

SAMPLE IMAGES

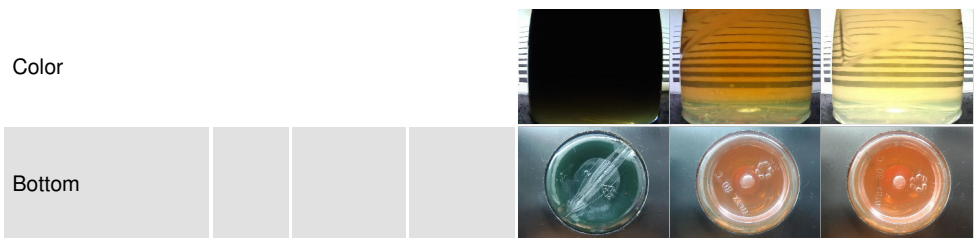

Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Street
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshhynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835