

# **OIL ANALYSIS REPORT**

#### Sample Rating Trend



# Machine Id **D7620**

#### Component Compressor Fluid

PETRO CANADA REFLO 68A AMMONIA OIL (--- GAL)

# DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The water content is negligible. There is no indication of any contamination in the oil.


### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC0052545	PC0052630	
Sample Date		Client Info		12 Nov 2023	11 Dec 2022	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
WEAR METAL	S	method	limit/base	current	history1	history2
PQ		ASTM D8184*		0	0	
Iron	ppm	ASTM D5185(m)	>50	11	4	
Chromium	ppm	ASTM D5185(m)	>10	0	0	
Nickel	ppm	ASTM D5185(m)		<1	<1	
Titanium	ppm	ASTM D5185(m)		0	0	
Silver	ppm	ASTM D5185(m)		<1	0	
Aluminum	ppm	ASTM D5185(m)	>25	<1	<1	
Lead	ppm	ASTM D5185(m)	>25	<1	<1	
Copper	ppm	ASTM D5185(m)	>50	2	2	
Tin	ppm	ASTM D5185(m)	>15	0	0	
Antimony	ppm	ASTM D5185(m)		0	0	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<1	<1	
Barium	ppm	ASTM D5185(m)	0	<1	0	
Molybdenum	ppm	ASTM D5185(m)	0	0	0	
Manganese	ppm	ASTM D5185(m)		0	0	
Magnesium	ppm	ASTM D5185(m)	0	0	0	
Calcium	ppm	ASTM D5185(m)	0	3	<1	
Phosphorus	ppm	ASTM D5185(m)	0	8	8	
Zinc	ppm	ASTM D5185(m)	0	7	8	
Sulfur	ppm	ASTM D5185(m)	0	139	158	
Lithium	ppm	ASTM D5185(m)		<1	<1	
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	0	0	
Sodium	ppm	ASTM D5185(m)		<1	0	
Potassium	ppm	ASTM D5185(m)	>20	0	0	
Water	%	ASTM D6304*	>0.1	0.001	0.001	
ppm Water	ppm	ASTM D6304*	>1000	12	0.1	
FLUID DEGRAD	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.05	0.06	0.09	



# **OIL ANALYSIS REPORT**

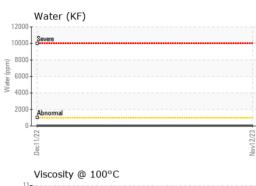



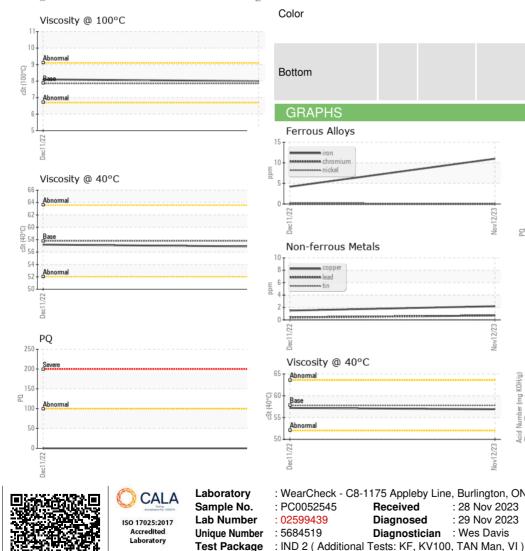

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	
ellow Metal	scalar	Visual*	NONE	NONE	NONE	
Precipitate	scalar	Visual*	NONE	NONE	NONE	
Silt	scalar	Visual*	NONE	NONE	NONE	
Debris	scalar	Visual*	NONE	VLITE	NONE	
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	
Appearance	scalar	Visual*	NORML	NORML	NORML	
Ddor	scalar	Visual*	NORML	NORML	NORML	
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	
Free Water	scalar	Visual*		NEG	NEG	
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
′isc @ 40°C	cSt	ASTM D7279(m)	57.8	56.9	57.2	
/isc @ 100°C	cSt	ASTM D7279(m)	7.86	8	8.1	
/iscosity Index (VI)	Scale	ASTM D2270*	101	107	109	
				-		la la tana 0
SAMPLE IMAG	iES	method	limit/base	current	history1	history2
Color						no image
Bottom						no image
GRAPHS						
Ferrous Alloys				PQ		
iron			220	Savara		
chromium			200			
			180			
			160			
1/22			£2/2			
Dec11/22			120 Nov12/23	Abaamaal		
Non-ferrous Metal	s		100			
copper			80	•		
Reseases lead			60			
			40			
			20	•		
/22			0	52		2
Dec11			Nov12/23	Dec11/22		2.07 Lively
 Viscosity @ 40°C			—	Acid Number		N
Abnormal			Ş <sup>°</sup> 1.50			
Pres			()1.50 1.00 0.50 0.00 0.00	Severe Abnormal		
Base Q			per (1)	   		
Abnormal			B 0.50	Pres		
				Pase 2		C.
Dec11/22			Nov12/23	Dec11/22		C C Lund
D			No	D		N
WearCheck - C8-11	75 Annle	by line Bur	inaton ON L	7I 5H9	Labatt - St. Jo	hn`s Brewer
	Receive		Nov 2023	0110		0 Leslie Stree
00002010						0 200.00 00.00

CA A1E 2V8 Contact: Rod Penney rod.penney@labatt.com T: (709)570-7152 F: (709)570-7160

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Diagnostician : Wes Davis