





Machine Id  
**NO UNIT PC0052542**  
Component  
**Gearbox**  
Fluid  
**SAE 80W90 (--- GAL)**

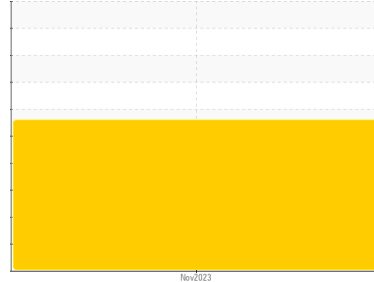

**COMPONENT CONDITION SUMMARY**

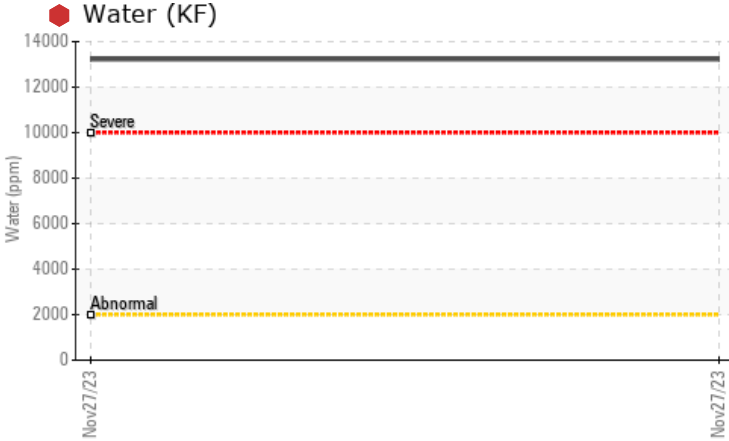

**RECOMMENDATION**

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We advise that you check for the source of water entry. Check seals and/or filters for points of contaminant entry. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

**PROBLEMATIC TEST RESULTS**

Sample Status				SEVERE	---	---
Water	%	ASTM D6304*	>0.2	🔴 <b>1.322</b>	---	---
ppm Water	ppm	ASTM D6304*	>2000	🔴 <b>13229</b>	---	---
Appearance	scalar	Visual*	NORML	🟡 <b>LAYRD</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	🟡 <b>.5%</b>	---	---
Free Water	scalar	Visual*		🟡 <b>5%</b>	---	---

**Customer Id:** LABSTJ  
**Sample No.:** PC0052542  
**Lab Number:** 02599540  
**Test Package:** IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)


## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Alert	---	---	?	Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment.
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.
Check Water Access	---	---	?	We advise that you check for the source of water entry.
Check Seals	---	---	?	Check seals and/or filters for points of contaminant entry.

## HISTORICAL DIAGNOSIS



Machine Id  
**NO UNIT PC0052542**  
Component  
**Gearbox**  
Fluid  
**SAE 80W90 (--- GAL)**

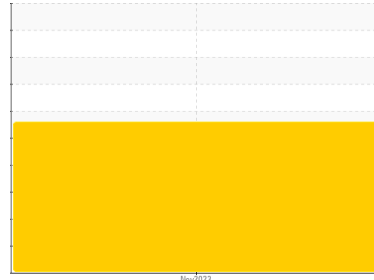

**DIAGNOSIS**

**Recommendation**  
Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We advise that you check for the source of water entry. Check seals and/or filters for points of contaminant entry. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is a high concentration of water present in the oil. Free water present.

**Fluid Condition**  
The AN level is acceptable for this fluid. The oil is no longer serviceable due to the presence of contaminants.

**SAMPLE INFORMATION**

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PC0052542</b>	---	---
Sample Date	Client Info	<b>27 Nov 2023</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>SEVERE</b>	---	---

**WEAR METALS**

method	limit/base	current	history1	history2
PQ	ASTM D8184*	<b>0</b>	---	---
Iron	ppm ASTM D5185(m) >200	<b>4</b>	---	---
Chromium	ppm ASTM D5185(m) >15	<b>0</b>	---	---
Nickel	ppm ASTM D5185(m) >15	<b>9</b>	---	---
Titanium	ppm ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm ASTM D5185(m)	<b>&lt;1</b>	---	---
Aluminum	ppm ASTM D5185(m) >25	<b>&lt;1</b>	---	---
Lead	ppm ASTM D5185(m) >100	<b>&lt;1</b>	---	---
Copper	ppm ASTM D5185(m) >200	<b>&lt;1</b>	---	---
Tin	ppm ASTM D5185(m) >25	<b>0</b>	---	---
Antimony	ppm ASTM D5185(m) >5	<b>0</b>	---	---
Vanadium	ppm ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm ASTM D5185(m)	<b>0</b>	---	---

**ADDITIVES**

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 200	<b>30</b>	---	---
Barium	ppm ASTM D5185(m) 0	<b>&lt;1</b>	---	---
Molybdenum	ppm ASTM D5185(m) 0	<b>0</b>	---	---
Manganese	ppm ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm ASTM D5185(m) 0	<b>&lt;1</b>	---	---
Calcium	ppm ASTM D5185(m) 20	<b>4</b>	---	---
Phosphorus	ppm ASTM D5185(m) 1000	<b>960</b>	---	---
Zinc	ppm ASTM D5185(m) 20	<b>5</b>	---	---
Sulfur	ppm ASTM D5185(m) 22000	<b>18550</b>	---	---
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	---	---





**CONTAMINANTS**

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >50	<b>2</b>	---	---
Sodium	ppm ASTM D5185(m) >50	<b>2</b>	---	---
Potassium	ppm ASTM D5185(m) >20	<b>&lt;1</b>	---	---
Water	% ASTM D6304* >0.2	<b>1.322</b>	---	---
ppm Water	ppm ASTM D6304* >2000	<b>13229</b>	---	---

**FLUID DEGRADATION**

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974*	<b>1.43</b>	---	---

# OIL ANALYSIS REPORT

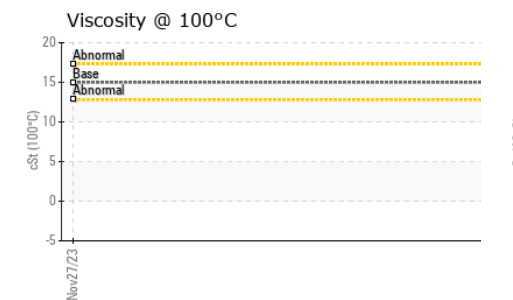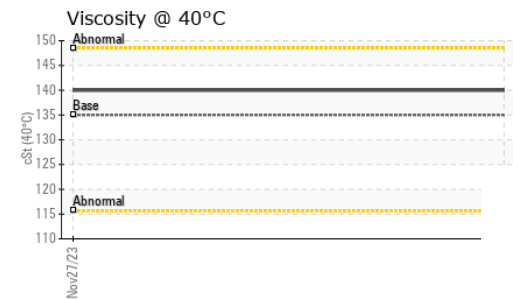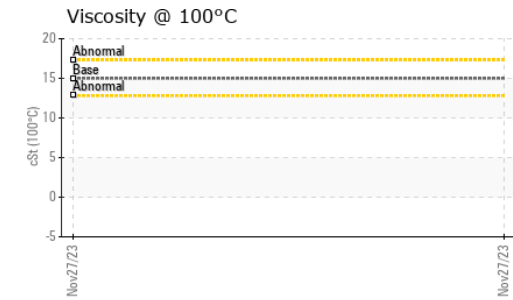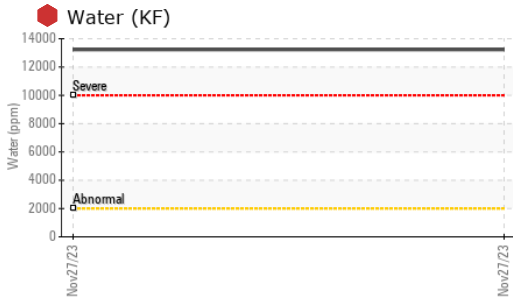




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	▲ LAYRD	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	▲ .5%	---
Free Water	scalar	Visual*		▲ 5%	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	135	140	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

## GRAPHS

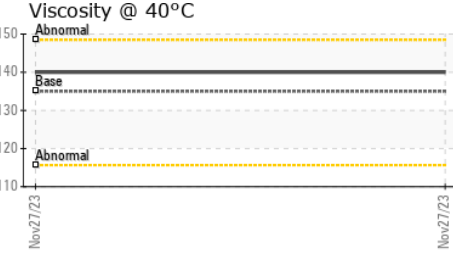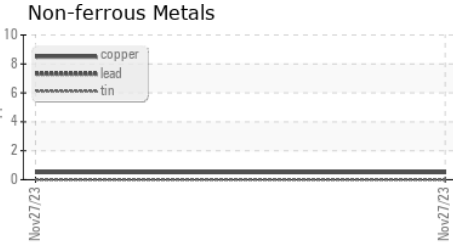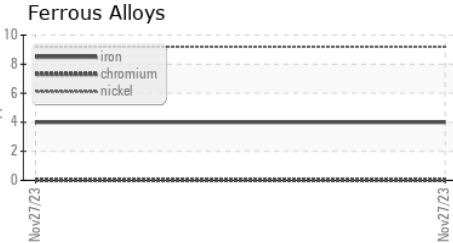

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0052542 **Received** : 28 Nov 2023  
**Lab Number** : 02599540 **Diagnosed** : 30 Nov 2023  
**Unique Number** : 5684620 **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, TAN Man, VI )

**Labatt - St. John's Brewery**  
 60 Leslie Street  
 St John's, NL  
 CA A1E 2V8  
 Contact: Kevin Morden  
 kevin.morden@labatt.com  
 T: (709)579-0124  
 F: (709)579-2018

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.