


PROBLEM SUMMARY



Machine Id
CATERPILLAR 30-134 (S/N EEH00543)
Component
Pre-Flush Hydraulic System
Fluid
CAT TO-4 10W (260 LTR)

Sample Rating Trend

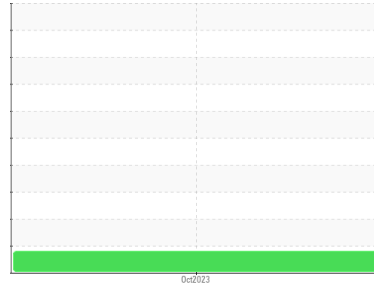


ISO



COMPONENT CONDITION SUMMARY

▲ Particle Trend

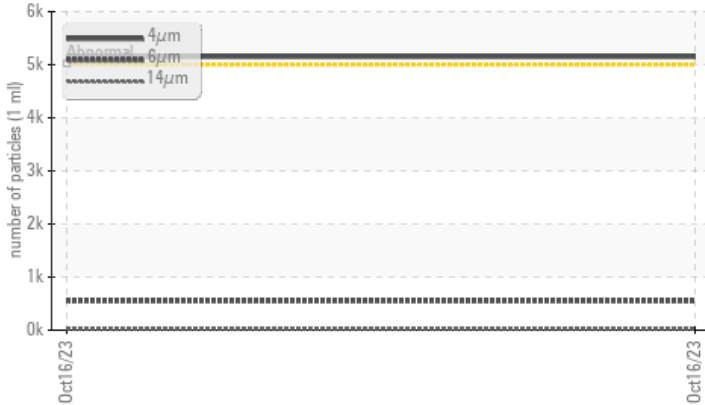

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | ATTENTION | --- | --- |
|-----------------|-----------------------------------|-----|-----|
| Particles >4µm | ASTM D7647 >5000 ▲ 5151 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) >19/17/14 ▲ 20/16/12 | --- | --- |

Customer Id: LESNEW
Sample No.: PC0069832
Lab Number: 02600514
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id
CATERPILLAR 30-134 (S/N EEH00543)
Component
Pre-Flush Hydraulic System
Fluid
CAT TO-4 10W (260 LTR)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|--------------|----------|
| Sample Number | Client Info | PC0069832 | --- | --- |
| Sample Date | Client Info | 16 Oct 2023 | --- | --- |
| Machine Age | hrs | Client Info | 15546 | --- |
| Oil Age | hrs | Client Info | 3000 | --- |
| Oil Changed | Client Info | Changed | --- | --- |
| Sample Status | | ATTENTION | --- | --- |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|------------|---------|------------|----------|
| Water | WC Method | >0.05 | NEG | --- |

WEAR METALS

| method | limit/base | current | history1 | history2 | | |
|-----------|------------|---------------|----------|--------------|-----|-----|
| Iron | ppm | ASTM D5185(m) | >20 | 6 | --- | --- |
| Chromium | ppm | ASTM D5185(m) | >20 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185(m) | >20 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) | | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) | >20 | 2 | --- | --- |
| Lead | ppm | ASTM D5185(m) | >20 | 3 | --- | --- |
| Copper | ppm | ASTM D5185(m) | >20 | 6 | --- | --- |
| Tin | ppm | ASTM D5185(m) | >20 | 0 | --- | --- |
| Antimony | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Beryllium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185(m) | | 0 | --- | --- |

ADDITIVES

| method | limit/base | current | history1 | history2 | | |
|------------|------------|---------------|----------|--------------|-----|-----|
| Boron | ppm | ASTM D5185(m) | | 14 | --- | --- |
| Barium | ppm | ASTM D5185(m) | | <1 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) | | 17 | --- | --- |
| Manganese | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) | | 210 | --- | --- |
| Calcium | ppm | ASTM D5185(m) | | 1690 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) | | 821 | --- | --- |
| Zinc | ppm | ASTM D5185(m) | | 1044 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) | | 2535 | --- | --- |
| Lithium | ppm | ASTM D5185(m) | | <1 | --- | --- |

CONTAMINANTS


| method | limit/base | current | history1 | history2 | | |
|-----------|------------|---------------|----------|-----------|-----|-----|
| Silicon | ppm | ASTM D5185(m) | >15 | 11 | --- | --- |
| Sodium | ppm | ASTM D5185(m) | | 15 | --- | --- |
| Potassium | ppm | ASTM D5185(m) | >20 | 2 | --- | --- |

FLUID CLEANLINESS

| method | limit/base | current | history1 | history2 | |
|-----------------|--------------|-----------|-------------------|----------|-----|
| Particles >4µm | ASTM D7647 | >5000 | ▲ 5151 | --- | --- |
| Particles >6µm | ASTM D7647 | >1300 | 550 | --- | --- |
| Particles >14µm | ASTM D7647 | >160 | 23 | --- | --- |
| Particles >21µm | ASTM D7647 | >40 | 5 | --- | --- |
| Particles >38µm | ASTM D7647 | >10 | 1 | --- | --- |
| Particles >71µm | ASTM D7647 | >3 | 1 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | ▲ 20/16/12 | --- | --- |

OIL ANALYSIS REPORT


▲ Particle Trend

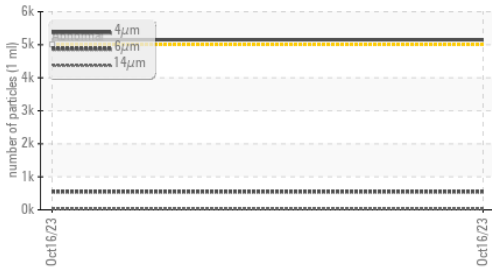

● Viscosity @ 100°C



Acid Number

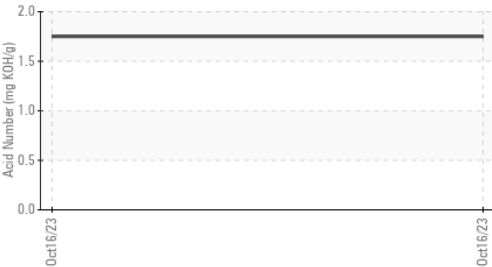

● Viscosity @ 100°C



● Viscosity @ 40°C



FLUID DEGRADATION method limit/base current history1 history2

Acid Number (AN) mg KOH/g ASTM D974* **1.75** --- ---

VISUAL method limit/base current history1 history2

| | | | | | | |
|------------------|--------|---------|-------|--------------|-----|-----|
| White Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Precipitate | scalar | Visual* | NONE | NONE | --- | --- |
| Silt | scalar | Visual* | NONE | NONE | --- | --- |
| Debris | scalar | Visual* | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- | --- |
| Odor | scalar | Visual* | NORML | NORML | --- | --- |
| Emulsified Water | scalar | Visual* | >0.05 | NEG | --- | --- |
| Free Water | scalar | Visual* | | NEG | --- | --- |

FLUID PROPERTIES method limit/base current history1 history2


| | | | | | | |
|----------------------|-------|---------------|--|-------------|-----|-----|
| Visc @ 40°C | cSt | ASTM D7279(m) | | 44.5 | --- | --- |
| Visc @ 100°C | cSt | ASTM D7279(m) | | 7.2 | --- | --- |
| Viscosity Index (VI) | Scale | ASTM D2270* | | 122 | --- | --- |

SAMPLE IMAGES method limit/base current history1 history2

| | | | | | | |
|--------|--|--|--|--|--|--|
| Color | | | | | | |
| Bottom | | | | | | |

GRAPHS

Ferrous Alloys

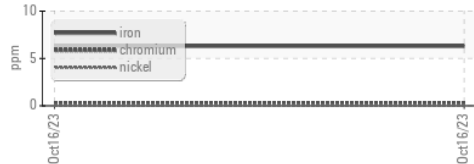


Non-ferrous Metals



Viscosity @ 40°C



▲ Particle Count

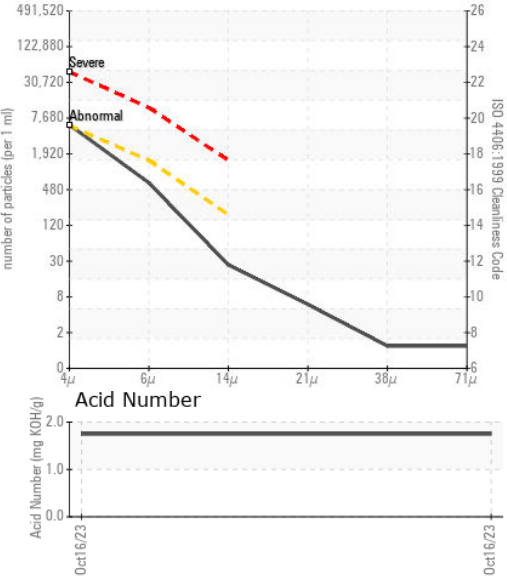

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0069832 **Received** : 04 Dec 2023
Lab Number : 02600514 **Diagnosed** : 05 Dec 2023
Unique Number : 5685594 **Diagnostician** : Wes Davis
Test Package : IND 2 (Additional Tests: KV100, TAN Man, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

LES ENTREPRISES PEC
 152 CHEMIN DE SAINT-EDGAR
 NEW RICHMOND, QC
 CA G0C 2B0
 Contact: Service Manager
 info@lepec.ca
 T: (418)534-3777
 F: