




# OIL ANALYSIS REPORT

Sample Rating Trend

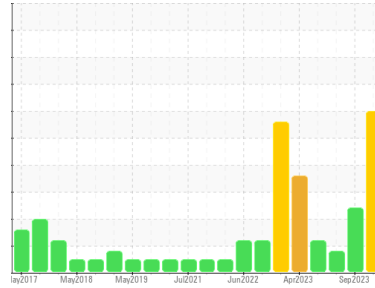

GLYCOL



Machine Id  
**4793**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. We advise that you check for the source of the coolant leak. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Test for glycol is positive. There is a high amount of fuel present in the oil. There is a light concentration of glycol present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0101719</b>	GFL0093911	GFL0085924
Sample Date	Client Info	<b>25 Nov 2023</b>	14 Sep 2023	05 Jul 2023
Machine Age	hrs	<b>1941</b>	18867	18345
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	Changed	N/A
Sample Status		<b>SEVERE</b>	ABNORMAL	MARGINAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >110	<b>30</b>	21	11
Chromium	ppm ASTM D5185(m) >4	<b>1</b>	<1	<1
Nickel	ppm ASTM D5185(m) >2	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m) >2	<b>&lt;1</b>	<1	0
Aluminum	ppm ASTM D5185(m) >25	<b>2</b>	2	2
Lead	ppm ASTM D5185(m) >45	<b>&lt;1</b>	<1	<1
Copper	ppm ASTM D5185(m) >85	<b>1</b>	1	<1
Tin	ppm ASTM D5185(m) >4	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 2	<b>3</b>	1	1
Barium	ppm ASTM D5185(m) 0	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185(m) 50	<b>58</b>	52	56
Manganese	ppm ASTM D5185(m) 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185(m) 950	<b>761</b>	804	936
Calcium	ppm ASTM D5185(m) 1050	<b>843</b>	869	968
Phosphorus	ppm ASTM D5185(m) 995	<b>754</b>	843	1028
Zinc	ppm ASTM D5185(m) 1180	<b>941</b>	983	1147
Sulfur	ppm ASTM D5185(m) 2600	<b>2034</b>	2093	2442
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS


method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >30	<b>5</b>	5	6
Sodium	ppm ASTM D5185(m)	<b>▲ 252</b>	90	25
Potassium	ppm ASTM D5185(m) >20	<b>2</b>	0	1
Fuel	% ASTM D7593*	<b>◆ 9.7</b>	▲ 7.9	▲ 4.2
Glycol	% ASTM D7922*	<b>▲ 0.022</b>	0.0	NEG

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	<b>0.8</b>	0.5	0.2
Nitration	Abs/cm ASTM D7624* >20	<b>13.8</b>	11.6	8.1
Sulfation	Abs./1mm ASTM D7415* >30	<b>25.5</b>	26.4	21.5



# OIL ANALYSIS REPORT










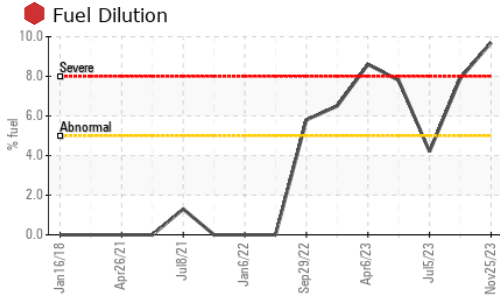


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	27.4	▲ 30.6	19.7

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	▲ 9.7	▲ 9.4	10.6

## GRAPHS

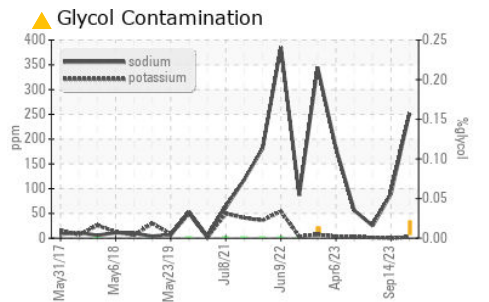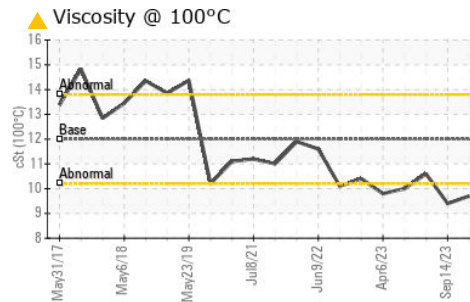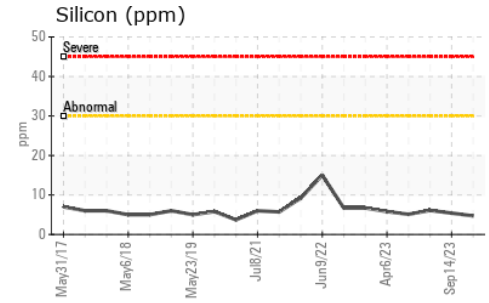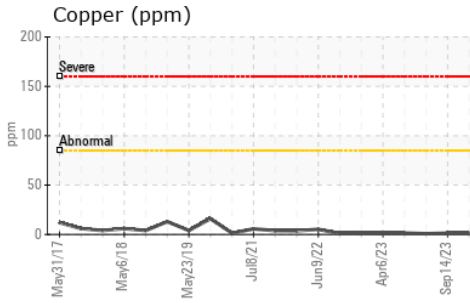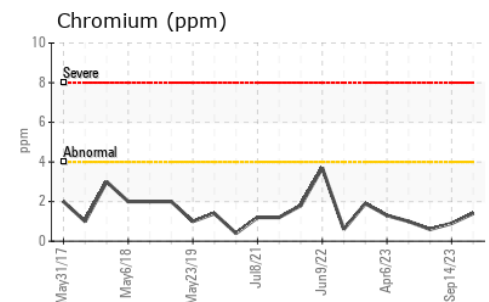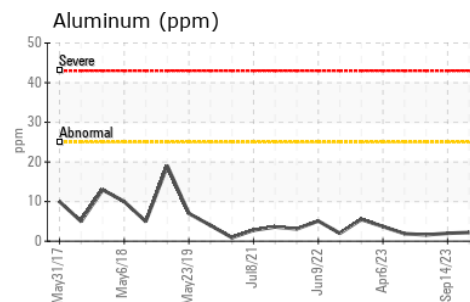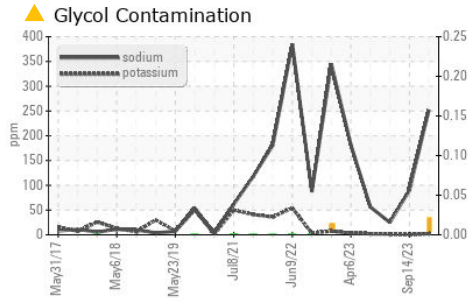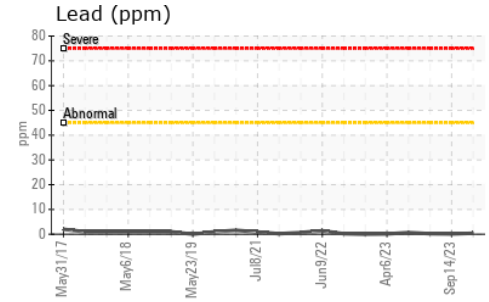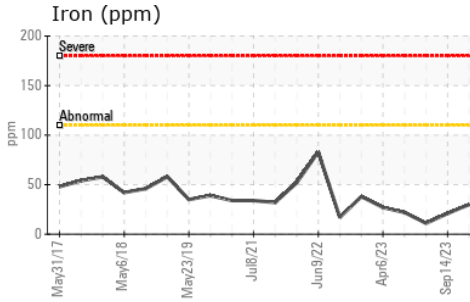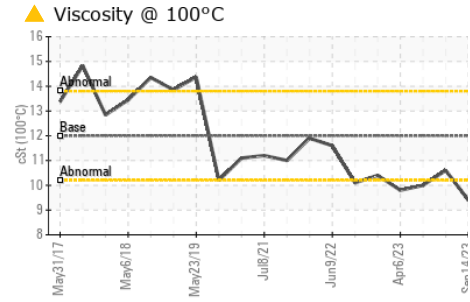

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW  
**Sample No.** : GFL0101719 **Received** : 05 Dec 2023  
**Lab Number** : 02600912 **Diagnosed** : 06 Dec 2023  
**Unique Number** : 5693997 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: Glycol, PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

8409 - 15th Street NW  
 Edmonton, AB  
 CA T6P 0B8  
 Contact: Tim Greig  
 tgreig@gflenv.com  
 T: (780)231-0521  
 F: