




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
OR872
 Component
Transmission (Manual)
 Fluid
PETRO CANADA PRODURO TO-4 SAE 30 (--- GAL)

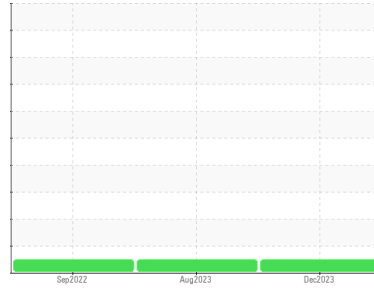

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0100645	GFL0077027	GFL0054680
Sample Date	Client Info		01 Dec 2023	10 Aug 2023	02 Sep 2022
Machine Age	hrs	Client Info	21348	20882	19622
Oil Age	hrs	Client Info	466	1260	1500
Oil Changed	Client Info		Not Chngd	Not Chngd	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>200	6	12	12
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	<1	<1
Silver	ppm	ASTM D5185(m)	>7	<1	0	0
Aluminum	ppm	ASTM D5185(m)	>25	1	2	1
Lead	ppm	ASTM D5185(m)	>45	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>225	2	4	13
Tin	ppm	ASTM D5185(m)	>10	0	0	<1
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES


	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	2	5	4
Barium	ppm	ASTM D5185(m)	0	<1	0	0
Molybdenum	ppm	ASTM D5185(m)	0	2	13	<1
Manganese	ppm	ASTM D5185(m)	9	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	1	9	12	11
Calcium	ppm	ASTM D5185(m)	3131	3121	3143	3151
Phosphorus	ppm	ASTM D5185(m)	1194	999	1112	1028
Zinc	ppm	ASTM D5185(m)	1281	1225	1261	1143
Sulfur	ppm	ASTM D5185(m)	3811	5113	5238	3675
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>125	3	4	3
Sodium	ppm	ASTM D5185(m)		2	2	1
Potassium	ppm	ASTM D5185(m)	>20	<1	2	3




OIL ANALYSIS REPORT

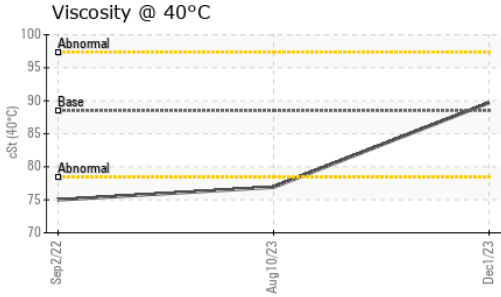


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	88.5	89.7	76.9	75.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

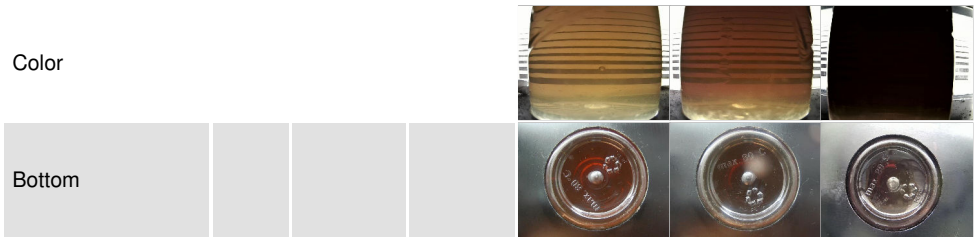

GRAPHS

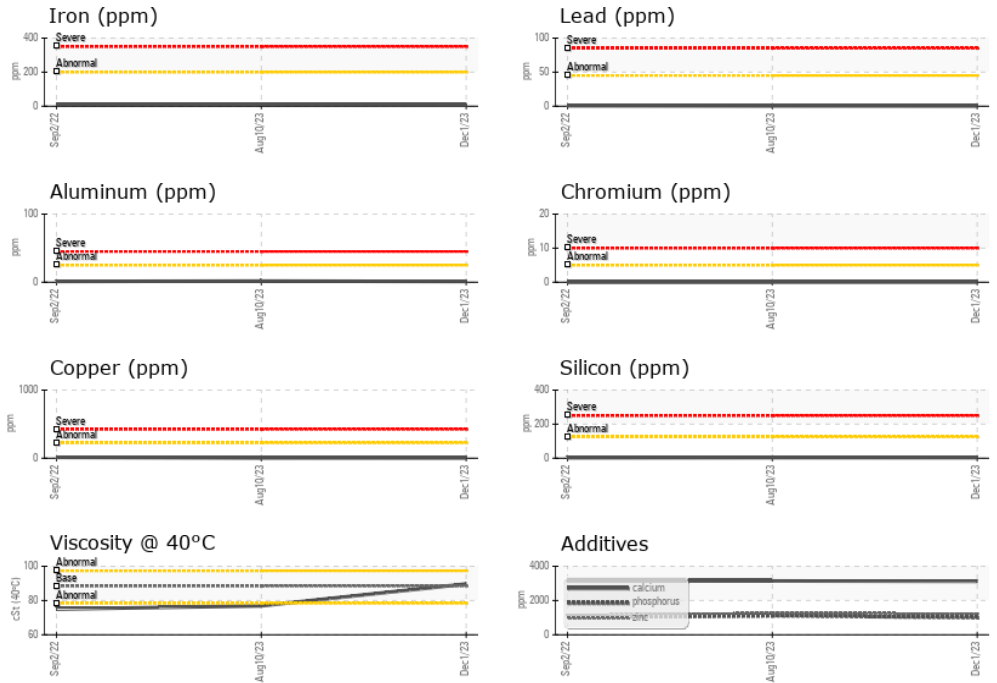

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 575 - Squamish Hauling
Sample No. : GFL0100645 **Received** : 06 Dec 2023 38950 Queens Way,
Lab Number : **02601278** **Diagnosed** : 06 Dec 2023 Squamish, BC
Unique Number : 5694363 **Diagnostician** : Wes Davis CA V8B 0K8
Test Package : MOB 1 Contact: Dean Imbeau
dimbeau@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (604)892-5604
 F: (604)892-5238