


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

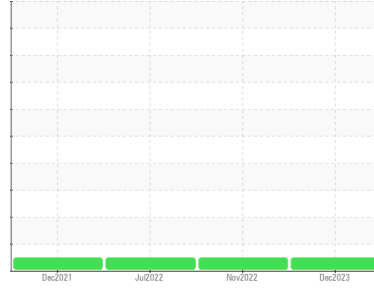

Area
Vessel
Machine Id
KAT 03 (AUX. GEN. #1)
Component
1 Auxiliary Engine
Fluid
PETRO CANADA CM MHP 153 (500 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0080307	PC0031774	PC0018619
Sample Date	Client Info		07 Dec 2023	08 Nov 2022	24 Jul 2022
Machine Age	hrs	Client Info	16653	16500	16410
Oil Age	hrs	Client Info	16653	16500	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.1	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m) >35	4	4	3
Chromium	ppm	ASTM D5185(m) >4	0	0	0
Nickel	ppm	ASTM D5185(m) >2	<1	<1	<1
Titanium	ppm	ASTM D5185(m) >2	0	<1	<1
Silver	ppm	ASTM D5185(m) >2	<1	0	0
Aluminum	ppm	ASTM D5185(m) >25	2	1	1
Lead	ppm	ASTM D5185(m) >7	<1	1	<1
Copper	ppm	ASTM D5185(m) >65	<1	<1	<1
Tin	ppm	ASTM D5185(m) >4	0	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	2	5	5
Barium	ppm	ASTM D5185(m)	<1	0	0
Molybdenum	ppm	ASTM D5185(m)	<1	2	2
Manganese	ppm	ASTM D5185(m)	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	26	27	26
Calcium	ppm	ASTM D5185(m)	5301	5373	5394
Phosphorus	ppm	ASTM D5185(m)	846	917	855
Zinc	ppm	ASTM D5185(m) 1090	983	953	966
Sulfur	ppm	ASTM D5185(m)	8324	7985	8130
Lithium	ppm	ASTM D5185(m)	<1	<1	<1





CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	11	6	6
Sodium	ppm	ASTM D5185(m)	2	<1	<1
Potassium	ppm	ASTM D5185(m) >20	1	<1	1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	0	0
Nitration	Abs/cm	ASTM D7624* >20	7.0	8.8	7.4
Sulfation	Abs./1mm	ASTM D7415* >30	12.0	14.1	12.9

OIL ANALYSIS REPORT


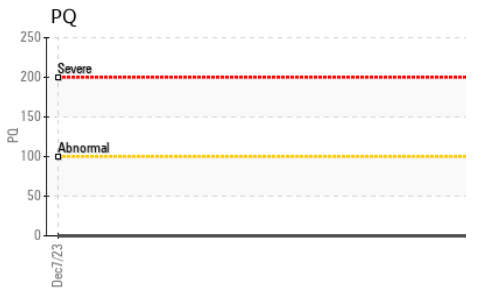
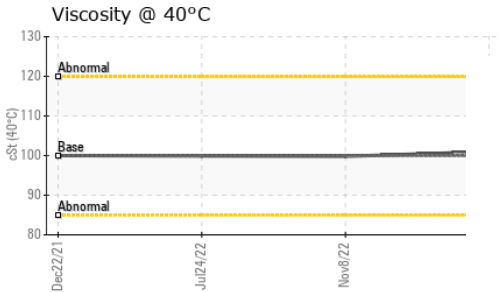
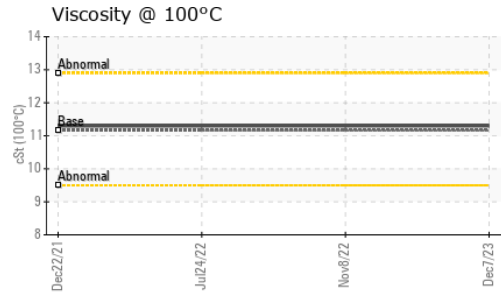
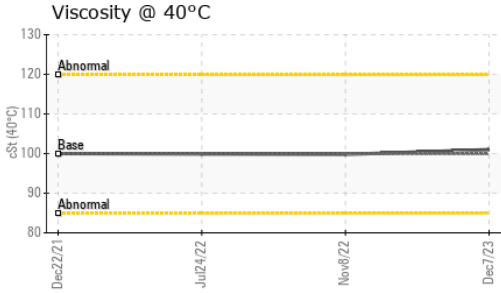


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	5.5	7.3	6.9
Base Number (BN)	mg KOH/g	ASTM D2896*	15.77	15.62	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	99.91	101	99.8	99.9
Visc @ 100°C	cSt	ASTM D7279(m)	11.16	11.3	11.3	11.3
Viscosity Index (VI)	Scale	ASTM D2270*	102	97	98	98

GRAPHS

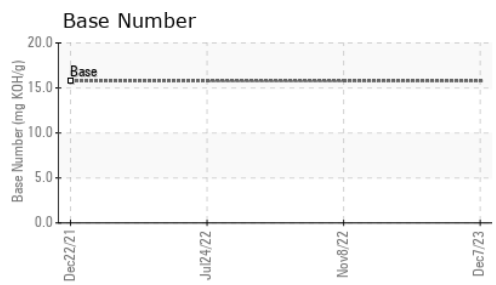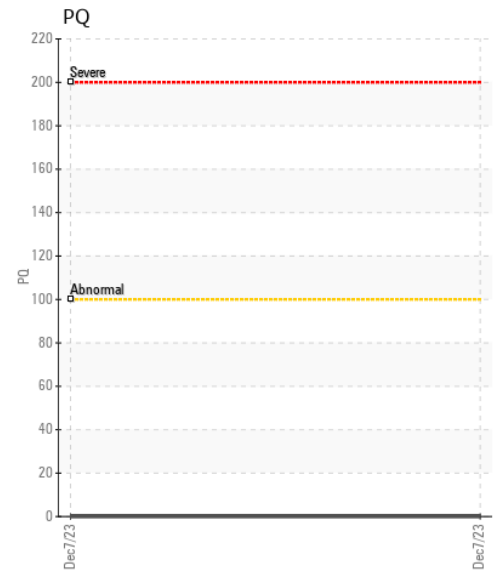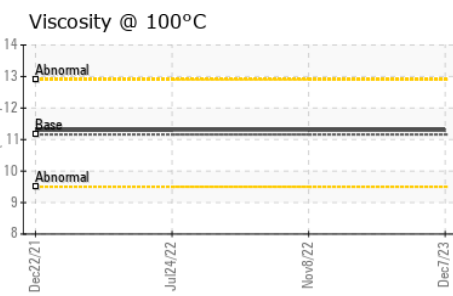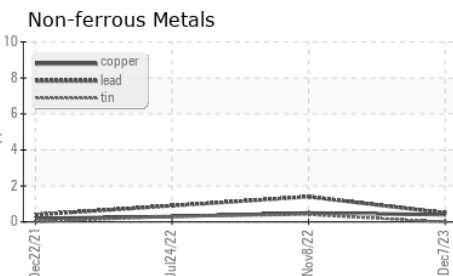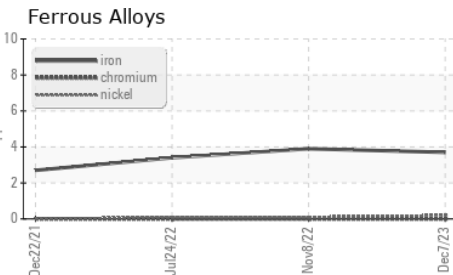

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Ocean Choice International - Katsheshuk II
Sample No. : PC0080307 **Received** : 08 Dec 2023
Lab Number : **02601751** **Diagnosed** : 13 Dec 2023
Unique Number : 5694836 **Diagnostician** : Wes Davis
Test Package : MAR 2 (Additional Tests: KV40, PQ, VI, Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

1315 Topsail Rd, P.O. Box 8190
 St. John's, NL
 CA A1B 3N4
 Contact: Chief Engineer
 katengine@oceanchoice.com

T:
F: