




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

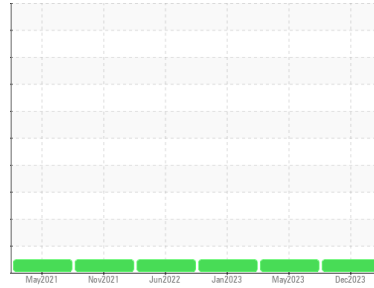

Machine Id
731008
 Component
Natural Gas Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0079587	GFL0079564	GFL0041617
Sample Date	Client Info		07 Dec 2023	29 May 2023	04 Jan 2023
Machine Age	hrs	Client Info	107899	5224	4477
Oil Age	hrs	Client Info	0	0	1200
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >50	10	8	11
Chromium	ppm	ASTM D5185(m) >4	<1	<1	<1
Nickel	ppm	ASTM D5185(m) >2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	0	<1	<1
Silver	ppm	ASTM D5185(m) >3	0	0	0
Aluminum	ppm	ASTM D5185(m) >9	2	2	3
Lead	ppm	ASTM D5185(m) >30	5	<1	2
Copper	ppm	ASTM D5185(m) >35	1	<1	1
Tin	ppm	ASTM D5185(m) >4	<1	<1	<1
Antimony	ppm	ASTM D5185(m)	0	<1	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 50	7	7	6
Barium	ppm	ASTM D5185(m) 5	<1	0	0
Molybdenum	ppm	ASTM D5185(m) 50	56	54	59
Manganese	ppm	ASTM D5185(m) 0	0	<1	<1
Magnesium	ppm	ASTM D5185(m) 560	586	574	702
Calcium	ppm	ASTM D5185(m) 1510	1722	1637	1668
Phosphorus	ppm	ASTM D5185(m) 780	724	745	846
Zinc	ppm	ASTM D5185(m) 870	970	930	1020
Sulfur	ppm	ASTM D5185(m) 2040	2015	2043	2239
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >+100	4	3	4
Sodium	ppm	ASTM D5185(m)	3	5	2
Potassium	ppm	ASTM D5185(m) >20	0	4	0

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	11.5	10.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.0	25.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	22.8	20.2











OIL ANALYSIS REPORT

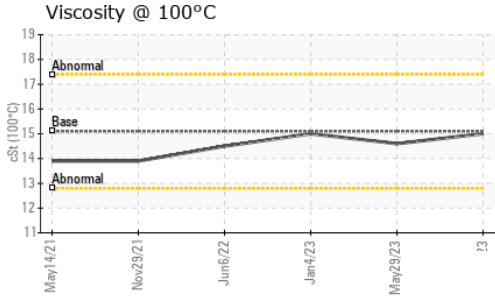

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	15.0	14.6

GRAPHS

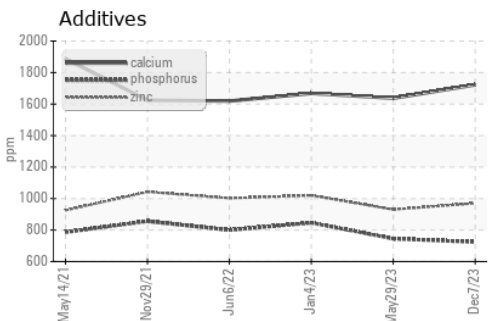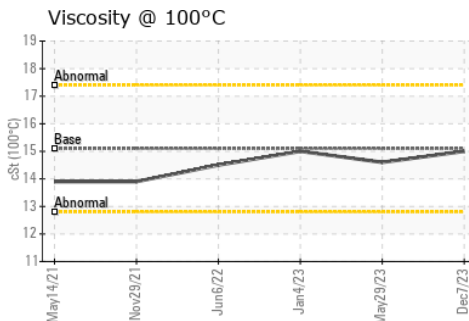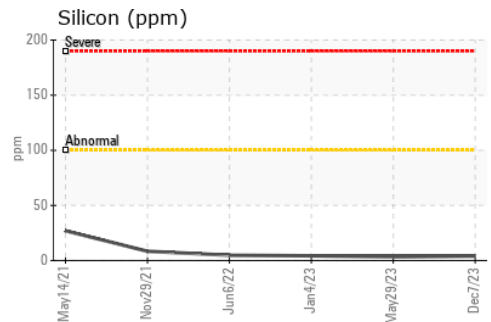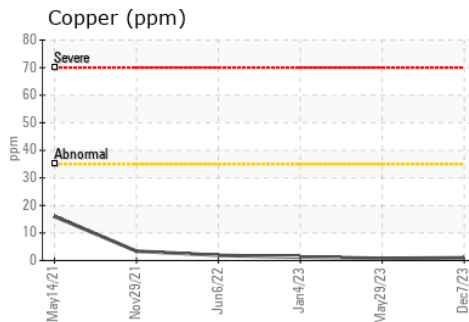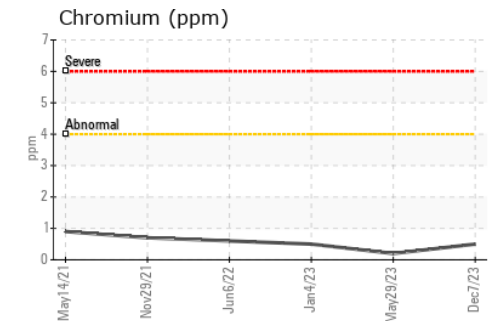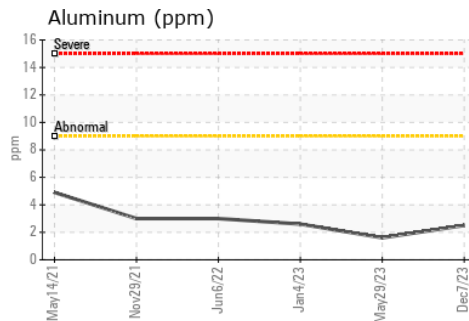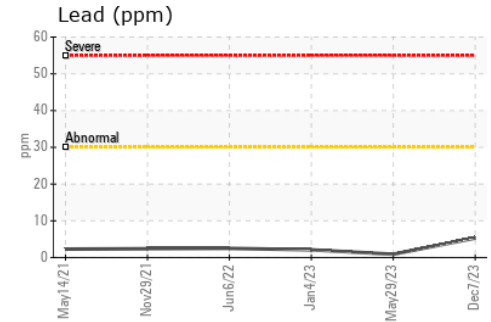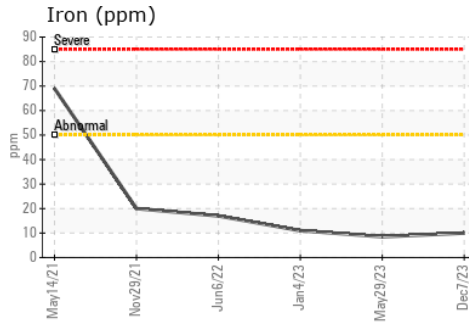

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 277 - Niagara Regional**
Sample No. : GFL0079587 **Received** : 08 Dec 2023 **C/O Metro Truck Niagara Inc., 411 Glendale Avenue**
Lab Number : 02601771 **Diagnosed** : 08 Dec 2023 **St. Catharines, ON**
Unique Number : 5694856 **Diagnostician** : Wes Davis **CA L2P 3Y1**
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Kelly Bremner
 kbremner@gflenv.com
 T: (437)235-6849
 F: