


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

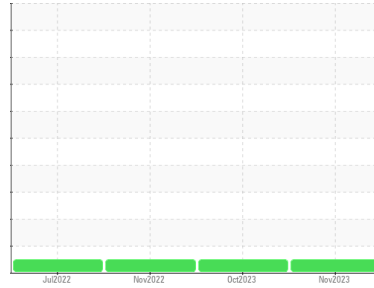

Area
Vessel
Machine Id
KAT 016 (STARTING AIR COMPRESSOR #2)
Component
2 Compressor
Fluid
SHELL CORENA S4 P 100 (40 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The water content is negligible. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0080269	PC0018591	PC0031771
Sample Date	Client Info			22 Nov 2023	18 Oct 2023	08 Nov 2022
Machine Age	hrs	Client Info		21886	21226	21226
Oil Age	hrs	Client Info		21886	21226	21226
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL






WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m)	>50	5	18	17
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)		<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)		<1	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>65	<1	1	2
Copper	ppm	ASTM D5185(m)	>65	2	7	14
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1	<1	<1
Barium	ppm	ASTM D5185(m)		<1	<1	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)		0	0	<1
Calcium	ppm	ASTM D5185(m)		3	2	2
Phosphorus	ppm	ASTM D5185(m)		86	45	54
Zinc	ppm	ASTM D5185(m)		4	8	15
Sulfur	ppm	ASTM D5185(m)		7	20	36
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>35	0	<1	<1
Sodium	ppm	ASTM D5185(m)		1	2	2
Potassium	ppm	ASTM D5185(m)	>20	3	<1	<1
Water	%	ASTM D6304*	>0.1	0.036	---	---
ppm Water	ppm	ASTM D6304*	>1000	370	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.27	---	---


OIL ANALYSIS REPORT

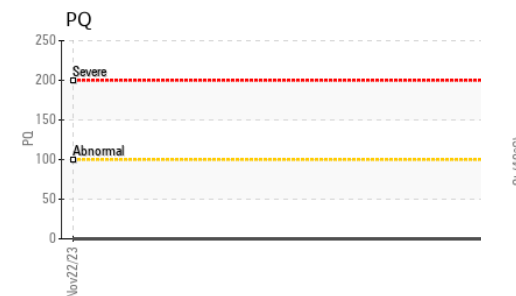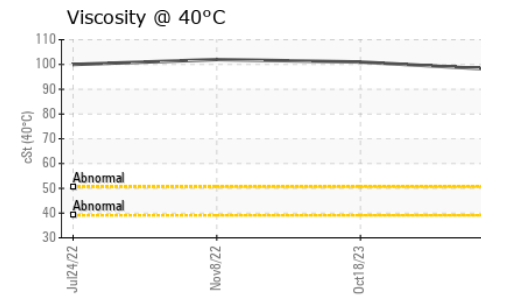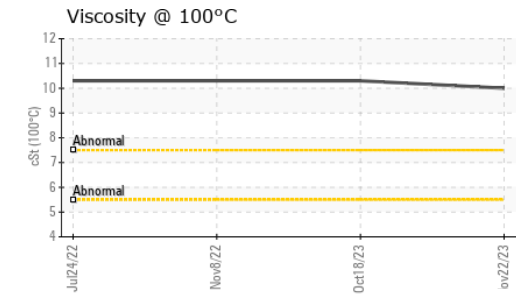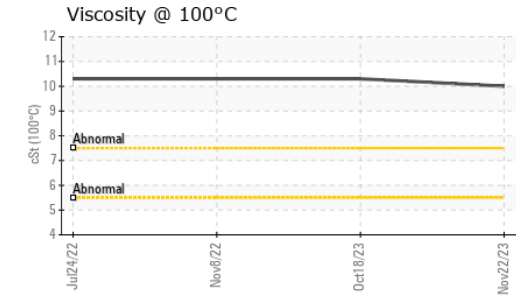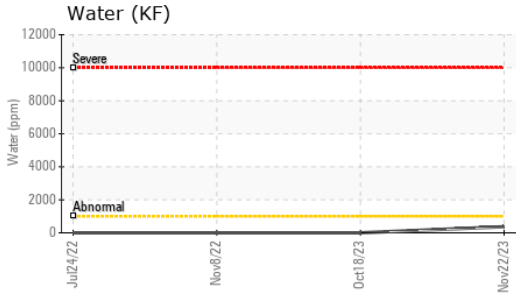






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	97.8	101	102
Visc @ 100°C	cSt	ASTM D7279(m)	10.0	10.3	10.3
Viscosity Index (VI)	Scale	ASTM D2270*	76	78	77

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

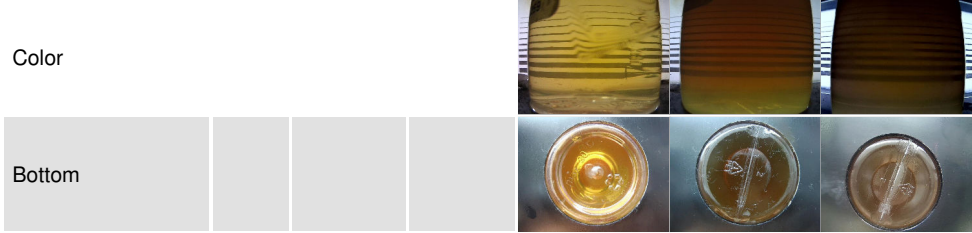

GRAPHS

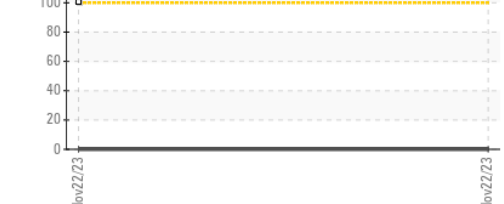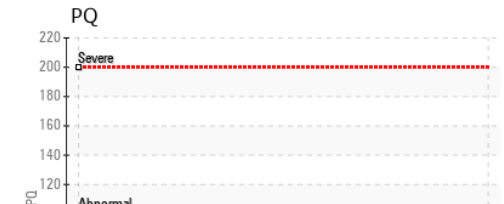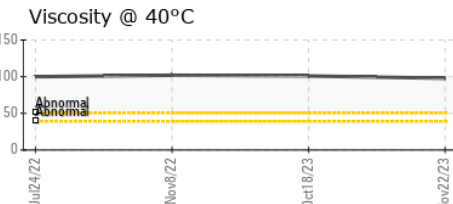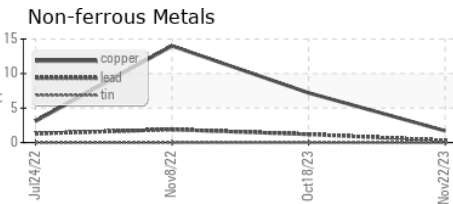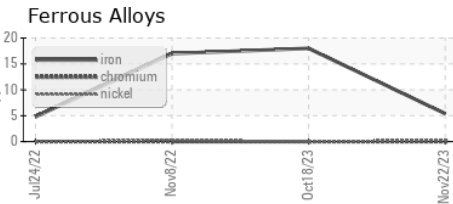

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Ocean Choice International - Katsheshuk II
Sample No. : PC0080269 **Received** : 08 Dec 2023
Lab Number : 02601877 **Diagnosed** : 11 Dec 2023
Unique Number : 5694962 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: KF, KV100, VI)
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

1715 Topsail Rd, P.O. Box 8190
 St. John's, NL
 CA A1B 3N4
 Contact: Chief Engineer
 katengine@oceanchoice.com
 T:
 F: