

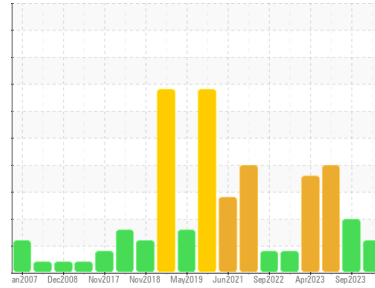
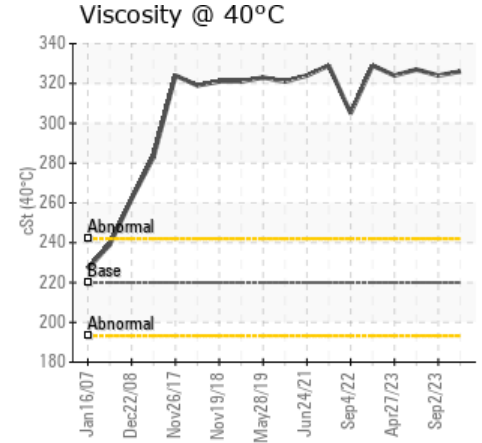


Area  
**1440**  
Machine Id  
**1440-5512-4003 - COPPER REGRIND MILL**  
Component  
**Drive End Gear Reducer**  
Fluid  
**PETRO CANADA ENDURATEX EP 220 (55 GAL)**

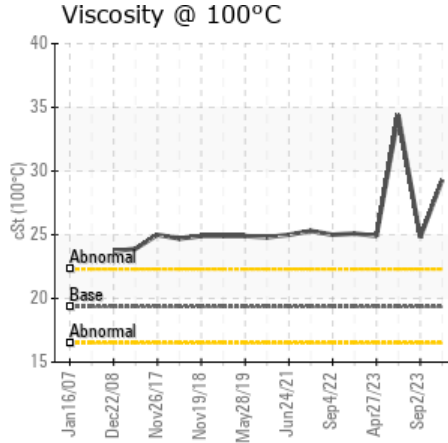

**COMPONENT CONDITION SUMMARY**

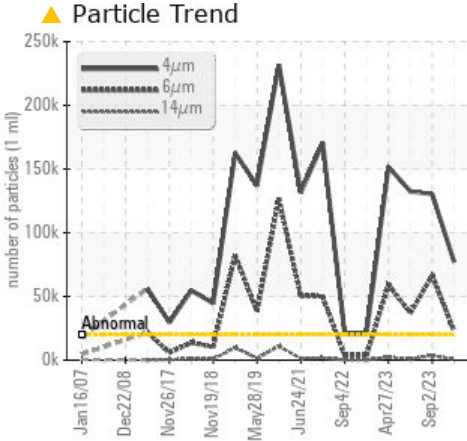

**RECOMMENDATION**

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

**PROBLEMATIC TEST RESULTS**

Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>20000	<b>▲ 77124</b>	▲ 130219	▲ 132472
Particles >6µm	ASTM D7647	>5000	<b>▲ 22745</b>	▲ 66632	▲ 37071
Oil Cleanliness	ISO 4406 (c)	>21/19/16	<b>▲ 23/22/16</b>	▲ 24/23/19	▲ 24/22/17

Customer Id: INCVOS  
Sample No.: PC0070732  
Lab Number: 02602037  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.

## HISTORICAL DIAGNOSIS

### 02 Sep 2023 Diag: Bill Quesnel

ISO



We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of particulates (2 to 100 microns in size) present in the oil. Viscosity of sample indicates oil is within ISO 320 range, advise investigate. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



### 20 Jun 2023 Diag: Kevin Marson

WATER



We advise that you check for the source of water entry. Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We advise that you use off-line filtration with water adsorbent filters to attempt to remove the water from this oil. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. There is a moderate concentration of water present in the oil. Viscosity of sample indicates oil is within ISO 320 range, advise investigate. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



### 27 Apr 2023 Diag: Kevin Marson

ISO




Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. Viscosity of sample indicates oil is within ISO 320 range, advise investigate. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



Area  
**1440**  
Machine Id  
**1440-5512-4003 - COPPER REGRIND MILL**  
Component  
**Drive End Gear Reducer**  
Fluid  
**PETRO CANADA ENDURATEX EP 220 (55 GAL)**

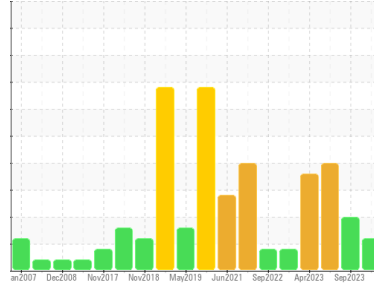

**DIAGNOSIS**

**Recommendation**

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

**Wear**

All component wear rates are normal.

**Contamination**

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

**Fluid Condition**

Viscosity of sample indicates oil is within ISO 320 range, advise investigate. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

**SAMPLE INFORMATION**

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PC0070732</b>	PC0070133	PC0040489
Sample Date	Client Info	<b>30 Nov 2023</b>	02 Sep 2023	20 Jun 2023
Machine Age	yrs	Client Info	0	0
Oil Age	yrs	Client Info	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

**CONTAMINATION**

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

**WEAR METALS**

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >150	<b>20</b>	4	39
Chromium	ppm	ASTM D5185(m) >10	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m) >100	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185(m) >50	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185(m) >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m) >5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

**ADDITIVES**

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 60	<b>41</b>	60	52
Barium	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m) 0	<b>0</b>	<1	<1
Calcium	ppm	ASTM D5185(m) 0	<b>2</b>	2	4
Phosphorus	ppm	ASTM D5185(m) 270	<b>228</b>	257	259
Zinc	ppm	ASTM D5185(m) 0	<b>8</b>	6	6
Sulfur	ppm	ASTM D5185(m) 11200	<b>5520</b>	5645	5811
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1






**CONTAMINANTS**

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >50	<b>4</b>	7	8
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	1
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	<1	2

**FLUID CLEANLINESS**

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >20000	<b>▲ 77124</b>	▲ 130219	▲ 132472
Particles >6µm	ASTM D7647 >5000	<b>▲ 22745</b>	▲ 66632	▲ 37071
Particles >14µm	ASTM D7647 >640	<b>578</b>	▲ 3505	▲ 1016
Particles >21µm	ASTM D7647 >160	<b>57</b>	▲ 483	82
Particles >38µm	ASTM D7647 >40	<b>6</b>	15	2
Particles >71µm	ASTM D7647 >10	<b>4</b>	9	0
Oil Cleanliness	ISO 4406 (c) >21/19/16	<b>▲ 23/22/16</b>	▲ 24/23/19	▲ 24/22/17

# OIL ANALYSIS REPORT

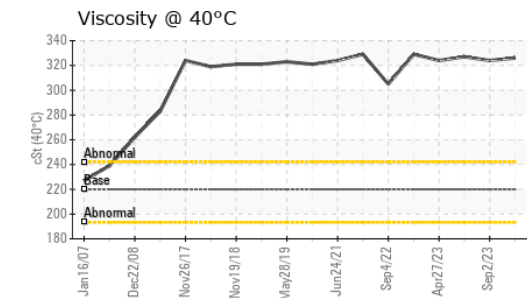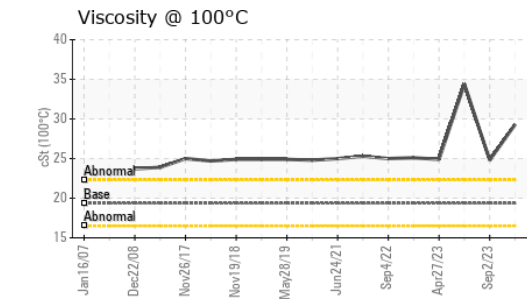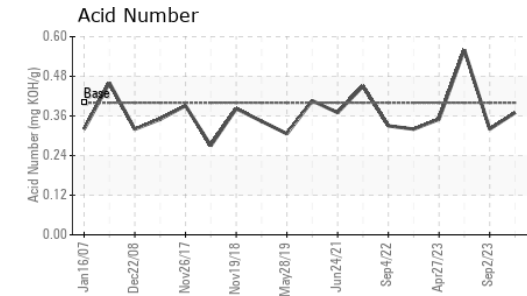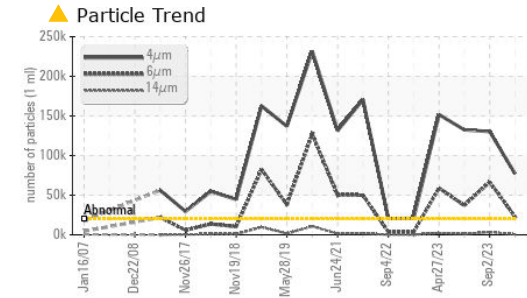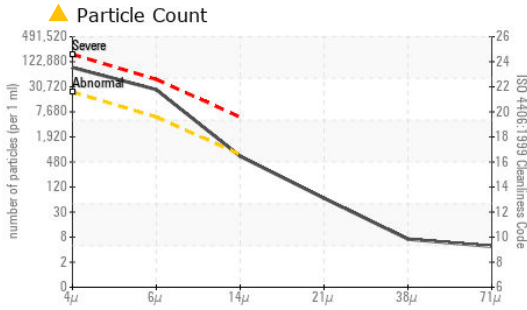

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0070732  
**Lab Number** : **02602037**  
**Unique Number** : 5695122  
**Test Package** : IND 2 ( Additional Tests: KV100, TAN Man, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**Vale - Voisey's Bay**  
 Voisey's Bay Mine Site, P.O. Box 7001, Str. C Happy Valley  
 Goose Bay, NL  
 CA A0P 1C0  
 Contact: Robert Feltham  
 robert.feltham@vale.com

T:  
F: x:

FLUID DEGRADATION						
	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.40	<b>0.37</b>	0.32	0.56
VISUAL						
	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	▲ MILKY
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	▲ .2%
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES						
	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	220	<b>326</b>	324	327
Visc @ 100°C	cSt	ASTM D7279(m)	19.35	<b>29.3</b>	24.8	34.4
Viscosity Index (VI)	Scale	ASTM D2270*	99	<b>122</b>	98	148

SAMPLE IMAGES						
	method	limit/base	current	history1	history2	
Color						
Bottom						