



Machine Id


P-17

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

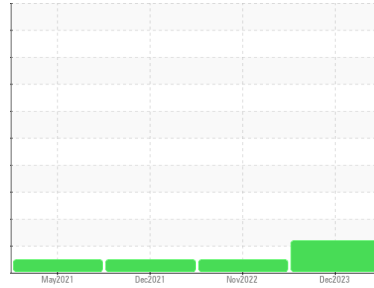

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0078496	PC0050426	PC0050493
Sample Date	Client Info		06 Dec 2023	29 Nov 2022	08 Dec 2021
Machine Age	kms	Client Info	204945	199431	194654
Oil Age	kms	Client Info	7000	5000	6640
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	40	22	43
Chromium	ppm	ASTM D5185(m) >20	2	<1	2
Nickel	ppm	ASTM D5185(m) >4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	0	<1	0
Silver	ppm	ASTM D5185(m) >3	0	0	0
Aluminum	ppm	ASTM D5185(m) >20	3	2	3
Lead	ppm	ASTM D5185(m) >40	7	2	3
Copper	ppm	ASTM D5185(m) >330	2	<1	1
Tin	ppm	ASTM D5185(m) >15	<1	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 250	<1	<1	<1
Barium	ppm	ASTM D5185(m) 10	<1	0	0
Molybdenum	ppm	ASTM D5185(m) 100	60	57	58
Manganese	ppm	ASTM D5185(m)	0	<1	<1
Magnesium	ppm	ASTM D5185(m) 450	933	933	979
Calcium	ppm	ASTM D5185(m) 3000	993	1025	988
Phosphorus	ppm	ASTM D5185(m) 1150	917	1061	1035
Zinc	ppm	ASTM D5185(m) 1350	1116	1135	1191
Sulfur	ppm	ASTM D5185(m) 4250	2486	2599	2592
Lithium	ppm	ASTM D5185(m)	<1	<1	<1




CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	3	3	4
Sodium	ppm	ASTM D5185(m) >158	2	<1	2
Potassium	ppm	ASTM D5185(m) >20	0	<1	<1
Fuel	%	ASTM D7593* >5	▲ 4.2	<1.0	<1.0

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	1.6	0.6	1
Nitration	Abs/cm	ASTM D7624* >20	9.9	7.2	8.6
Sulfation	Abs/.1mm	ASTM D7415* >30	23.2	20.9	21.6

OIL ANALYSIS REPORT






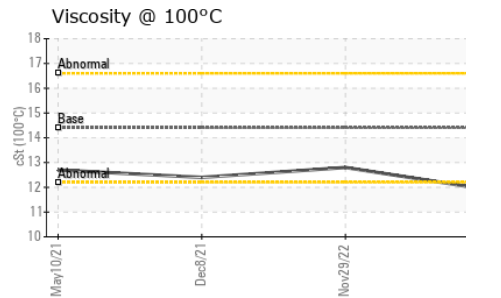
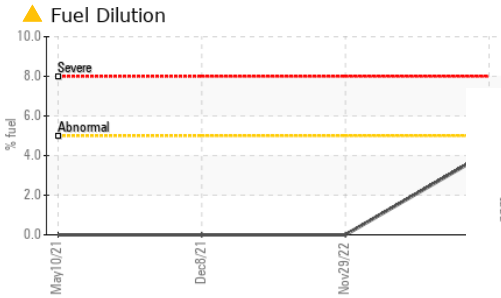
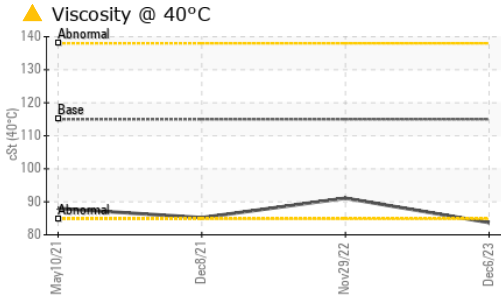


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	18.0	15.4	15.5

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	115	▲ 83.7	91.1	85.2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	11.9	12.8	12.4
Viscosity Index (VI)	Scale	ASTM D2270*	126	135	137	141

GRAPHS

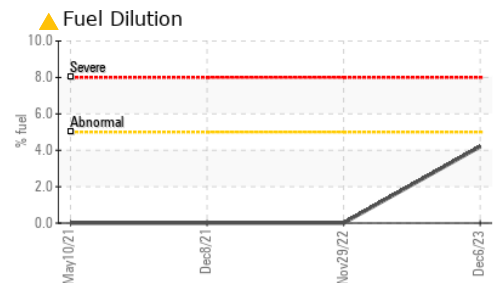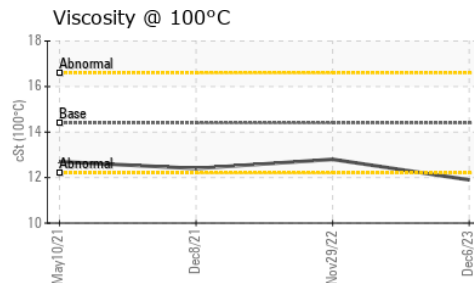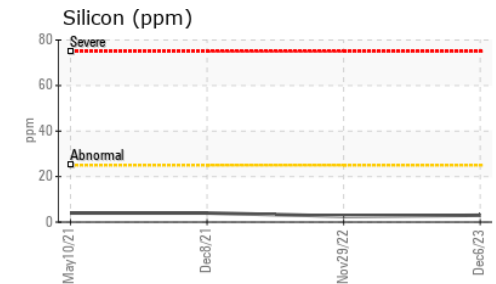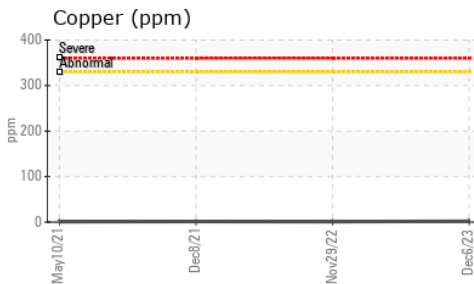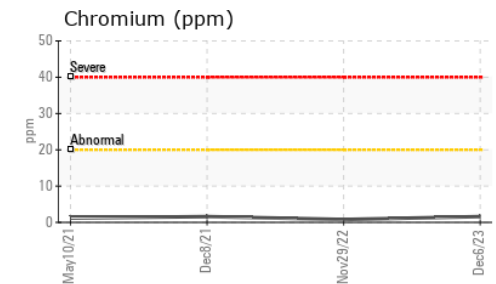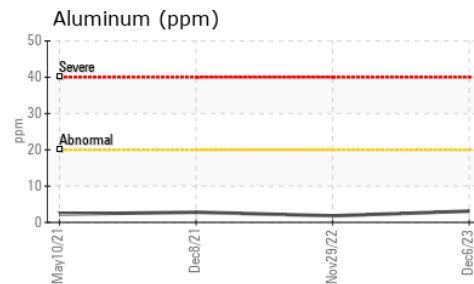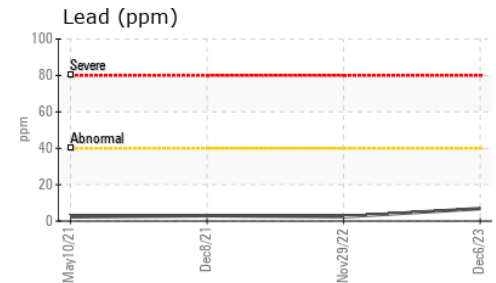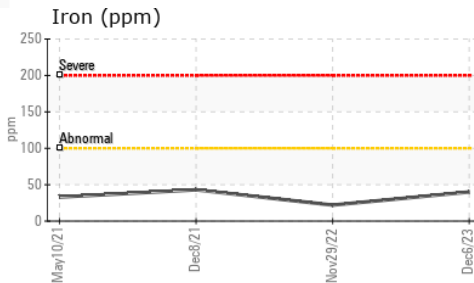

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0078496
Lab Number : 02602776
Unique Number : 5695861
Test Package : MOB 1 (Additional Tests: FuelDilution, KV40, PercentFuel, VI)

HAMILTON FIRE DEPT
 MECHANICAL DIV., 177 BAY STREET NORTH
 HAMILTON, ON
 CA L8R 2P8
 Contact: Jenny-Lynn Pellegrino
 jenny-lynn.pellegrino@hamilton.ca
 T: (905)546-2424
 F: (905)961-9116

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*