

Machine Id  
**SPARTAN R112/25032**  
Component  
**Front Diesel Engine**  
Fluid  
**CASTROL HYPURON 15W40 (24 LTR)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0075224</b>	PC0056534	AP104350
Sample Date	Client Info			<b>26 Sep 2023</b>	14 Nov 2022	04 Apr 2017
Machine Age	kms	Client Info		<b>0</b>	230739	123268
Oil Age	kms	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>75	<b>37</b>	43	21
Chromium	ppm	ASTM D5185(m)	>5	<b>1</b>	3	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>15	<b>2</b>	4	4
Lead	ppm	ASTM D5185(m)	>25	<b>2</b>	3	2
Copper	ppm	ASTM D5185(m)	>100	<b>5</b>	6	4
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	2
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>5</b>	26	31
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)		<b>64</b>	60	2
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>995</b>	1023	11
Calcium	ppm	ASTM D5185(m)		<b>1095</b>	997	2552
Phosphorus	ppm	ASTM D5185(m)		<b>997</b>	1043	1051
Zinc	ppm	ASTM D5185(m)		<b>1218</b>	1180	1279
Sulfur	ppm	ASTM D5185(m)		<b>2440</b>	2664	3523
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>8</b>	5	7
Sodium	ppm	ASTM D5185(m)		<b>21</b>	20	6
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	2	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0.7</b>	0.6	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.0</b>	12.7	10.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>25.1</b>	27.2	26.2

# OIL ANALYSIS REPORT







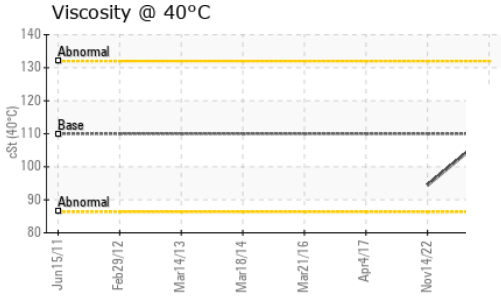
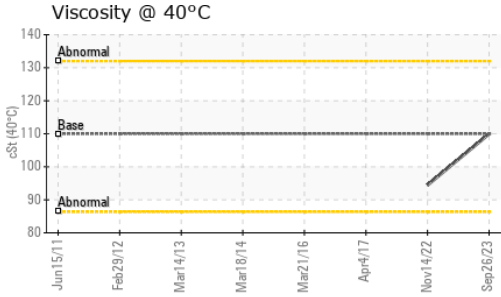


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>23.7</b>	27.8	21.4

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	110	<b>110</b>	94.5	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	<b>14.8</b>	13.3	15.1
Viscosity Index (VI)	Scale	ASTM D2270*	140	<b>139</b>	140	---

## GRAPHS

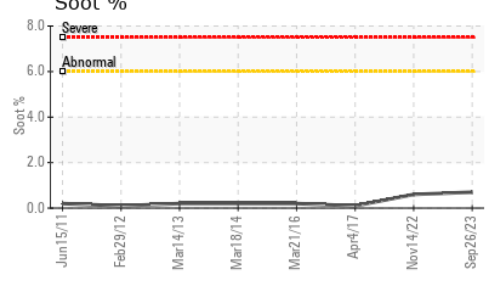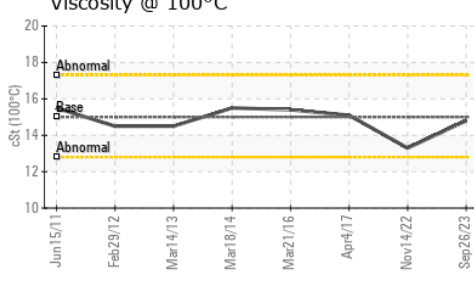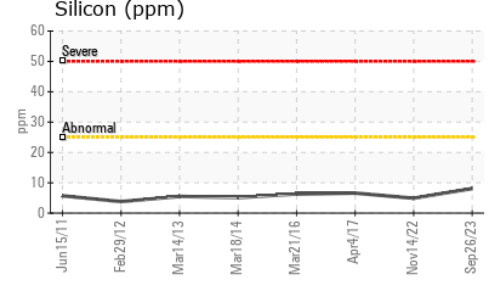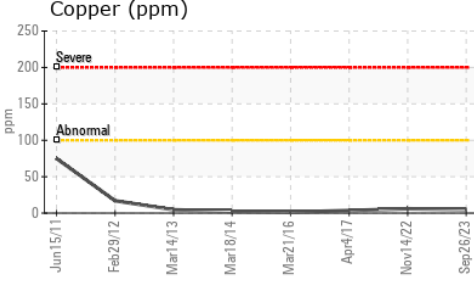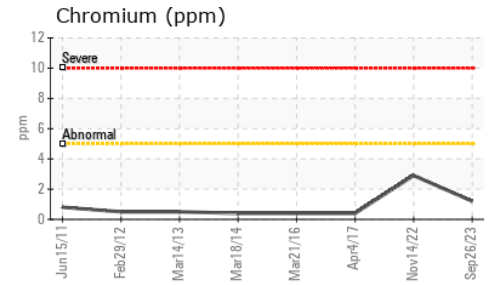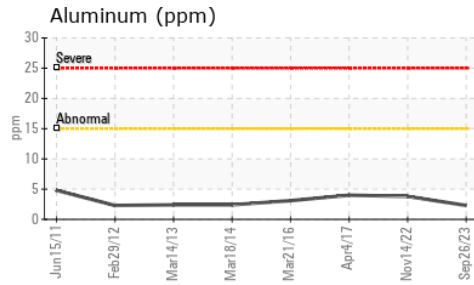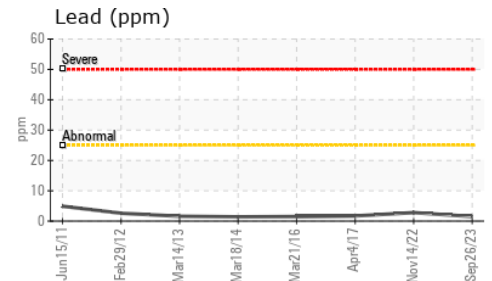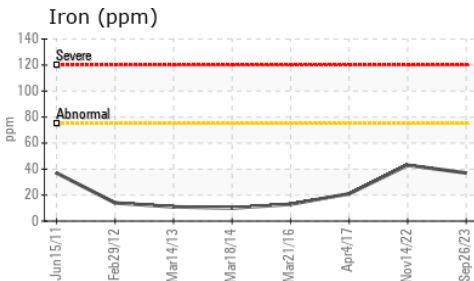

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0075224 **Received** : 15 Dec 2023  
**Lab Number** : **02603435** **Diagnosed** : 15 Dec 2023  
**Unique Number** : 5696520 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

**TORONTO FIRE SERVICES**  
 40 TORYORK DRIVE  
 TORONTO, ON  
 CA M9L 1X6  
 Contact: Antonio Rodrigues  
 antonio.rodrigues@toronto.ca  
 T:  
 F: (416)338-9207

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.