




OIL ANALYSIS REPORT

Sample Rating Trend

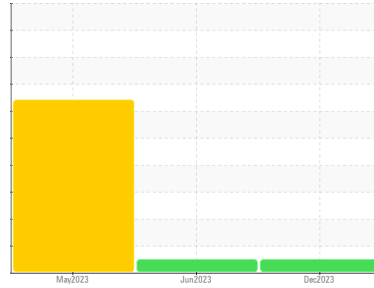

NORMAL



Machine Id
412029
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (34 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0094385	GFL0055421	GFL0063927
Sample Date	Client Info		15 Dec 2023	02 Jun 2023	29 May 2023
Machine Age	hrs	Client Info	2751	1620	0
Oil Age	hrs	Client Info	2751	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	0.8
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	13	9	70
Chromium	ppm	ASTM D5185(m)	>20	<1	0	<1
Nickel	ppm	ASTM D5185(m)	>5	2	<1	10
Titanium	ppm	ASTM D5185(m)	>2	0	0	<1
Silver	ppm	ASTM D5185(m)	>2	<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	5	2	9
Lead	ppm	ASTM D5185(m)	>40	2	1	7
Copper	ppm	ASTM D5185(m)	>330	21	25	127
Tin	ppm	ASTM D5185(m)	>15	<1	<1	7
Antimony	ppm	ASTM D5185(m)		0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	6	12	10
Barium	ppm	ASTM D5185(m)	0	<1	0	0
Molybdenum	ppm	ASTM D5185(m)	60	61	58	43
Manganese	ppm	ASTM D5185(m)	0	0	<1	5
Magnesium	ppm	ASTM D5185(m)	1010	954	886	539
Calcium	ppm	ASTM D5185(m)	1070	1110	1123	1624
Phosphorus	ppm	ASTM D5185(m)	1150	987	1031	906
Zinc	ppm	ASTM D5185(m)	1270	1167	1114	1083
Sulfur	ppm	ASTM D5185(m)	2060	2566	2583	2139
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	3	4	17
Sodium	ppm	ASTM D5185(m)		2	1	4
Potassium	ppm	ASTM D5185(m)	>20	9	4	31

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	0.2	0	0.3
Nitration	Abs/cm	ASTM D7624*	>20	8.4	5.4	11.9
Sulfation	Abs./1mm	ASTM D7415*	>30	18.9	18.3	24.7



OIL ANALYSIS REPORT

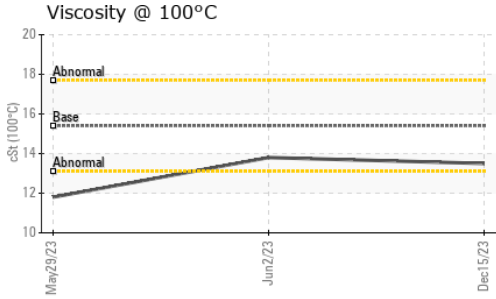

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	14.9	13.6	23.4









VISUAL

	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES

	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.5	13.8	▲ 11.8

GRAPHS

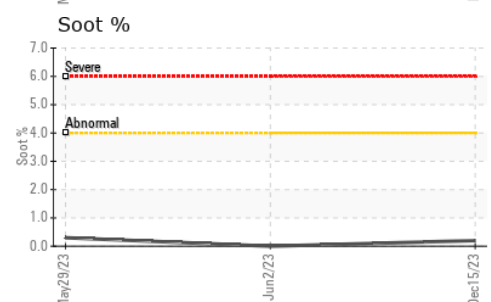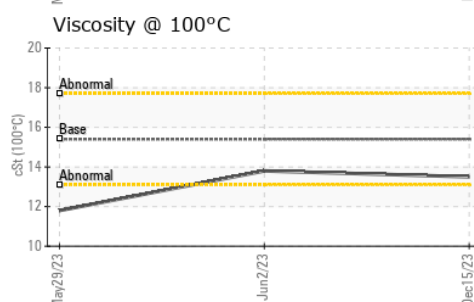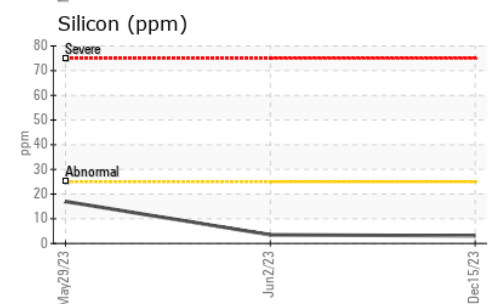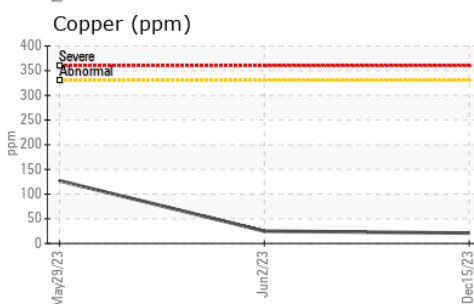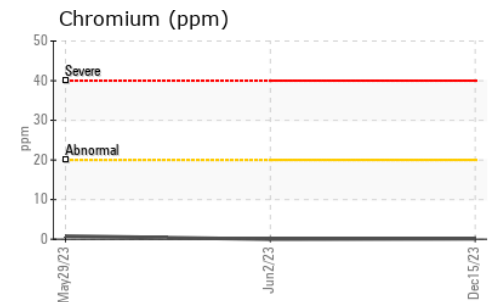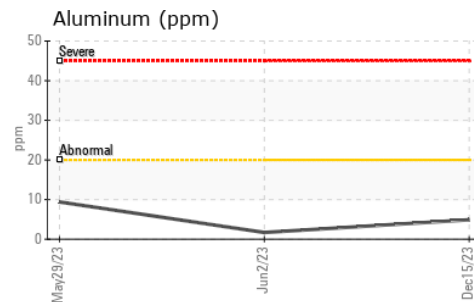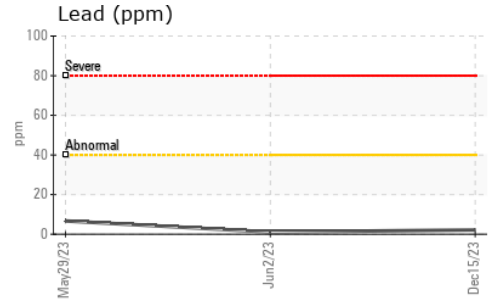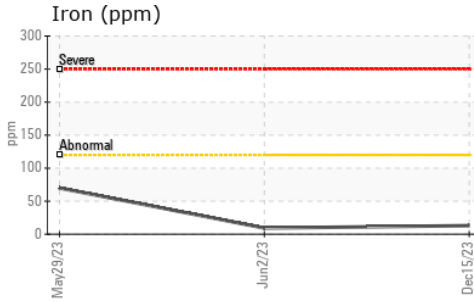

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0094385
Lab Number : 02604044
Unique Number : 5697129
Test Package : MOB 1

GFL Environmental - 222 - Sandhill
 SANDHILL DISPOSAL & RECYCLING DIVIS, 19 COMMERCE ROAD
 ORANGEVILLE, ON
 CA L9W 3X5
 Contact: GLENN COOK
 gcook@gflenv.com
 T: (519)940-4167
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.