




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

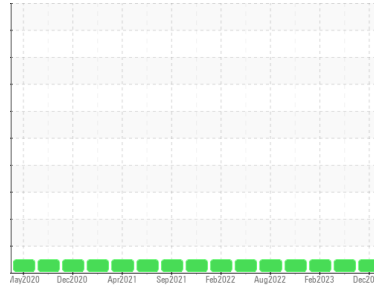

Machine Id
401153
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0094384	GFL0086769	GFL0063923
Sample Date	Client Info		15 Dec 2023	01 Sep 2023	03 Feb 2023
Machine Age	hrs	Client Info	11016	7717	7717
Oil Age	hrs	Client Info	11016	7717	7717
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	6	5	7
Chromium	ppm	ASTM D5185(m) >20	0	<1	<1
Nickel	ppm	ASTM D5185(m) >5	0	0	<1
Titanium	ppm	ASTM D5185(m) >2	0	0	<1
Silver	ppm	ASTM D5185(m) >2	<1	<1	0
Aluminum	ppm	ASTM D5185(m) >20	2	1	2
Lead	ppm	ASTM D5185(m) >40	<1	<1	0
Copper	ppm	ASTM D5185(m) >330	1	1	<1
Tin	ppm	ASTM D5185(m) >15	0	0	<1
Antimony	ppm	ASTM D5185(m)	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	7	6	2
Barium	ppm	ASTM D5185(m) 0	<1	0	0
Molybdenum	ppm	ASTM D5185(m) 60	62	59	59
Manganese	ppm	ASTM D5185(m) 0	0	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	968	953	976
Calcium	ppm	ASTM D5185(m) 1070	1128	1050	1101
Phosphorus	ppm	ASTM D5185(m) 1150	987	1025	1075
Zinc	ppm	ASTM D5185(m) 1270	1202	1144	1194
Sulfur	ppm	ASTM D5185(m) 2060	2484	2411	2581
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	2	3	4
Sodium	ppm	ASTM D5185(m)	2	2	2
Potassium	ppm	ASTM D5185(m) >20	<1	1	<1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	0.2	0.1	0
Nitration	Abs/cm	ASTM D7624* >20	8.9	6.9	8.1
Sulfation	Abs./1mm	ASTM D7415* >30	18.7	19.3	20.4



OIL ANALYSIS REPORT








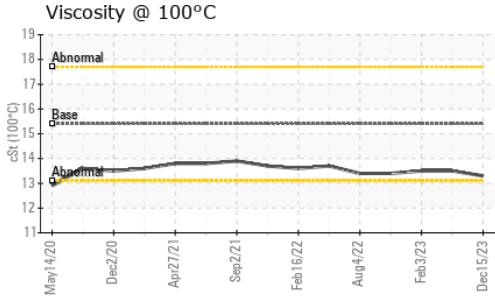


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	15.6	13.2	15.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.3	13.5	13.5

GRAPHS

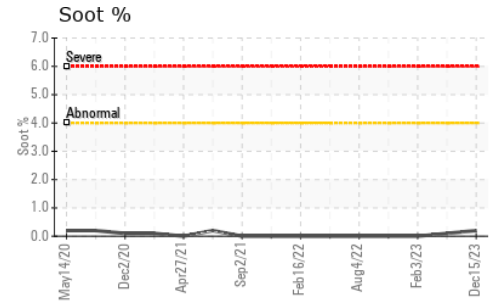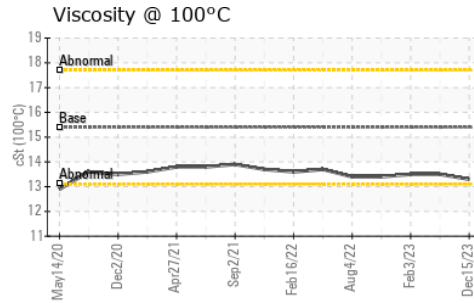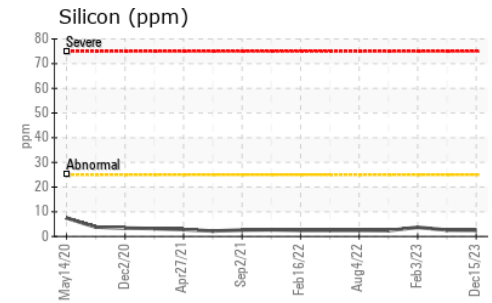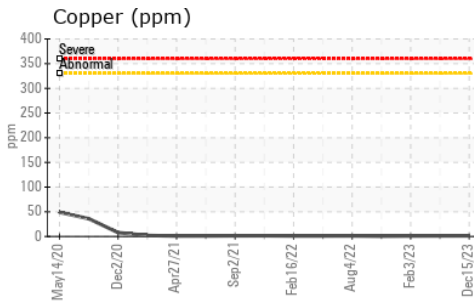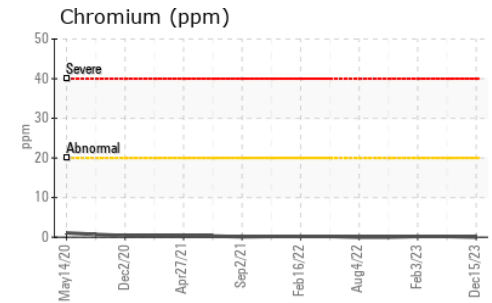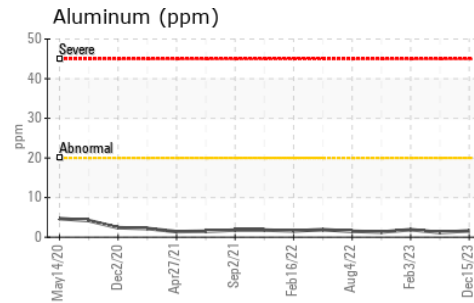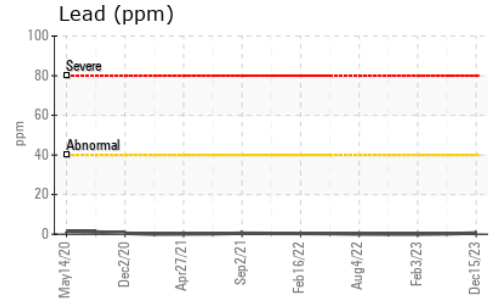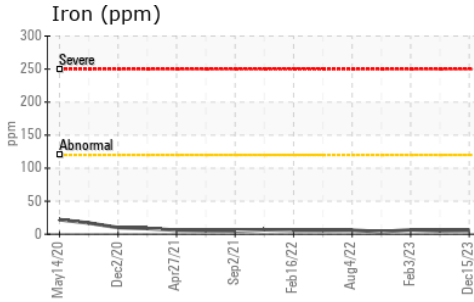

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 222 - Sandhill**
Sample No. : GFL0094384 **Received** : 19 Dec 2023 **SANDHILL DISPOSAL & RECYCLING DIVIS, 19 COMMERCIAL ROAD**
Lab Number : **02604045** **Diagnosed** : 19 Dec 2023 **ORANGEVILLE, ON**
Unique Number : 5697130 **Diagnostician** : Wes Davis **CA L9W 3X5**
Test Package : MOB 1 **Contact:** GLENN COOK

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

gcook@gflenv.com
T: (519)940-4167
F: