

OIL ANALYSIS REPORT

Sample Rating Trend

OFF SPEC



Machine Id
FLUIDA MIXTURE 4

Component
New (Unused) Oil

Fluid
50% HYDREX MV 46 50% AFD AWARD HD 46 (--- GAL)

DIAGNOSIS

▲ Recommendation

This is a baseline read-out on the submitted sample.

Wear

{not applicable}

Contamination

{not applicable}

▲ Fluid Condition

Foaming Tendency Stage 1 is abnormally high.
Foaming Tendency Stage 3 is abnormally high.
Foam Tendency is abnormally high.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC	---	---
Sample Date	Client Info		18 Dec 2023	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	0	---	---
Chromium	ppm	ASTM D5185(m)	0	---	---
Nickel	ppm	ASTM D5185(m)	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	<1	---	---
Aluminum	ppm	ASTM D5185(m)	0	---	---
Lead	ppm	ASTM D5185(m)	<1	---	---
Copper	ppm	ASTM D5185(m)	<1	---	---
Tin	ppm	ASTM D5185(m)	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---




ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<1	---	---
Barium	ppm	ASTM D5185(m)	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	0	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m)	0	---	---
Calcium	ppm	ASTM D5185(m)	1	---	---
Phosphorus	ppm	ASTM D5185(m)	337	---	---
Zinc	ppm	ASTM D5185(m)	2	---	---
Sulfur	ppm	ASTM D5185(m)	851	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	0	---	---
Sodium	ppm	ASTM D5185(m)	0	---	---
Potassium	ppm	ASTM D5185(m) >20	0	---	---

OIL ANALYSIS REPORT

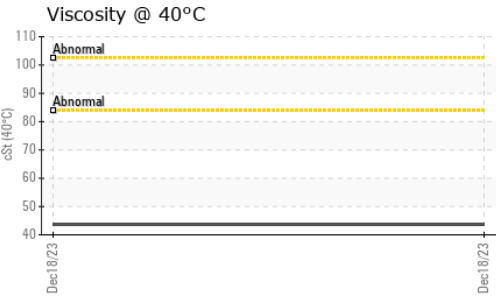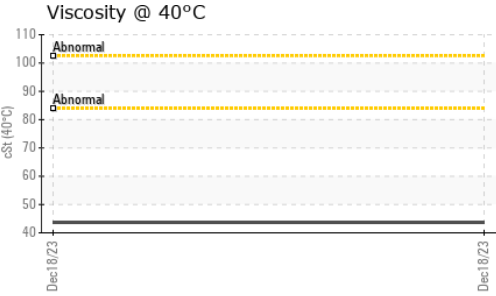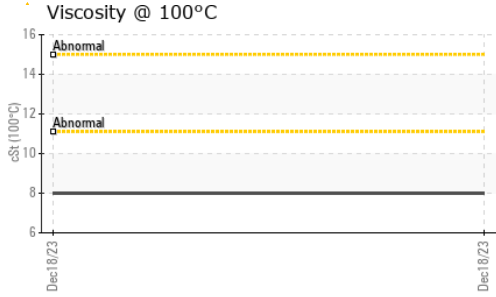


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	NEG	---	---	
Free Water	scalar	Visual*	NEG	---	---	

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	43.7	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	8	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	157	---	---
Separability	oil/h2o/em	ASTM D1401*	41/39/0 (10)	---	---
Foam Tendency	I/II/III	ASTM D892*	▲ 470/40/500	---	---
Foam Stability	I/II/III	ASTM D892*	0/0/0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

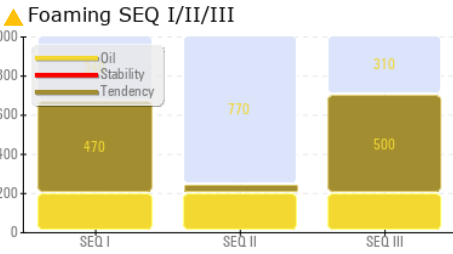

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Petro-Canada Technical/Peter Harteveid
Sample No. : PC **Recieved** : 19 Dec 2023
Lab Number : 02604299 **Diagnosed** : 04 Jan 2024
Unique Number : 5697384 **Diagnostician** : Bill Quesnel
Test Package : TEST (Additional Tests: Foaming, H2OSeparability, ICP, KV100, KV40, Spat, VI) **Contact:** Peter Harteveid

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Mississauga, ON
 CA L5J 1K2
 T: (780)967-4234
 F: (780)967-4414