




# OIL ANALYSIS REPORT

Sample Rating Trend

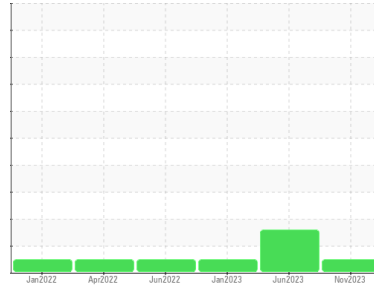

**NORMAL**



Machine Id

**1142**

Component

**Diesel Engine**

Fluid

**PETRO CANADA 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0090758</b>	GFL0069691	GFL0069695
Sample Date	Client Info		<b>29 Nov 2023</b>	13 Jun 2023	12 Jan 2023
Machine Age	hrs	Client Info	<b>21998</b>	21300	20862
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>165	<b>39</b>	29	30
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>3</b>	2	2
Lead	ppm	ASTM D5185(m)	>150	<b>4</b>	2	6
Copper	ppm	ASTM D5185(m)	>90	<b>2</b>	2	1
Tin	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>1</b>	2	2
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>68</b>	63	65
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>1086</b>	1053	1068
Calcium	ppm	ASTM D5185(m)		<b>1174</b>	1111	1220
Phosphorus	ppm	ASTM D5185(m)		<b>1107</b>	1122	1169
Zinc	ppm	ASTM D5185(m)		<b>1313</b>	1263	1329
Sulfur	ppm	ASTM D5185(m)		<b>2663</b>	2620	2579
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>35	<b>15</b>	▲ 37	8
Sodium	ppm	ASTM D5185(m)		<b>13</b>	6	3
Potassium	ppm	ASTM D5185(m)	>20	<b>8</b>	1	2

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>7.5	<b>1.1</b>	0.5	0.8
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.8</b>	9.5	11.5
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>23.7</b>	21.7	24.7



# OIL ANALYSIS REPORT

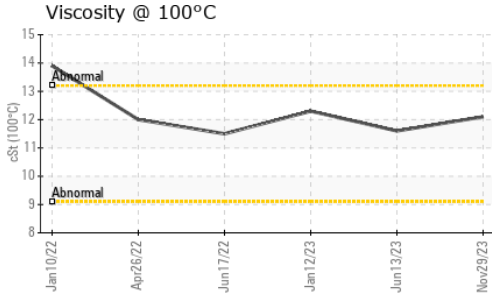

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Abs./1mm	ASTM D7414*	>25	16.5	20.0









## VISUAL

method	limit/base	current	history1	history2
scalar	Visual*	>0.2	NEG	NEG
scalar	Visual*	NEG	NEG	NEG

## FLUID PROPERTIES

method	limit/base	current	history1	history2
cSt	ASTM D7279(m)	12.1	11.6	12.3

## GRAPHS

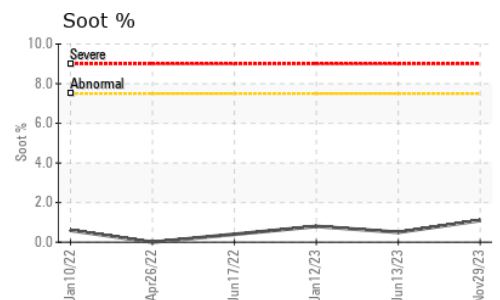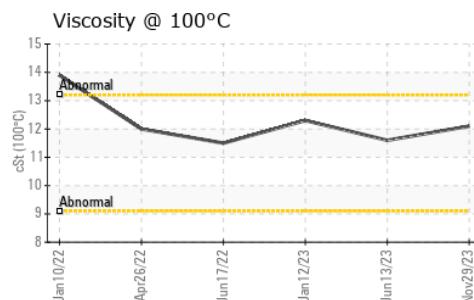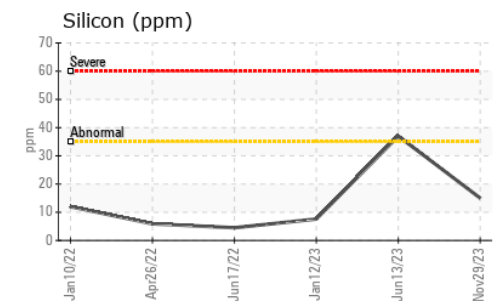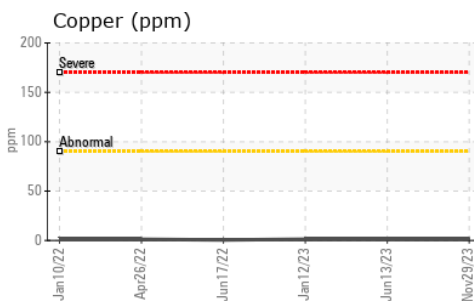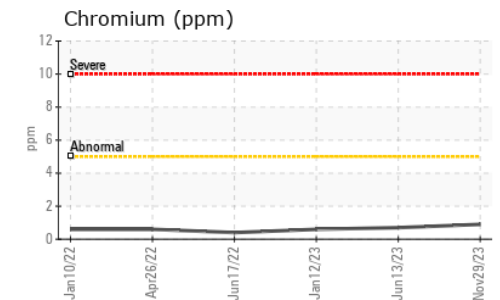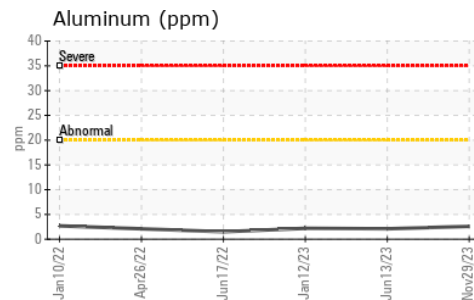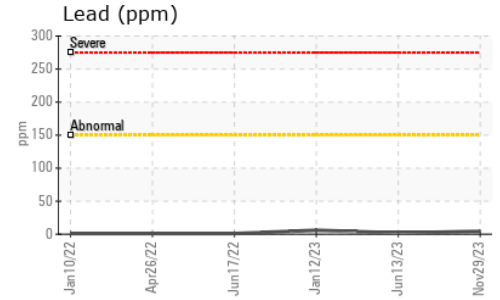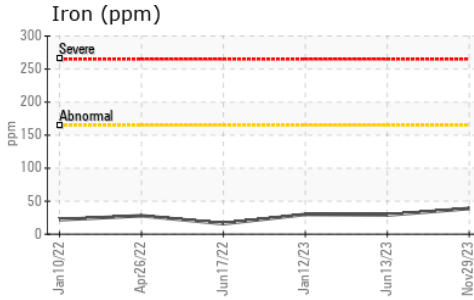

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 504 - Edmonton  
**Sample No.** : GFL0090758 **Received** : 20 Dec 2023  
**Lab Number** : 02604326 **Diagnosed** : 20 Dec 2023  
**Unique Number** : 5697411 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

Contact: Jerrod Adair  
jerrodadair@gflenv.com

T:  
F: