




OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Machine Id
426013
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

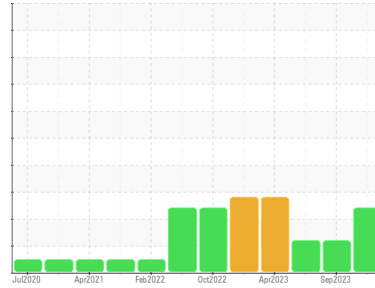

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0097327	GFL0065880	GFL0078509
Sample Date	Client Info		19 Dec 2023	25 Sep 2023	26 Jul 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	17903	17303	16904
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			SEVERE	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	0.0	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	5	5	9
Chromium	ppm	ASTM D5185(m) >20	0	0	<1
Nickel	ppm	ASTM D5185(m) >5	<1	0	0
Titanium	ppm	ASTM D5185(m) >2	0	0	<1
Silver	ppm	ASTM D5185(m) >2	0	<1	0
Aluminum	ppm	ASTM D5185(m) >20	3	1	2
Lead	ppm	ASTM D5185(m) >40	<1	2	2
Copper	ppm	ASTM D5185(m) >330	<1	<1	<1
Tin	ppm	ASTM D5185(m) >15	<1	0	<1
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	22	25	25
Barium	ppm	ASTM D5185(m) 0	0	<1	0
Molybdenum	ppm	ASTM D5185(m) 60	39	38	44
Manganese	ppm	ASTM D5185(m) 0	0	0	<1
Magnesium	ppm	ASTM D5185(m) 1010	481	480	534
Calcium	ppm	ASTM D5185(m) 1070	1633	1661	1734
Phosphorus	ppm	ASTM D5185(m) 1150	702	705	842
Zinc	ppm	ASTM D5185(m) 1270	818	839	923
Sulfur	ppm	ASTM D5185(m) 2060	2033	2019	2175
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	4	4	5
Sodium	ppm	ASTM D5185(m)	2	3	4
Potassium	ppm	ASTM D5185(m) >20	<1	12	<1
Fuel	%	ASTM D7593* >3.0	5	4.1	4.5

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	0.1	0	0.3
Nitration	Abs/cm	ASTM D7624* >20	8.7	7.8	9.5
Sulfation	Abs./1mm	ASTM D7415* >30	21.7	22.1	22.6



OIL ANALYSIS REPORT







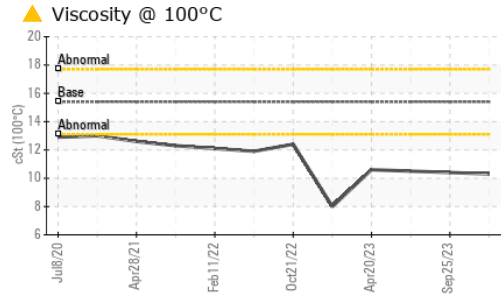
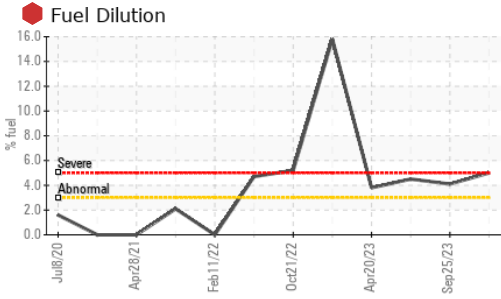


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	21.1	20.8	21.3

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 10.3	▲ 10.4	▲ 10.5

GRAPHS

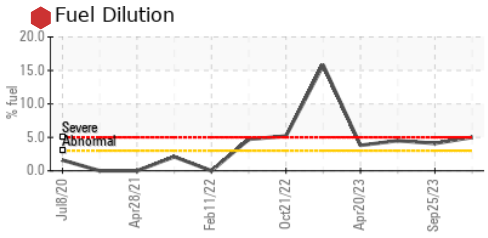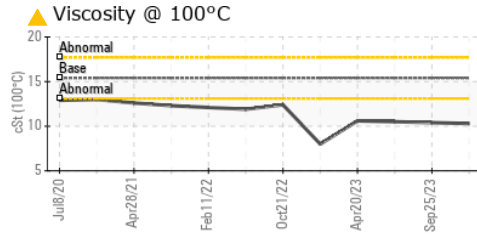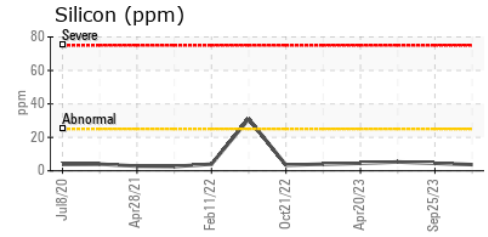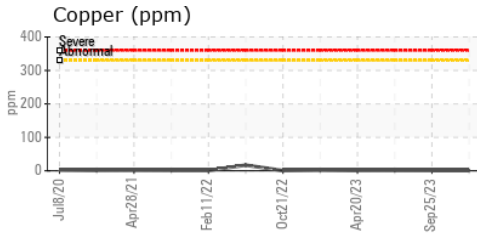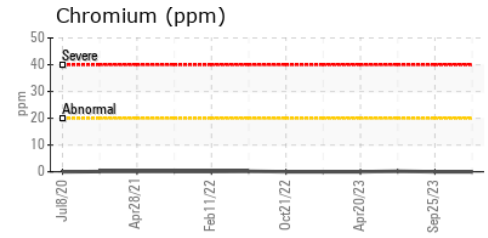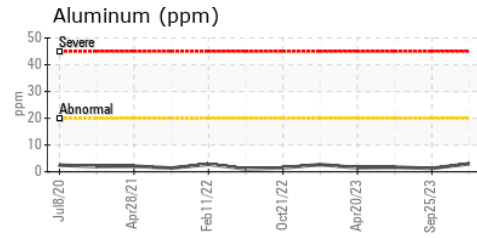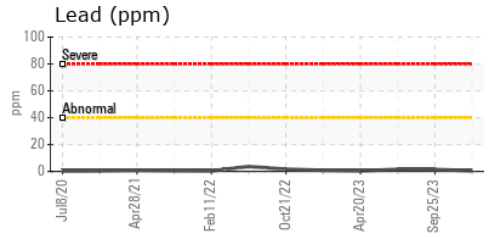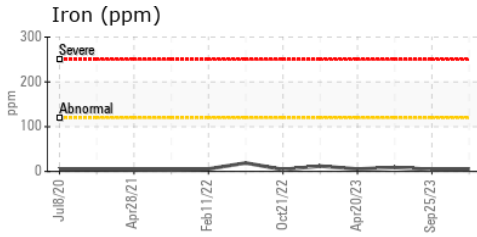

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 246 - Windsor**
Sample No. : GFL0097327 **Received** : 20 Dec 2023 2700 Deziel Dr
Lab Number : **02604332** **Diagnosed** : 21 Dec 2023 Windsor, ON
Unique Number : 5697417 **Diagnostician** : Wes Davis CA N8W 5H8
Test Package : MOB 1 (Additional Tests: PercentFuel, Visual) Contact: Dave Varga
 dvarga@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.