


Machine Id
8014

Component
Rear Diesel Engine

Fluid
PETRO CANADA DURON HP 15W40 (41 LTR)

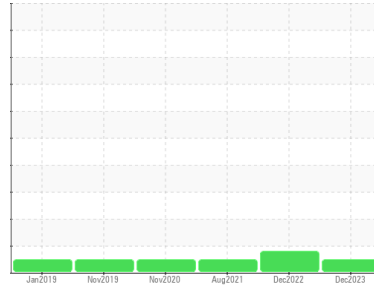

DIAGNOSIS

Recommendation

Nous avons pris note que la vidange d'huile a été effectuée au moment de l'échantillonnage. Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Aucune autre mesure corrective n'est recommandée pour l'instant.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Légère dilution de carburant dans l'huile. Aucun autre contaminant n'a été détecté dans l'huile.

Fluid Condition

Le résultat pour le BN indique que la réserve d'alcalinité est acceptable pour l'huile. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0079640	PC0063262	PC0050150
Sample Date	Client Info		19 Dec 2023	14 Dec 2022	09 Aug 2021
Machine Age	kms	Client Info	866449	0	0
Oil Age	kms	Client Info	56481	83288	97041
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	MARGINAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	31	51	22
Chromium	ppm	ASTM D5185(m) >20	<1	1	<1
Nickel	ppm	ASTM D5185(m) >2	2	2	1
Titanium	ppm	ASTM D5185(m)	0	<1	0
Silver	ppm	ASTM D5185(m) >2	0	0	0
Aluminum	ppm	ASTM D5185(m) >25	6	8	8
Lead	ppm	ASTM D5185(m) >40	1	5	<1
Copper	ppm	ASTM D5185(m) >330	5	8	4
Tin	ppm	ASTM D5185(m) >15	<1	1	<1
Antimony	ppm	ASTM D5185(m)	0	<1	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<1	<1	1
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	59	58	58
Manganese	ppm	ASTM D5185(m) 0	0	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	954	948	1013
Calcium	ppm	ASTM D5185(m) 1070	1043	1138	1043
Phosphorus	ppm	ASTM D5185(m) 1150	968	1008	1033
Zinc	ppm	ASTM D5185(m) 1270	1165	1206	1227
Sulfur	ppm	ASTM D5185(m) 2060	2057	1916	2288
Lithium	ppm	ASTM D5185(m)	<1	<1	<1






CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	6	8	9
Sodium	ppm	ASTM D5185(m)	11	11	7
Potassium	ppm	ASTM D5185(m) >20	0	1	2
Fuel	%	ASTM D7593* >6.0	2.7	▲ 3.1	<1.0

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0.5	0.6	0.2
Nitration	Abs/cm	ASTM D7624* >20	10.2	15.3	8.4
Sulfation	Abs./1mm	ASTM D7415* >30	23.7	29.0	20.6

OIL ANALYSIS REPORT





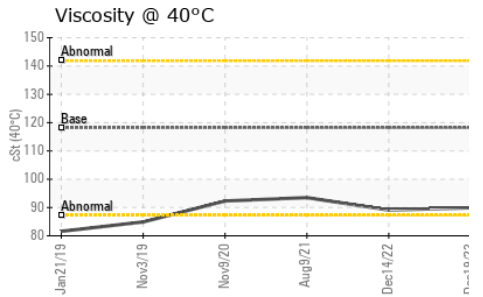
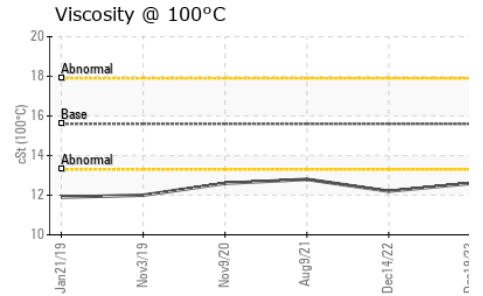
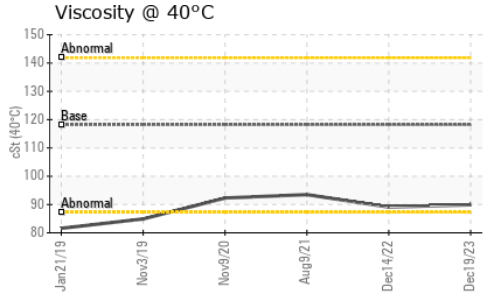
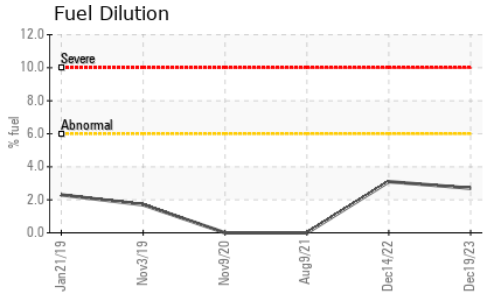


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.3	29.5	15.9
Base Number (BN)	mg KOH/g	ASTM D2896*	9.8	6.48	4.16	7.91

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	118.2	89.9	89.1	93.5
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	12.6	12.2	12.8
Viscosity Index (VI)	Scale	ASTM D2270*	139	136	130	133

GRAPHS

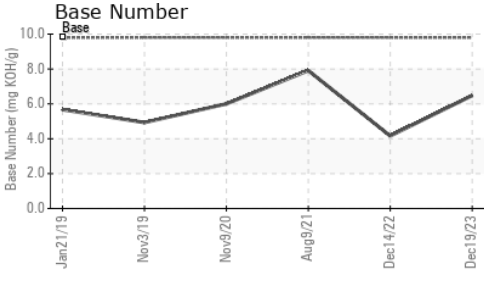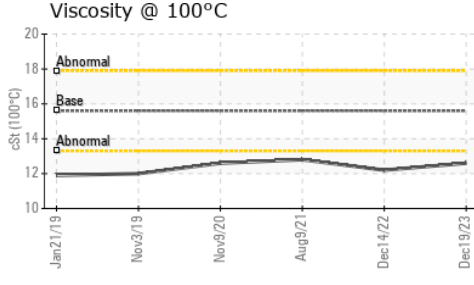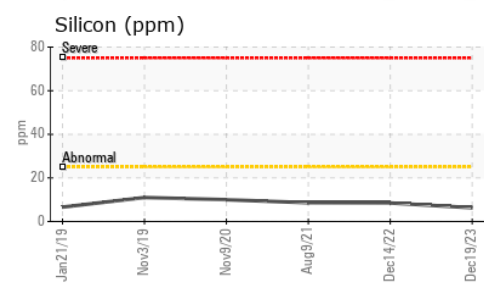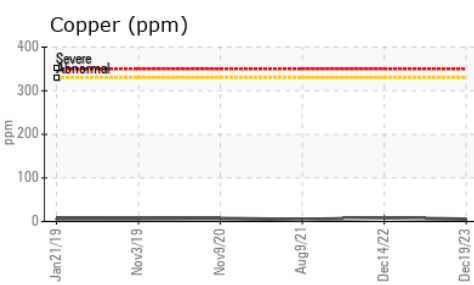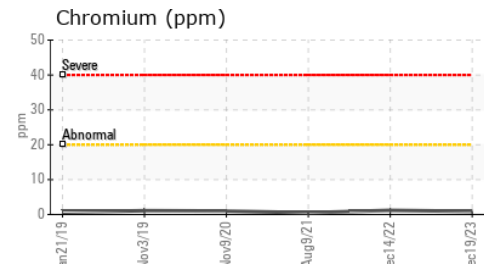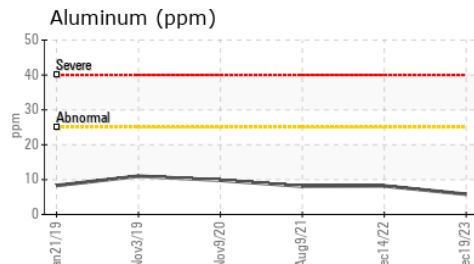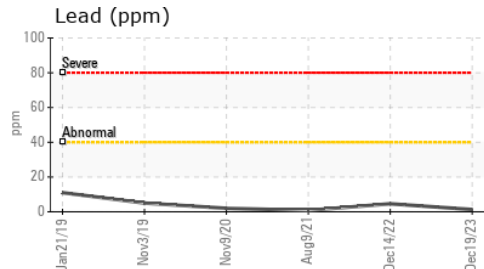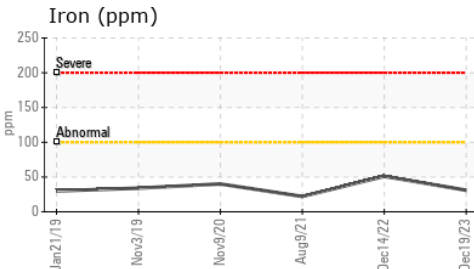

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0079640 **Received** : 28 Dec 2023
Lab Number : **02605521** **Tested** : 29 Dec 2023
Unique Number : 5698606 **Diagnosed** : 29 Dec 2023 - Wes Davis
Test Package : MOB 2 (Additional Tests: FuelDilution, KV40, PercentFuel, VI)

TRANSDEV ST-JEAN
 720 TROTTER
 ST-JEAN-SUR-RICHELIEU, QC
 CA J3B 8T2
 Contact: Eric Breton
 eric.breton@transdev.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: