




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

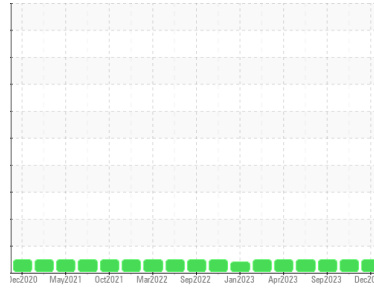

Machine Id  
**928062**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0090393</b>	GFL0090414	GFL0071481
Sample Date	Client Info		<b>21 Dec 2023</b>	24 Nov 2023	19 Sep 2023
Machine Age	kms	Client Info	<b>305068</b>	301953	294269
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	<b>3</b>	5	5
Chromium	ppm	ASTM D5185(m) >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m) >2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m) >20	<b>2</b>	2	1
Lead	ppm	ASTM D5185(m) >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m) >330	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185(m) >15	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>2</b>	2	2
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m) 60	<b>58</b>	59	61
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 1010	<b>980</b>	967	986
Calcium	ppm	ASTM D5185(m) 1070	<b>1064</b>	1040	1057
Phosphorus	ppm	ASTM D5185(m) 1150	<b>1000</b>	956	981
Zinc	ppm	ASTM D5185(m) 1270	<b>1173</b>	1171	1191
Sulfur	ppm	ASTM D5185(m) 2060	<b>2706</b>	2256	2266
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>3</b>	2	3
Sodium	ppm	ASTM D5185(m)	<b>2</b>	4	4
Potassium	ppm	ASTM D5185(m) >20	<b>2</b>	0	<1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	<b>0.1</b>	0.3	0.3
Nitration	Abs/cm	ASTM D7624* >20	<b>6.0</b>	7.6	7.3
Sulfation	Abs./1mm	ASTM D7415* >30	<b>18.6</b>	19.7	19.5



# OIL ANALYSIS REPORT

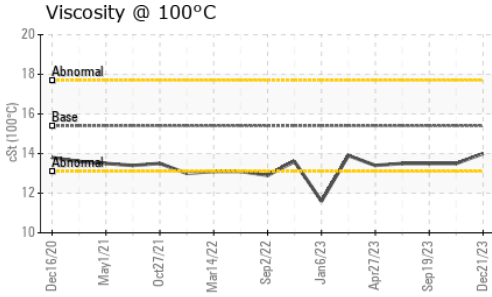

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	14.4	15.9









### VISUAL

	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

### FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.0	13.5

### GRAPHS

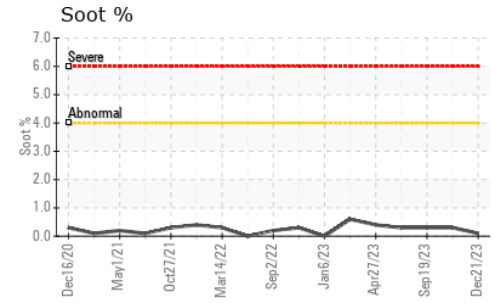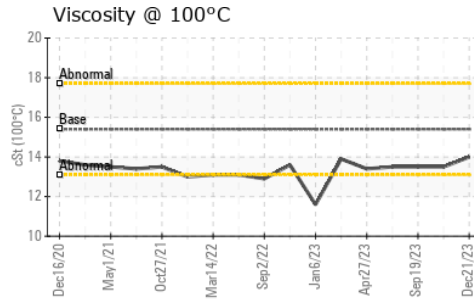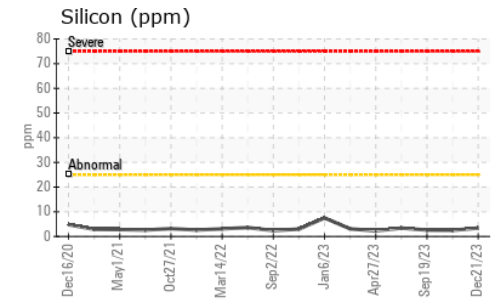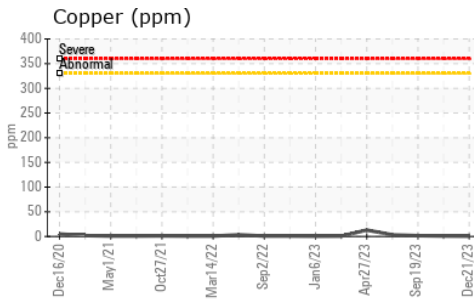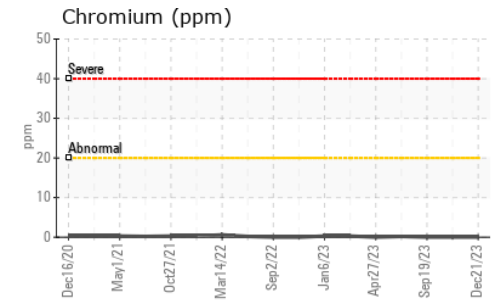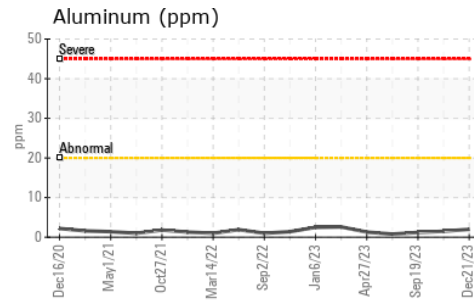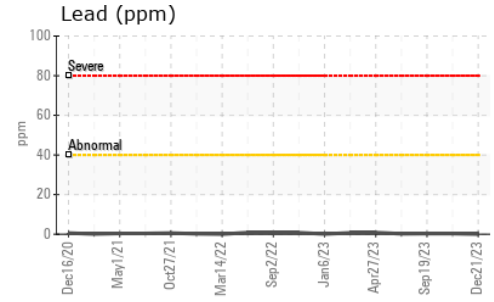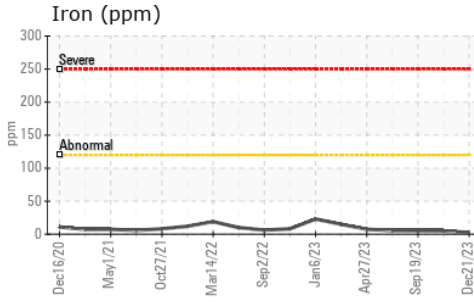

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0090393 **Received** : 02 Jan 2024  
**Lab Number** : **02605756** **Diagnosed** : 02 Jan 2024  
**Unique Number** : 5698841 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**GFL Environmental - 216M**  
 2475 Beryl Drive  
 Oakville, ON  
 CA L6J 7X4  
 Contact: Matthew Gunness  
 mgunness@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: