




OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY



Machine Id
413151
Component
Diesel Engine
Fluid
SAE 10W40 (--- GAL)

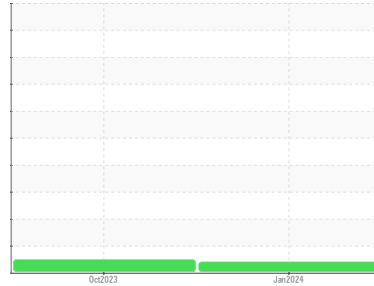

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0101700	GFL0097594	---
Sample Date	Client Info		01 Jan 2024	26 Oct 2023	---
Machine Age	hrs	Client Info	0	1556	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	10	19	---
Chromium	ppm	ASTM D5185(m)	>20	0	<1	---
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	---
Titanium	ppm	ASTM D5185(m)	>2	0	0	---
Silver	ppm	ASTM D5185(m)	>2	<1	1	---
Aluminum	ppm	ASTM D5185(m)	>20	2	3	---
Lead	ppm	ASTM D5185(m)	>40	1	4	---
Copper	ppm	ASTM D5185(m)	>330	22	146	---
Tin	ppm	ASTM D5185(m)	>15	<1	1	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		2	4	---
Barium	ppm	ASTM D5185(m)		0	<1	---
Molybdenum	ppm	ASTM D5185(m)		59	66	---
Manganese	ppm	ASTM D5185(m)		0	<1	---
Magnesium	ppm	ASTM D5185(m)		980	1046	---
Calcium	ppm	ASTM D5185(m)		1079	1172	---
Phosphorus	ppm	ASTM D5185(m)		1023	1050	---
Zinc	ppm	ASTM D5185(m)		1188	1291	---
Sulfur	ppm	ASTM D5185(m)		2641	2474	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	2	4	---
Sodium	ppm	ASTM D5185(m)	>401	1	2	---
Potassium	ppm	ASTM D5185(m)	>20	4	5	---
Fuel	%	ASTM D7593*	>3.0	0.6	<1.0	---

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	0.2	0.3	---
Nitration	Abs/cm	ASTM D7624*	>20	7.6	8.6	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.7	20.5	---



OIL ANALYSIS REPORT

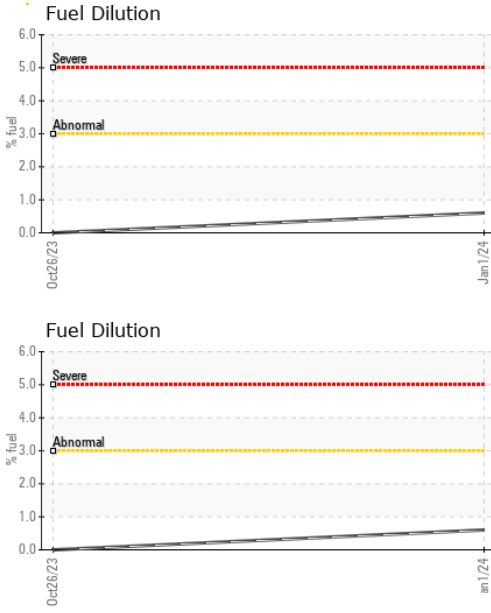

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs./1mm ASTM D7414*	>25	15.7	16.4	---









VISUAL

method	limit/base	current	history1	history2	
White Metal	scalar Visual*	NONE	NONE	---	---
Yellow Metal	scalar Visual*	NONE	NONE	---	---
Precipitate	scalar Visual*	NONE	NONE	---	---
Silt	scalar Visual*	NONE	NONE	---	---
Debris	scalar Visual*	NONE	NONE	---	---
Sand/Dirt	scalar Visual*	NONE	NONE	---	---
Appearance	scalar Visual*	NORML	NORML	---	---
Odor	scalar Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar Visual*	>0.2	NEG	NEG	---
Free Water	scalar Visual*		NEG	NEG	---

FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 100°C	cSt ASTM D7279(m)	14.5	▲ 11.1	11.2	---

GRAPHS

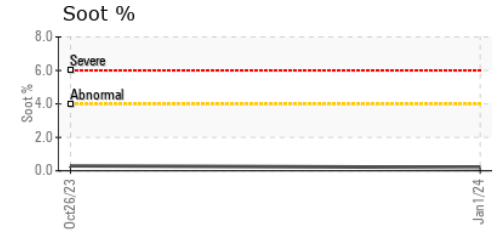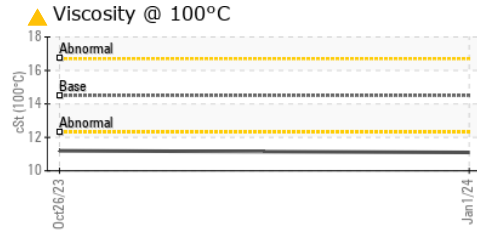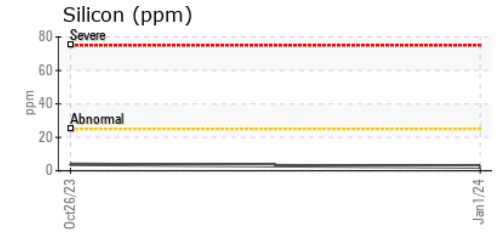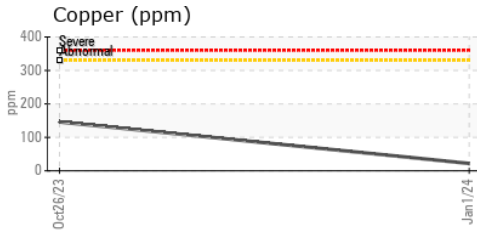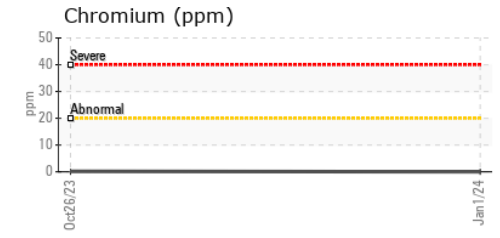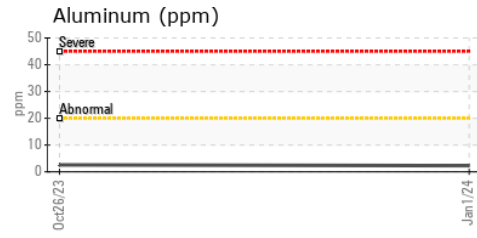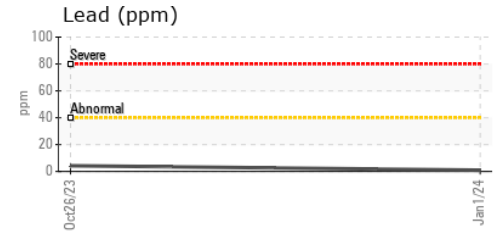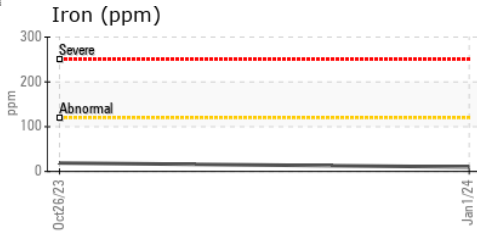

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0101700 **Received** : 02 Jan 2024
Lab Number : 02605791 **Diagnosed** : 03 Jan 2024
Unique Number : 5698876 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F: