


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

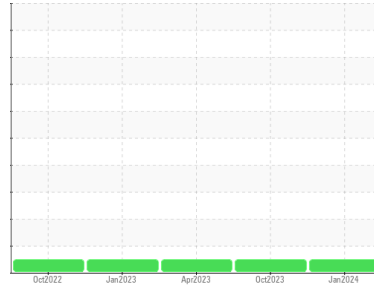

Machine Id
1521
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0083630	PC0075859	PC0070841
Sample Date	Client Info			16 Jan 2024	10 Oct 2023	16 Apr 2023
Machine Age	hrs	Client Info		2916	2499	1535
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	28	33	51
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	11	17	30
Lead	ppm	ASTM D5185(m)	>40	0	<1	<1
Copper	ppm	ASTM D5185(m)	>330	1	2	3
Tin	ppm	ASTM D5185(m)	>15	<1	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	1	1	6
Barium	ppm	ASTM D5185(m)	10	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	55	60	62
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	913	974	968
Calcium	ppm	ASTM D5185(m)	3000	1305	1180	1200
Phosphorus	ppm	ASTM D5185(m)	1150	1059	1041	1100
Zinc	ppm	ASTM D5185(m)	1350	1230	1268	1227
Sulfur	ppm	ASTM D5185(m)	4250	2823	2507	2643
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	13	12	14
Sodium	ppm	ASTM D5185(m)	>158	2	2	2
Potassium	ppm	ASTM D5185(m)	>20	20	37	54

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.1	0	0.1
Nitration	Abs/cm	ASTM D7624*	>20	9.7	6.0	10.0
Sulfation	Abs.1mm	ASTM D7415*	>30	21.8	18.7	20.4

OIL ANALYSIS REPORT







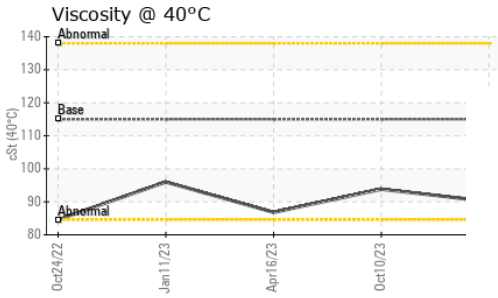
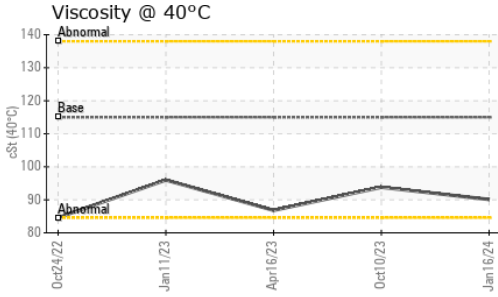


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	18.0	13.4	16.6

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	115	90.1	93.8	86.8
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.5	13.8	12.9
Viscosity Index (VI)	Scale	ASTM D2270*	126	151	149	147

GRAPHS

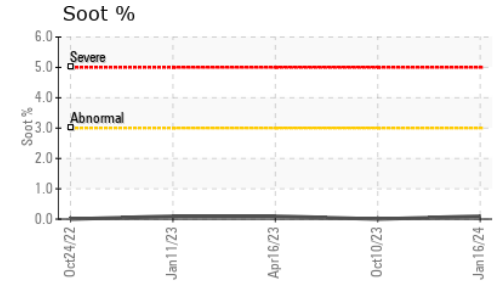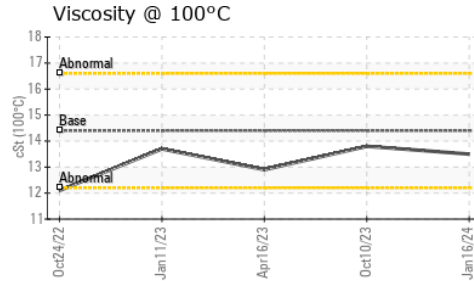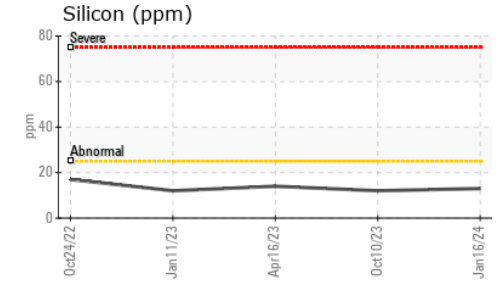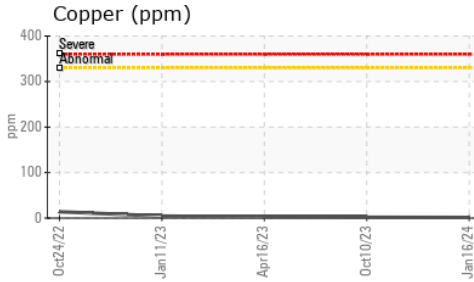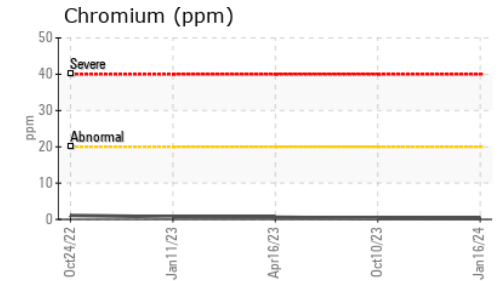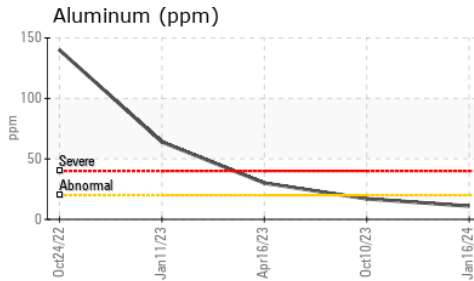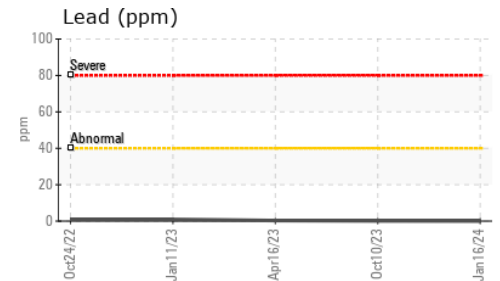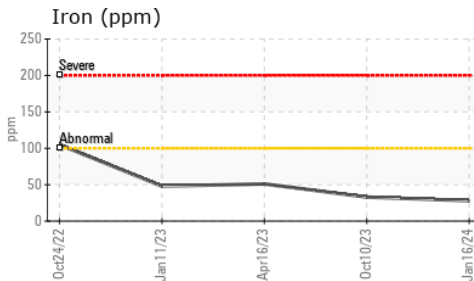

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **LES ENTREPRISES MICHAUVILLE INC.**
Sample No. : PC0083630 **Received** : 17 Jan 2024 270 RUE BRUNET
Lab Number : 02609247 **Diagnosed** : 18 Jan 2024 MONT ST-HILAIRE, QC
Unique Number : 5710333 **Diagnostician** : Wes Davis CA J3H 0M6
Test Package : MOB 1 (Additional Tests: KV40, VI) Contact: Martin Trudel

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

mtrudel@michaudville.com
T:
F: