


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

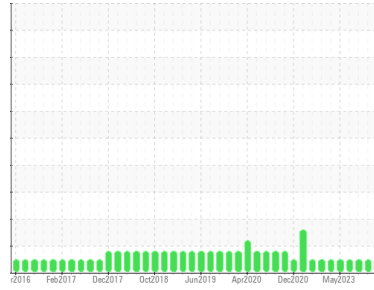

Area  
**Cranes**  
Machine Id  
**Crane - Aft - Slewing Gearbox N°1 (S/N Sample Tag MA-04001-S7)**  
Component  
**Gearbox**  
Fluid  
**PETRO CANADA GEARLUBE TOS 80W90 (8 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PC0076377</b>	PC	PC0039822
Sample Date	Client Info	<b>31 Dec 2023</b>	26 Nov 2023	12 Sep 2023
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	<b>0</b>	0	0
Iron	ppm ASTM D5185(m) >150	<b>10</b>	7	10
Chromium	ppm ASTM D5185(m) >10	<b>0</b>	0	0
Nickel	ppm ASTM D5185(m) >10	<b>2</b>	<1	2
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Aluminum	ppm ASTM D5185(m) >5	<b>&lt;1</b>	0	0
Lead	ppm ASTM D5185(m) >65	<b>&lt;1</b>	<1	<1
Copper	ppm ASTM D5185(m) >80	<b>12</b>	4	7
Tin	ppm ASTM D5185(m) >8	<b>&lt;1</b>	0	0
Antimony	ppm ASTM D5185(m) >5	<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0






## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 240	<b>197</b>	226	212
Barium	ppm ASTM D5185(m) 1	<b>3</b>	2	2
Molybdenum	ppm ASTM D5185(m) 0.0	<b>0</b>	0	0
Manganese	ppm ASTM D5185(m)	<b>0</b>	0	<1
Magnesium	ppm ASTM D5185(m) 2	<b>1</b>	<1	<1
Calcium	ppm ASTM D5185(m) 6	<b>24</b>	23	24
Phosphorus	ppm ASTM D5185(m) 1000	<b>985</b>	973	1086
Zinc	ppm ASTM D5185(m) 3	<b>237</b>	239	251
Sulfur	ppm ASTM D5185(m) 19400	<b>21863</b>	22110	22882
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >20	<b>2</b>	2	3
Sodium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Potassium	ppm ASTM D5185(m) >20	<b>0</b>	0	<1

# OIL ANALYSIS REPORT

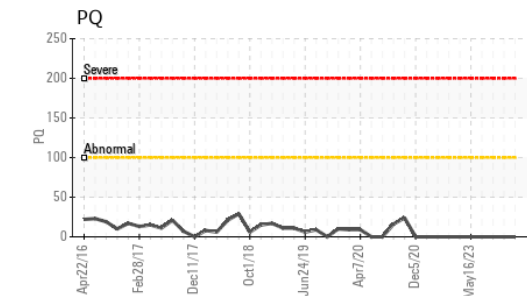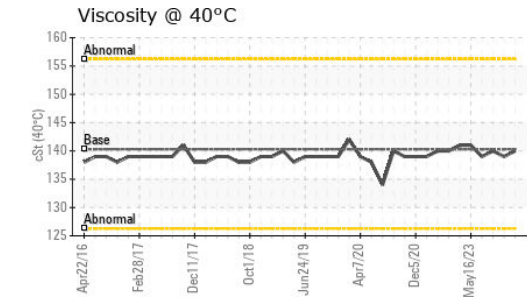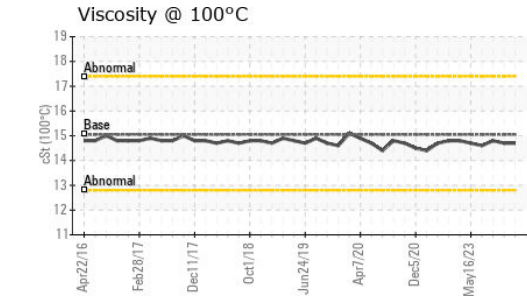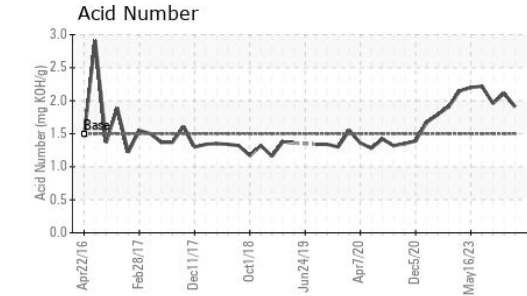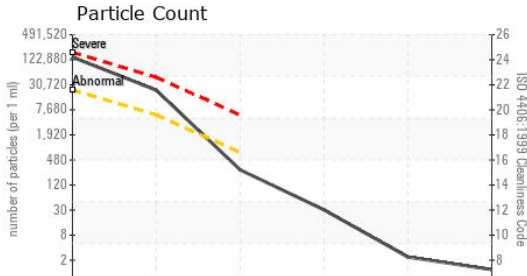


FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	<b>123326</b>	46965	106199	
Particles >6µm	ASTM D7647	>5000	<b>19735</b>	10116	20151	
Particles >14µm	ASTM D7647	>640	<b>244</b>	506	269	
Particles >21µm	ASTM D7647	>160	<b>27</b>	95	38	
Particles >38µm	ASTM D7647	>40	<b>2</b>	8	3	
Particles >71µm	ASTM D7647	>10	<b>1</b>	5	3	
Oil Cleanliness	ISO 4406 (c)	>21/19/16	<b>24/21/15</b>	23/21/16	24/22/15	

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	1.5	<b>1.91</b>	2.11	1.96

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	140.3	<b>140</b>	139	140
Visc @ 100°C	cSt	ASTM D7279(m)	15.05	<b>14.7</b>	14.7	14.8
Viscosity Index (VI)	Scale	ASTM D2270*	109	<b>104</b>	105	105

**SAMPLE IMAGES** method limit/base current history1 history2

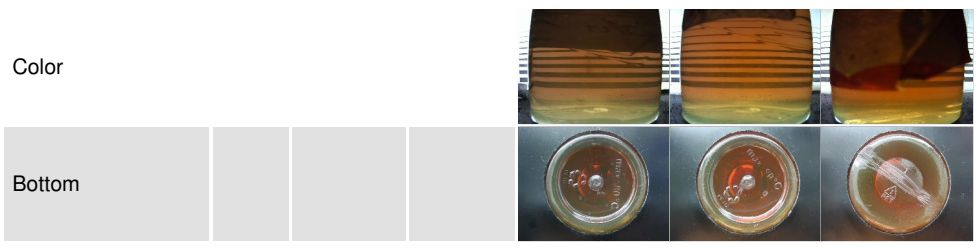

Color  
  
Bottom



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0076377 **Received** : 17 Jan 2024  
**Lab Number** : **02609525** **Diagnosed** : 22 Jan 2024  
**Unique Number** : 5710611 **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: KV100, PQ, PrtCount, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**Suncor - Terra Nova Projects**  
 Scotia Centre, 235 Water Strret  
 St. John's, NL  
 CA A1C 1B6  
 Contact: Josh Hynes  
 joshhynes@suncor.com  
 T: (709)778-3575  
 F: (709)724-2835