


OIL ANALYSIS REPORT

Sample Rating Trend



DIRT

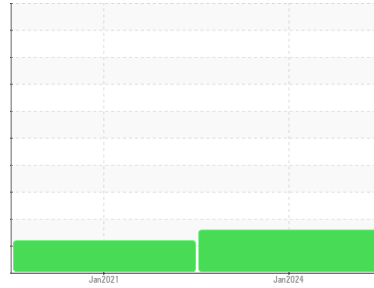

Machine Id

P47

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate concentration of dirt present in the oil.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info		PC0078186	PC0028994	---
Sample Date	Client Info		12 Jan 2024	25 Jan 2021	---
Machine Age	kms	Client Info	0	249110	---
Oil Age	kms	Client Info	0	3765	---
Oil Changed	Client Info		Changed	Not Changd	---
Sample Status			ABNORMAL	ABNORMAL	---

CONTAMINATION method limit/base current history1 history2

Fuel	WC Method	>3.0	<1.0	▲ 2.2	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185(m)	>200	5	43	---
Chromium	ppm	ASTM D5185(m)	>20	0	1	---
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	---
Titanium	ppm	ASTM D5185(m)	>2	0	0	---
Silver	ppm	ASTM D5185(m)	>2	0	0	---
Aluminum	ppm	ASTM D5185(m)	>30	1	2	---
Lead	ppm	ASTM D5185(m)	>30	<1	20	---
Copper	ppm	ASTM D5185(m)	>30	<1	2	---
Tin	ppm	ASTM D5185(m)	>15	0	1	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185(m)	250	<1	2	---
Barium	ppm	ASTM D5185(m)	10	0	0	---
Molybdenum	ppm	ASTM D5185(m)	100	54	49	---
Manganese	ppm	ASTM D5185(m)		0	<1	---
Magnesium	ppm	ASTM D5185(m)	450	906	785	---
Calcium	ppm	ASTM D5185(m)	3000	979	1039	---
Phosphorus	ppm	ASTM D5185(m)	1150	974	804	---
Zinc	ppm	ASTM D5185(m)	1350	1099	1001	---
Sulfur	ppm	ASTM D5185(m)	4250	2675	2299	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---




CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185(m)	>30	▲ 36	7	---
Sodium	ppm	ASTM D5185(m)	>158	1	2	---
Potassium	ppm	ASTM D5185(m)	>20	8	3	---

INFRA-RED method limit/base current history1 history2

Soot %	%	ASTM D7844*	>3	0.1	1.7	---
Nitration	Abs/cm	ASTM D7624*	>20	5.8	10.2	---
Sulfation	Abs./1mm	ASTM D7415*	>30	18.5	25.4	---

OIL ANALYSIS REPORT






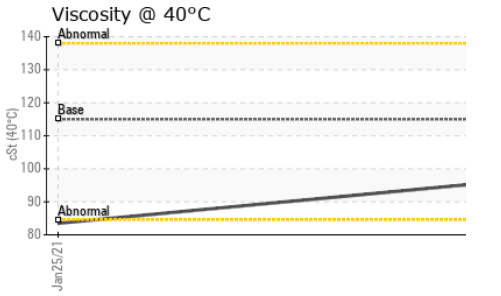
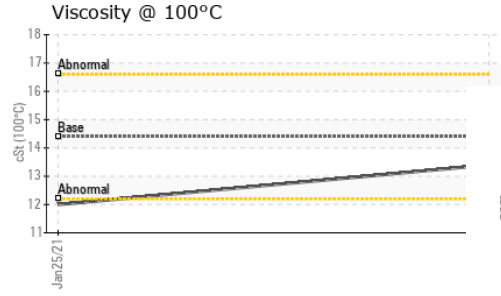
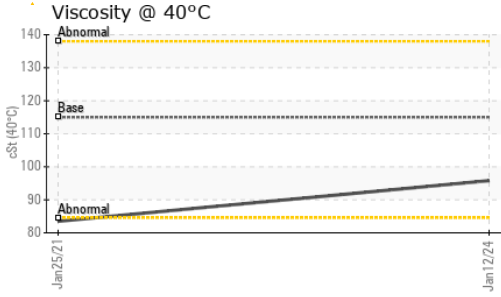


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	15.0	16.4	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	115	95.8	▲ 83.5	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.4	12.0	---
Viscosity Index (VI)	Scale	ASTM D2270*	126	139	137	---

GRAPHS

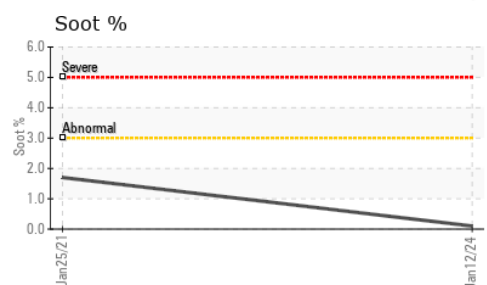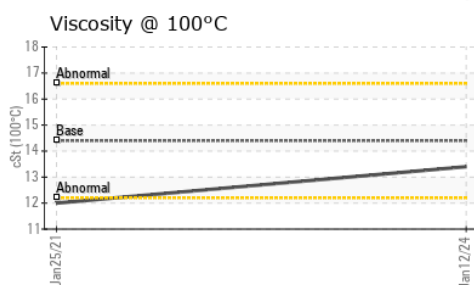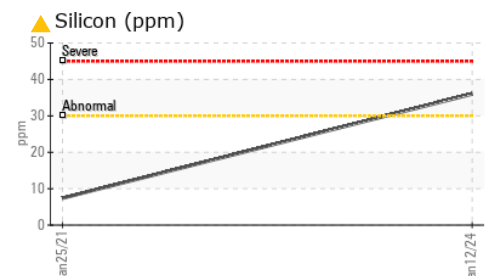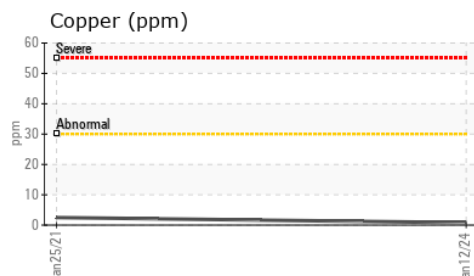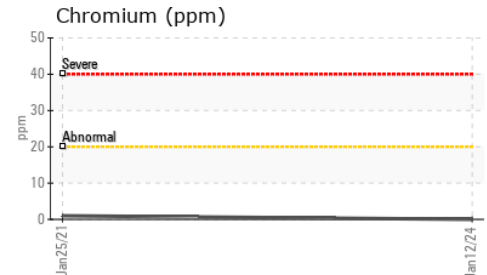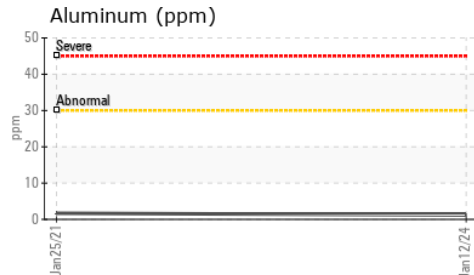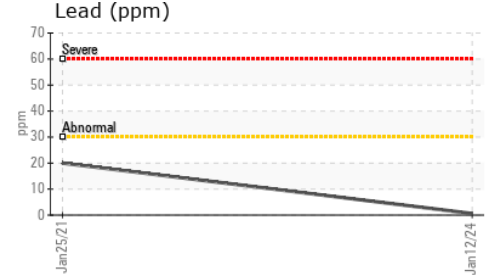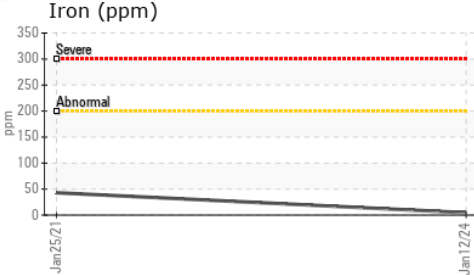

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0078186 **Received** : 18 Jan 2024
Lab Number : 02609688 **Diagnosed** : 18 Jan 2024
Unique Number : 5710774 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: KV40, VI)

HAMILTON FIRE DEPT
 MECHANICAL DIV., 177 BAY STREET NORTH
 HAMILTON, ON
 CA L8R 2P8
 Contact: Jenny-Lynn Pellegrino
 jenny-lynn.pellegrino@hamilton.ca
 T: (905)546-2424
 F: (905)961-9116

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.