




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

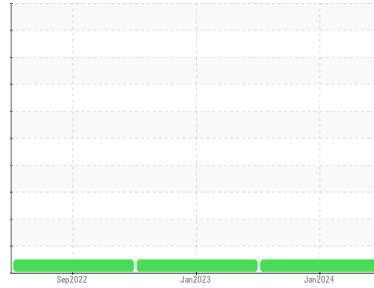

Machine Id
9262
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (36 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0059109	GFL0059062	GFL0059054
Sample Date	Client Info		12 Jan 2024	05 Jan 2023	20 Sep 2022
Machine Age	hrs	Client Info	0	0	6
Oil Age	hrs	Client Info	600	600	600
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	14	16	38
Chromium	ppm	ASTM D5185(m) >20	0	0	<1
Nickel	ppm	ASTM D5185(m) >5	<1	<1	0
Titanium	ppm	ASTM D5185(m) >2	0	<1	<1
Silver	ppm	ASTM D5185(m) >2	0	0	0
Aluminum	ppm	ASTM D5185(m) >20	7	2	2
Lead	ppm	ASTM D5185(m) >40	<1	<1	6
Copper	ppm	ASTM D5185(m) >330	<1	<1	1
Tin	ppm	ASTM D5185(m) >15	<1	<1	2
Antimony	ppm	ASTM D5185(m)	0	<1	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	5	3	7
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	59	62	65
Manganese	ppm	ASTM D5185(m) 0	0	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	984	1010	1048
Calcium	ppm	ASTM D5185(m) 1070	1082	1193	1329
Phosphorus	ppm	ASTM D5185(m) 1150	1027	1109	1222
Zinc	ppm	ASTM D5185(m) 1270	1197	1274	1363
Sulfur	ppm	ASTM D5185(m) 2060	2862	2572	2539
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	4	3	6
Sodium	ppm	ASTM D5185(m)	2	4	10
Potassium	ppm	ASTM D5185(m) >20	<1	0	<1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	0.1	0	0
Nitration	Abs/cm	ASTM D7624* >20	9.2	10.9	6.9
Sulfation	Abs./1mm	ASTM D7415* >30	21.7	25.0	19.8



OIL ANALYSIS REPORT

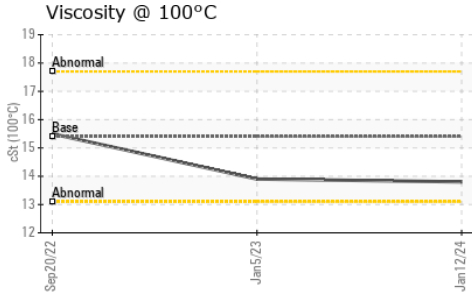

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs./1mm ASTM D7414*	>25	19.0	23.3	15.9









VISUAL

method	limit/base	current	history1	history2	
Emulsified Water	scalar Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar Visual*		NEG	NEG	NEG

FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 100°C	cSt ASTM D7279(m)	15.4	13.8	13.9	15.5

GRAPHS

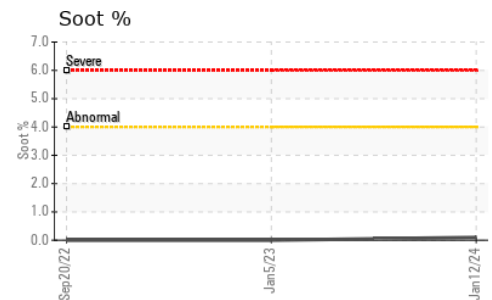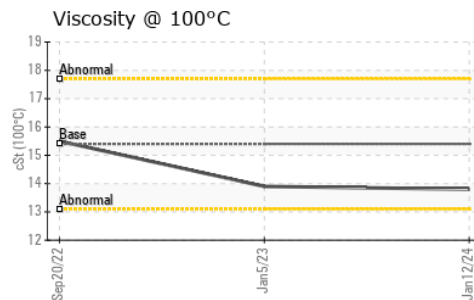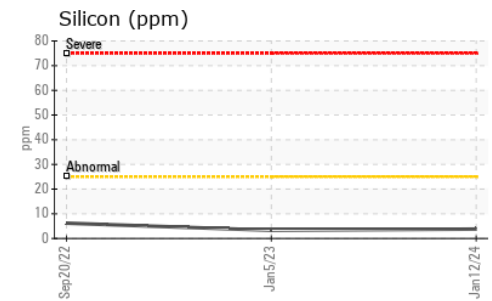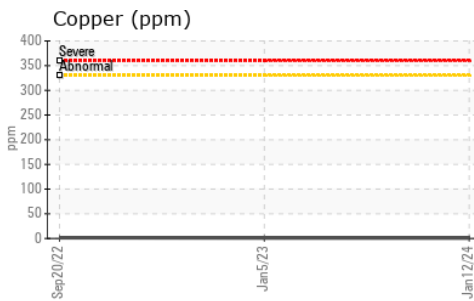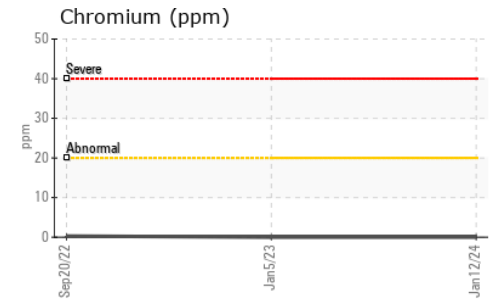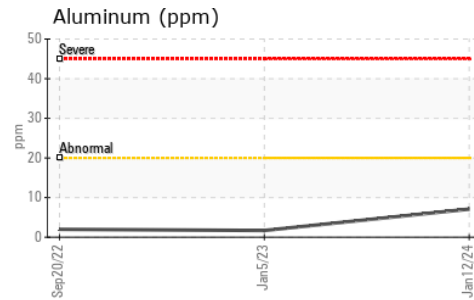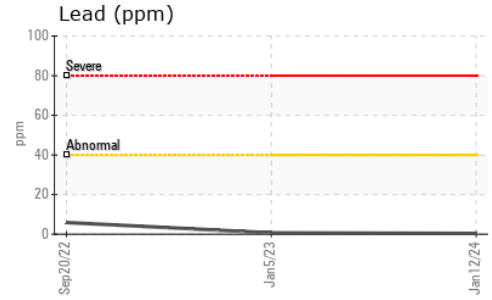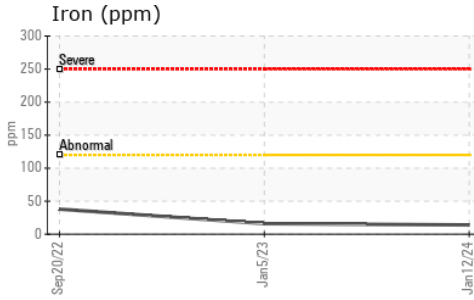

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0059109
Lab Number : 02609832
Unique Number : 5710918
Test Package : MOB 1
Received : 19 Jan 2024
Tested : 19 Jan 2024
Diagnosed : 19 Jan 2024 - Wes Davis

GFL Environmental - 570 - Thunder Bay
 3000 Highway 61,
 Slate River, ON
 CA P7J 0G8
 Contact: Cindy Wall
 cwall@gflenv.com
 T: (807)577-0411
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.