


Machine Id
6020

Component
Rear Diesel Engine

Fluid
PETRO CANADA DURON HP 15W40 (20 LTR)

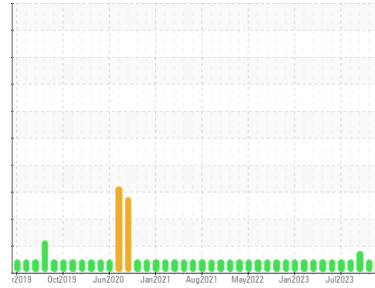

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Il n'y a aucun indice de contamination dans l'huile.

Fluid Condition

Le résultat pour le BN indique que la réserve d'alcalinité est acceptable pour l'huile. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info	PC0079576	PC0079601	PC0079827
Sample Date	Client Info	06 Jan 2024	04 Dec 2023	12 Nov 2023
Machine Age	kms	Client Info	588094	580036
Oil Age	kms	Client Info	8058	7302
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	MARGINAL

CONTAMINATION method limit/base current history1 history2

Fuel	WC Method	>3.0	<1.0	<1.0	▲ 1.2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	0.0	NEG

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185(m)	>130	32	40	27
Chromium	ppm	ASTM D5185(m)	>10	1	2	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	5	5	2
Lead	ppm	ASTM D5185(m)	>20	0	0	0
Copper	ppm	ASTM D5185(m)	>125	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185(m)	0	3	2	3
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	60	58	61	53
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	940	955	838
Calcium	ppm	ASTM D5185(m)	1070	1141	1064	1016
Phosphorus	ppm	ASTM D5185(m)	1150	1010	977	924
Zinc	ppm	ASTM D5185(m)	1270	1191	1209	1150
Sulfur	ppm	ASTM D5185(m)	2060	2588	2466	2305
Lithium	ppm	ASTM D5185(m)		<1	<1	<1




CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185(m)	>25	4	7	3
Sodium	ppm	ASTM D5185(m)		9	45	3
Potassium	ppm	ASTM D5185(m)	>20	7	38	<1

INFRA-RED method limit/base current history1 history2

Soot %	%	ASTM D7844*	>6	1.6	1.5	1.6
Nitration	Abs/cm	ASTM D7624*	>20	9.7	8.9	8.7
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.6	21.5	22.4

OIL ANALYSIS REPORT






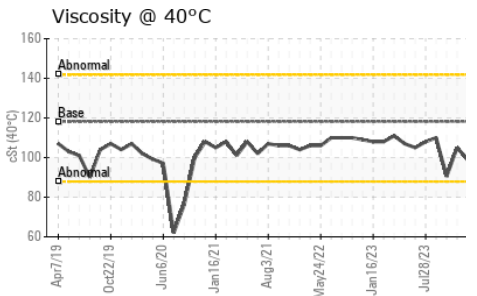
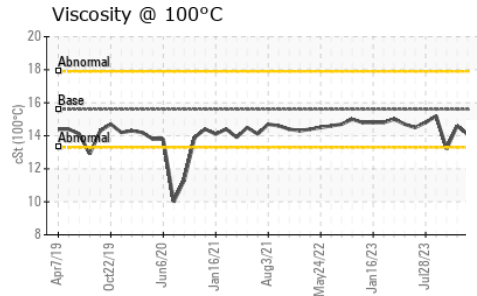
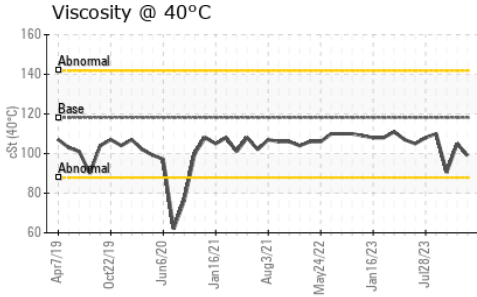


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	16.5	15.1	15.1
Base Number (BN)	mg KOH/g	ASTM D2896*	9.8	9.18	11.84	7.29

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	118.2	99.0	105	90.5
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	14.1	14.6	13.2
Viscosity Index (VI)	Scale	ASTM D2270*	139	145	143	145

GRAPHS

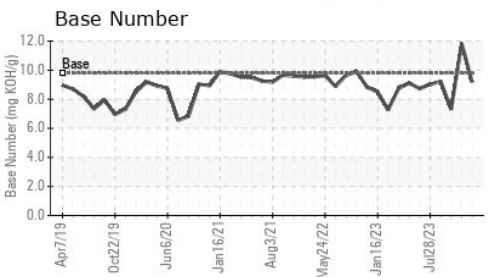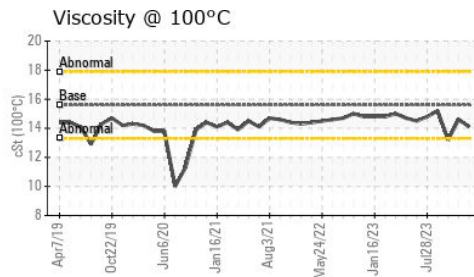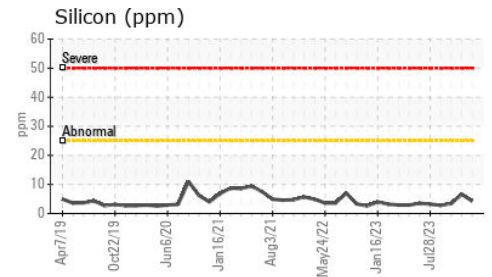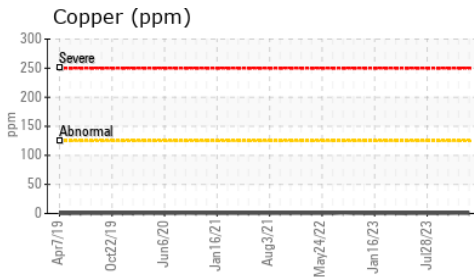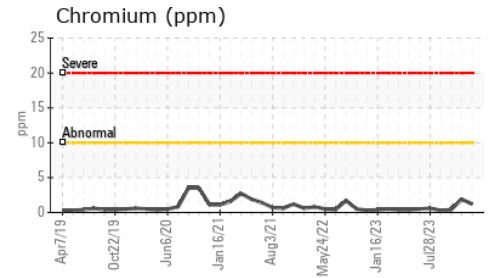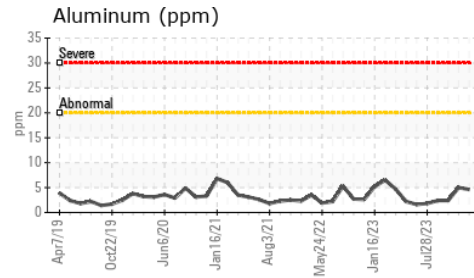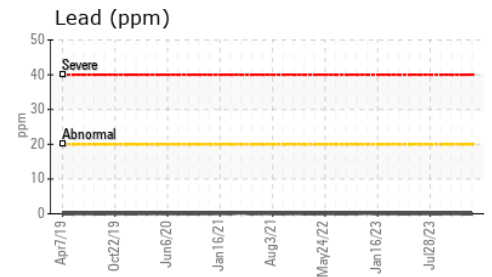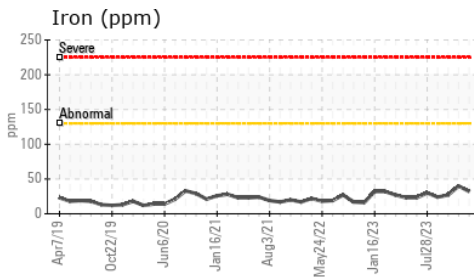

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0079576
Lab Number : **02610205**
Unique Number : 5711291
Test Package : MOB 2 (Additional Tests: KV40, VI)

TRANSDEV ST-JEAN
 720 TROTTER
 ST-JEAN-SUR-RICHELIEU, QC
 CA J3B 8T2
 Contact: Eric Breton
 eric.breton@transdev.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: