


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

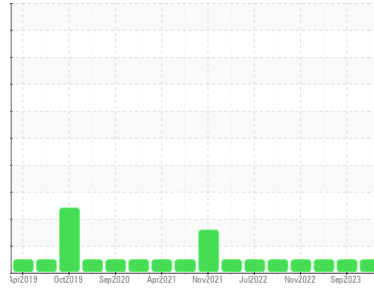

Area  
**MICHAUDVILLE**

Machine Id  
**1212**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0083699</b>	PC0075959	PC0072236
Sample Date	Client Info			<b>21 Jan 2024</b>	26 Sep 2023	14 Jun 2023
Machine Age	hrs	Client Info		<b>17720</b>	17286	16802
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>12</b>	27	28
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>5</b>	12	11
Lead	ppm	ASTM D5185(m)	>40	<b>2</b>	4	2
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	2	4
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>&lt;1</b>	1	2
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>56</b>	60	62
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>915</b>	973	983
Calcium	ppm	ASTM D5185(m)	3000	<b>1292</b>	1189	1185
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1053</b>	1039	1120
Zinc	ppm	ASTM D5185(m)	1350	<b>1211</b>	1257	1242
Sulfur	ppm	ASTM D5185(m)	4250	<b>2864</b>	2638	2686
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>7</b>	7	9
Sodium	ppm	ASTM D5185(m)		<b>4</b>	5	5
Potassium	ppm	ASTM D5185(m)	>20	<b>8</b>	29	29

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0</b>	0.3	0.9
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.2</b>	8.4	9.3
Sulfation	Abs.1mm	ASTM D7415*	>30	<b>22.4</b>	21.7	21.8

# OIL ANALYSIS REPORT







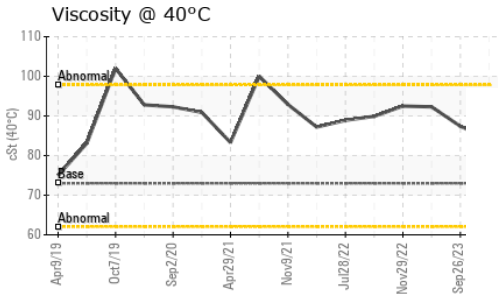
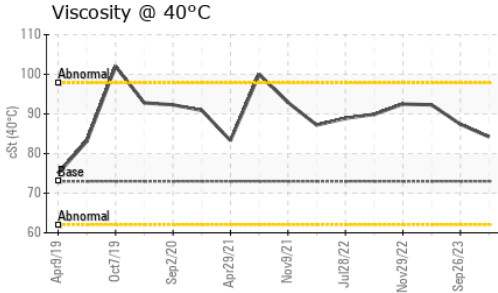


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>17.9</b>	17.0	16.5

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	73	<b>84.2</b>	87.4	92.3
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	<b>12.8</b>	13.0	13.5
Viscosity Index (VI)	Scale	ASTM D2270*	138	<b>150</b>	148	147

## GRAPHS

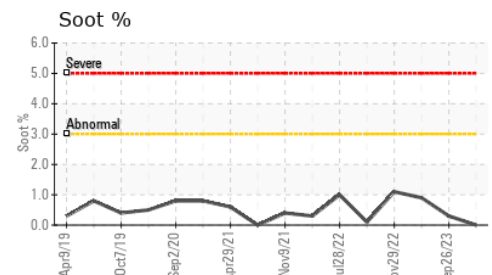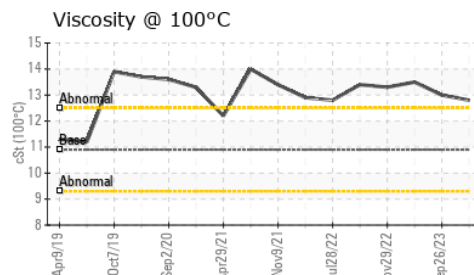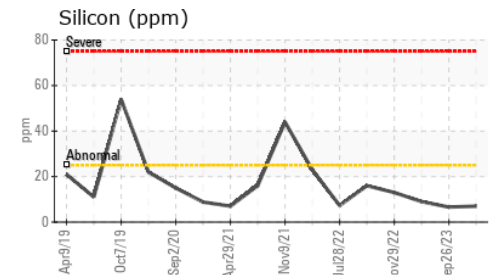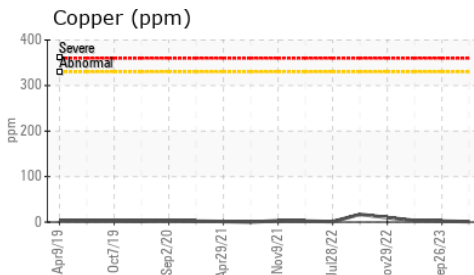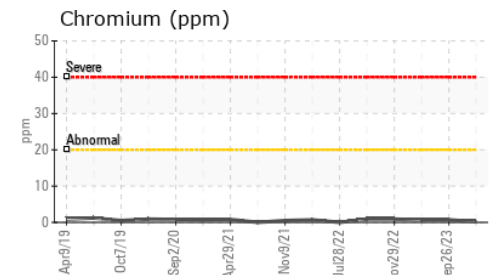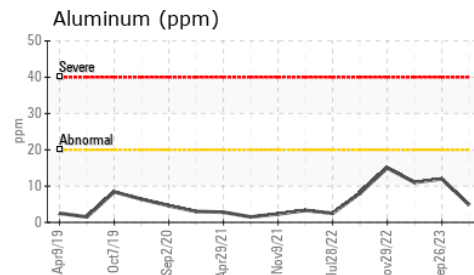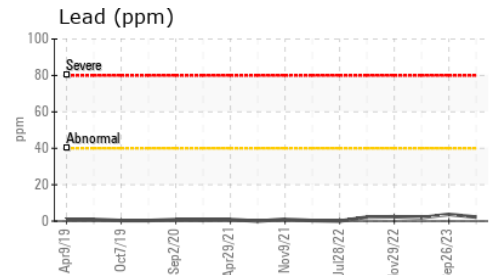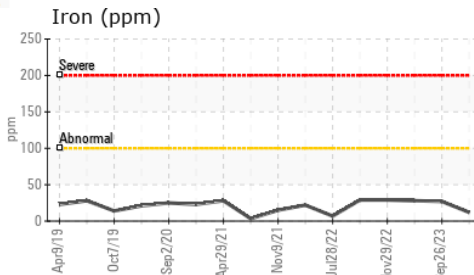

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **LES ENTREPRISES MICHAUDVILLE INC.**  
**Sample No.** : PC0083699 **Received** : 22 Jan 2024 270 RUE BRUNET  
**Lab Number** : **02610216** **Diagnosed** : 22 Jan 2024 MONT ST-HILAIRE, QC  
**Unique Number** : 5711302 **Diagnostician** : Wes Davis CA J3H 0M6  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI) Contact: Martin Trudel

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: