



# OIL ANALYSIS REPORT

Sample Rating Trend


VISCOSITY



Machine Id  
**101016**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (43 GAL)**

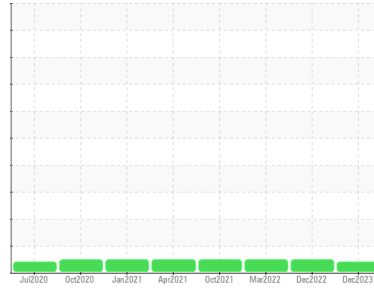

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

Viscosity of sample indicates oil is within SAE 40 range, advise investigate. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0047660</b>	GFL0047674	GFL0047694
Sample Date	Client Info		<b>06 Dec 2023</b>	02 Dec 2022	18 Mar 2022
Machine Age	hrs	Client Info	<b>20817</b>	18500	16773
Oil Age	hrs	Client Info	<b>492</b>	600	657
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>110	<b>5</b>	11	11
Chromium	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>1</b>	3	2
Lead	ppm	ASTM D5185(m)	>45	<b>&lt;1</b>	2	2
Copper	ppm	ASTM D5185(m)	>85	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	<b>34</b>	1	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>51</b>	61	61
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	<b>855</b>	1023	1049
Calcium	ppm	ASTM D5185(m)	1050	<b>1194</b>	1137	1093
Phosphorus	ppm	ASTM D5185(m)	995	<b>785</b>	1083	1091
Zinc	ppm	ASTM D5185(m)	1180	<b>899</b>	1264	1281
Sulfur	ppm	ASTM D5185(m)	2600	<b>2192</b>	2523	2616
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>30	<b>6</b>	3	4
Sodium	ppm	ASTM D5185(m)		<b>3</b>	2	1
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	2	4


## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0</b>	0.1	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.7</b>	8.7	8.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>21.0</b>	20.8	21.3



# OIL ANALYSIS REPORT

▲ Viscosity @ 100°C

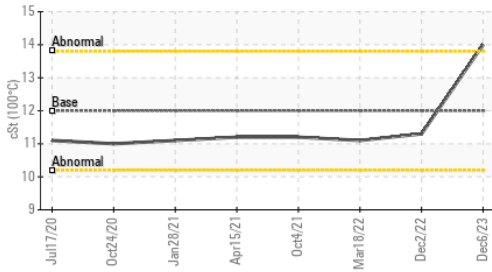

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs./1mm ASTM D7414*	<b>17.8</b>	16.5	15.9









### VISUAL

method	limit/base	current	history1	history2
Emulsified Water	scalar Visual*	<b>NEG</b>	NEG	NEG
Free Water	scalar Visual*	<b>NEG</b>	NEG	NEG

### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D7279(m)	<b>▲ 14.0</b>	11.3	11.1

### GRAPHS

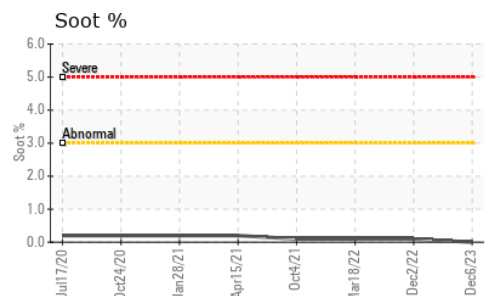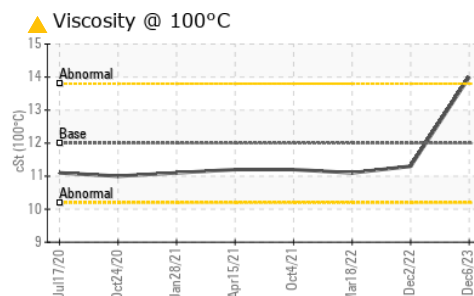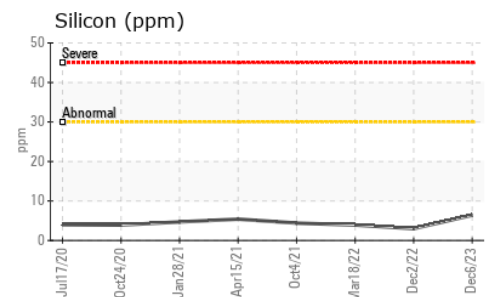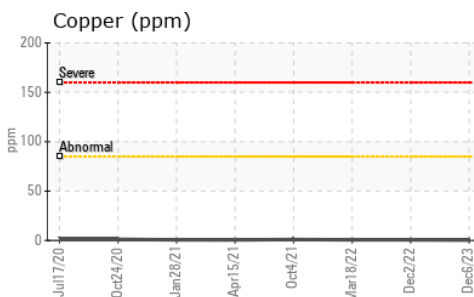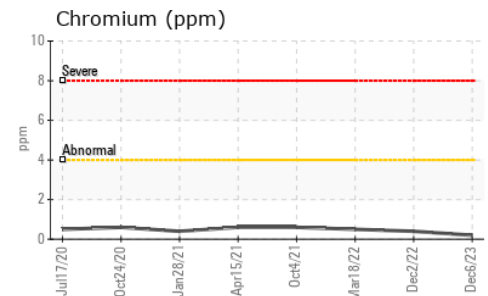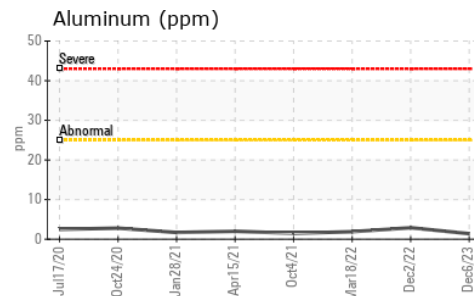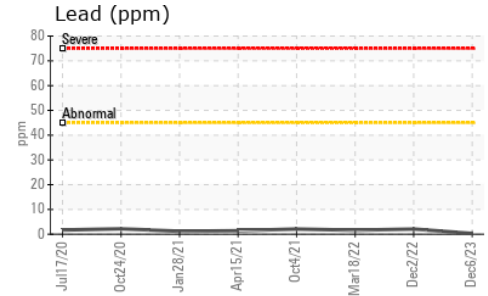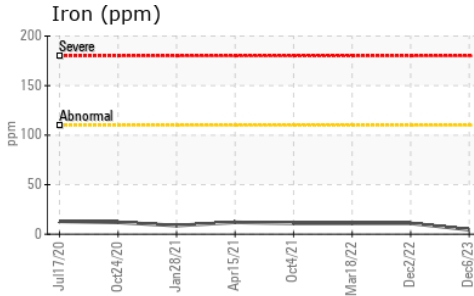

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 355 - Saskatoon**  
**Sample No.** : GFL0047660 **Received** : 22 Jan 2024 100 Cory Road  
**Lab Number** : **02610239** **Diagnosed** : 23 Jan 2024 Saskatoon, SK  
**Unique Number** : 5711325 **Diagnostician** : Kevin Marson CA S7K 3J7  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Ryan Polichuk  
 rpolichuk@gflenv.com  
 T: (306)244-9500  
 F: