

OIL ANALYSIS REPORT

Wachine Id UTL010

Component **Hydraulic System**

{not provided} (--- GAL)

Sample Rating Trend



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component(unconfirmed).


Fluid Condition

The condition of the oil is acceptable for the time in service.

				Jan 2024		
SAMPLE INFO	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC0075035		
Sample Date		Client Info		10 Jan 2024		
Machine Age	hrs	Client Info		553		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINA	TION	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR META	LS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	2		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>10	1		
Lead	ppm	ASTM D5185(m)	>10	1		
Copper	ppm	ASTM D5185(m)	>75	2		
Tin	ppm	ASTM D5185(m)	>10	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		100		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		16		
Calcium	ppm	ASTM D5185(m)		3401		
Phosphorus	ppm	ASTM D5185(m)		1086		
Zinc	ppm	ASTM D5185(m)		1338		
Sulfur	ppm	ASTM D5185(m)		4910		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINA	NTS	method	limit/base	current	history1	history2
	NTS ppm	method ASTM D5185(m)	limit/base >20	current 12	history1 	history2
CONTAMINA Silicon Sodium						



OIL ANALYSIS REPORT

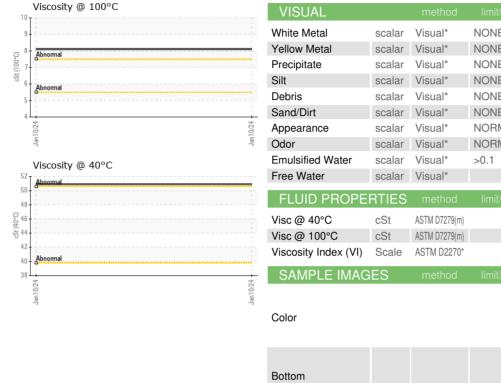

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.1	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		50.9		
Visc @ 100°C	cSt	ASTM D7279(m)		8.1		
Viscosity Index (VI)	Scale	ASTM D2270*		130		
			li		la i a t a m ed	histom O
SAMPLE IMAG	iES	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image
GRAPHS			-			
Iron (ppm)				Lead (ppm)		
40 - Severe			4	Severe		
20 Abnormal			<u>E.</u> 20	Abnormal		
0 2			-54 	127		724
Jan 10,24			Jan 10/24	Jan 10/24		Jan10/24
Aluminum (ppm)			Chromium (pp	om)		
40 T		4	T.			
Severe Abnormal		E. 20	Abnormal			
0				1		
Jan10/24			Jan10/24	Jan10/24		Jan10/24
Copper (ppm)				Silicon (ppm)		
³⁰ T :				T_		
200 - Severe Abnormal			Eg. 50	Severe Abnormal		
0 1			23	1		- 52
Jan 10,724			Jan 10/24	Jan 10,24		Jan 10/24
Viscosity @ 40°C				Additives		
60 T Abnormal			400	T		
Abnormal			- E. 2000	calcium calcium phosphorus		
20				1		
Jan 10/24			Jan10/24	Jan10/24		Jan10/24
,				-		7



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number Unique Number : 5719972

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

: PC0075035 : 02610877

Test Package : MOB 1 (Additional Tests: KV100, VI)

Recieved Diagnosed

: 24 Jan 2024 : 25 Jan 2024 Diagnostician : Kevin Marson

Lakeshore Gold Timmins West Timmins, ON

CA Contact: Dale Arseneau darseneau@ca.panamericansilver.com

T: (705)269-4344

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.