




# OIL ANALYSIS REPORT

Sample Rating Trend

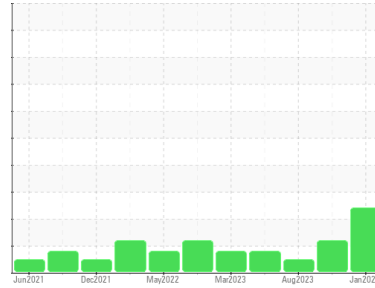

FUEL



Machine Id  
**816003**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (20 LTR)**

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0097440</b>	GFL0085665	GFL0077299
Sample Date	Client Info		<b>22 Jan 2024</b>	25 Oct 2023	08 Aug 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>500</b>	500	500
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>SEVERE</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	<b>21</b>	19	16
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>3</b>	1	2
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>2</b>	2	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>53</b>	54	56
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>841</b>	868	928
Calcium	ppm	ASTM D5185(m)	1070	<b>923</b>	970	994
Phosphorus	ppm	ASTM D5185(m)	1150	<b>899</b>	884	1008
Zinc	ppm	ASTM D5185(m)	1270	<b>1035</b>	1102	1164
Sulfur	ppm	ASTM D5185(m)	2060	<b>2280</b>	2225	2364
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>5</b>	4	3
Sodium	ppm	ASTM D5185(m)		<b>3</b>	2	2
Potassium	ppm	ASTM D5185(m)	>20	<b>6</b>	0	<1
Fuel	%	ASTM D7593*	>5	<b>8.2</b>	6.1	<1.0

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.5</b>	0.4	0.5
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.5</b>	9.7	10.6
Sulfation	Abs.1mm	ASTM D7415*	>30	<b>22.8</b>	20.8	22.2



# OIL ANALYSIS REPORT







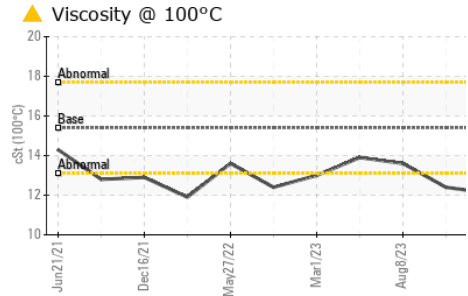
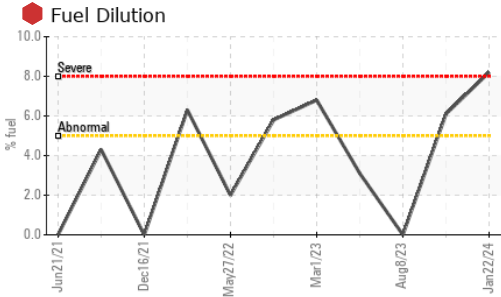


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>21.4</b>	17.9	19.0

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ <b>12.1</b>	▲ 12.4	13.6

## GRAPHS

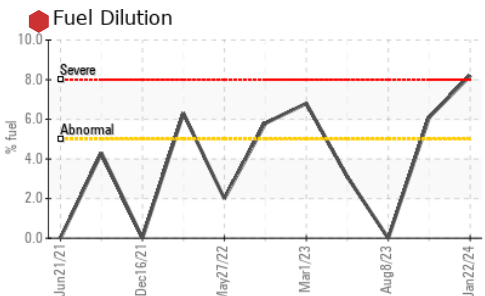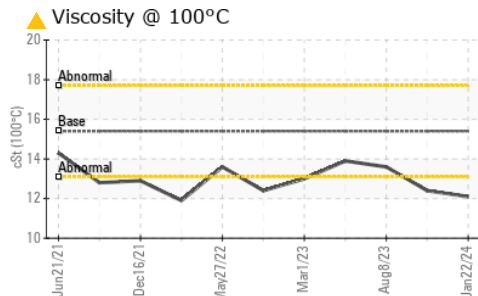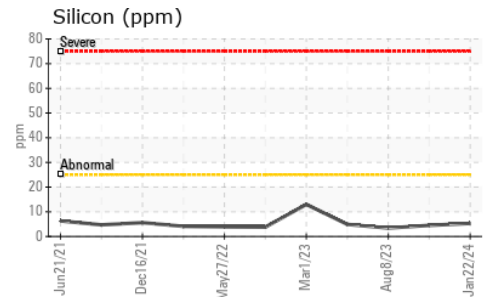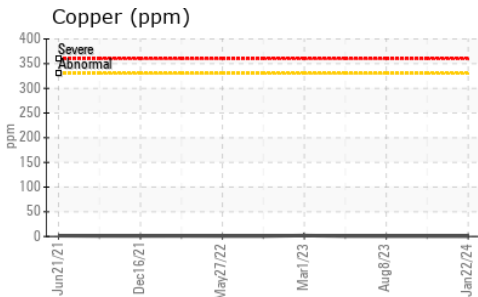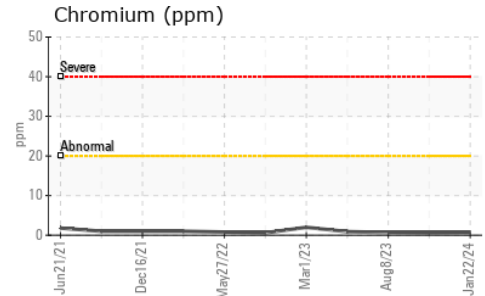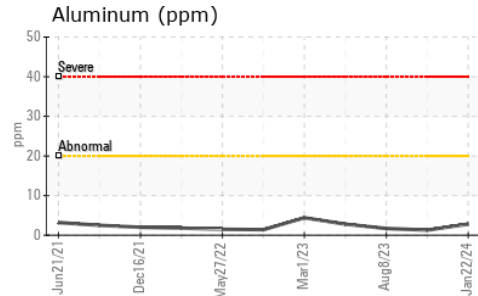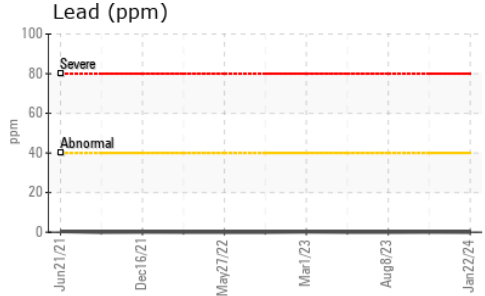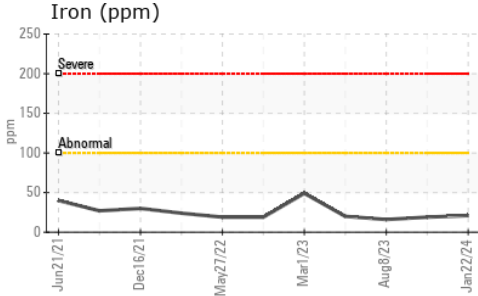

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 221 - Windsor**  
**Sample No.** : GFL0097440 **Received** : 25 Jan 2024 **905 Tecumseh Road W**  
**Lab Number** : **02611085** **Diagnosed** : 26 Jan 2024 **Windsor, ON**  
**Unique Number** : 5720180 **Diagnostician** : Wes Davis **CA N8W 4J5**  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel ) **Contact: Rhys Marotte**  
**rmarotte@gflenv.com**

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.