




OIL ANALYSIS REPORT

Sample Rating Trend

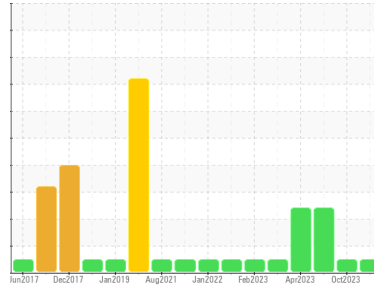

NORMAL



Machine Id
9962

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0102654	GFL0097593	GFL0090612	
Sample Date	Client Info	23 Jan 2024	28 Oct 2023	16 Aug 2023	
Machine Age	hrs	Client Info	28757	0	27751
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A	
Sample Status		NORMAL	NORMAL	ABNORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	▲ 3.2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >110	11	20	66
Chromium	ppm ASTM D5185(m) >4	<1	<1	4
Nickel	ppm ASTM D5185(m) >2	<1	0	0
Titanium	ppm ASTM D5185(m)	0	0	<1
Silver	ppm ASTM D5185(m) >2	0	<1	0
Aluminum	ppm ASTM D5185(m) >25	3	2	3
Lead	ppm ASTM D5185(m) >45	<1	3	5
Copper	ppm ASTM D5185(m) >85	<1	1	2
Tin	ppm ASTM D5185(m) >4	0	0	<1
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 2	2	3	2
Barium	ppm ASTM D5185(m) 0	0	<1	0
Molybdenum	ppm ASTM D5185(m) 50	58	66	55
Manganese	ppm ASTM D5185(m) 0	0	0	<1
Magnesium	ppm ASTM D5185(m) 950	962	1077	909
Calcium	ppm ASTM D5185(m) 1050	1076	1184	975
Phosphorus	ppm ASTM D5185(m) 995	1015	1083	966
Zinc	ppm ASTM D5185(m) 1180	1182	1332	1111
Sulfur	ppm ASTM D5185(m) 2600	2681	2636	2197
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >30	8	6	14
Sodium	ppm ASTM D5185(m)	4	7	10
Potassium	ppm ASTM D5185(m) >20	1	0	<1

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	0.3	0.5	1.5
Nitration	Abs/cm ASTM D7624* >20	7.6	9.0	15.6
Sulfation	Abs/.1mm ASTM D7415* >30	19.4	21.5	▲ 32.9



OIL ANALYSIS REPORT








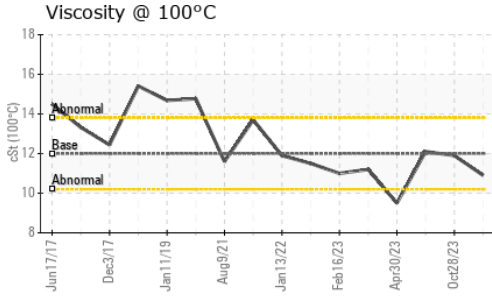


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	15.6	19.0	▲ 38.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	10.9	11.9	12.1

GRAPHS

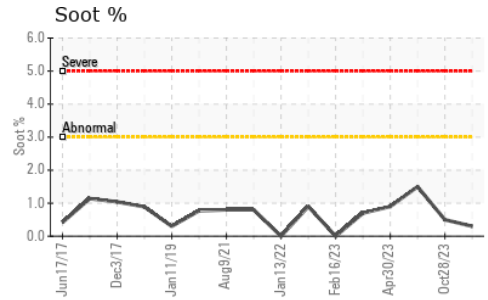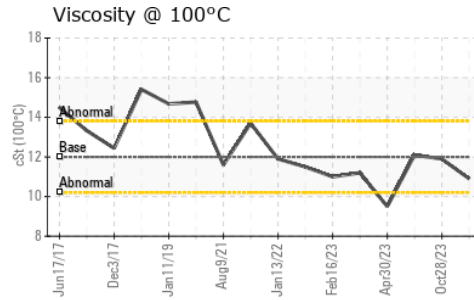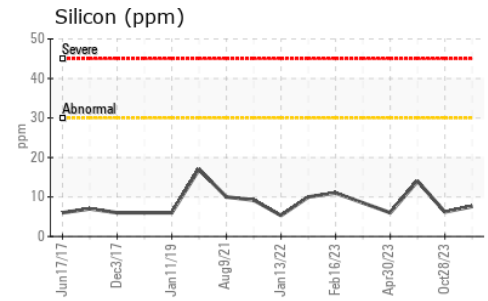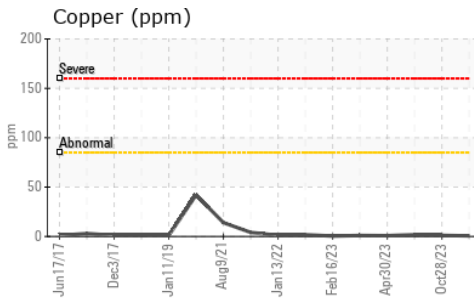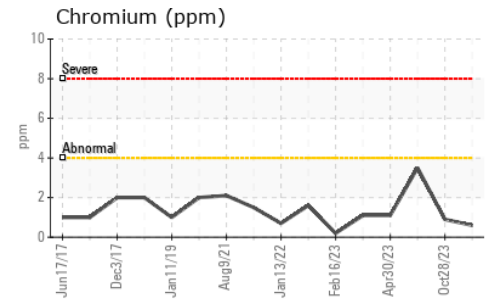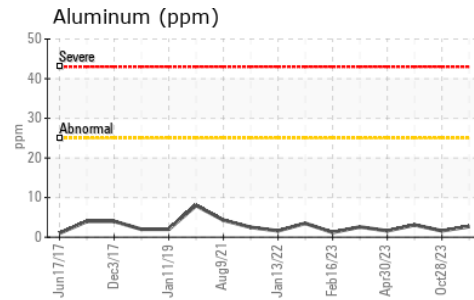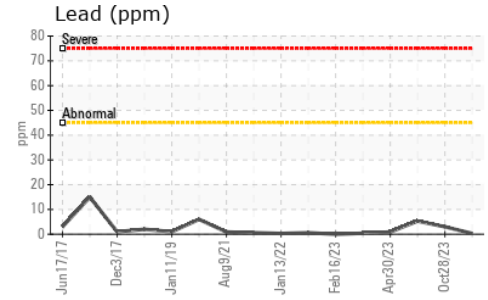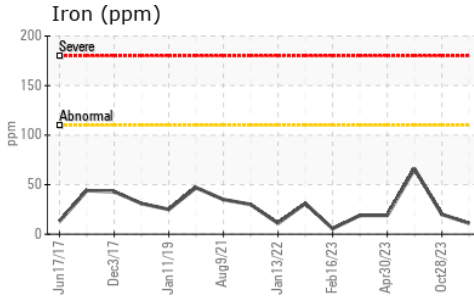

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0102654 **Received** : 26 Jan 2024
Lab Number : 02611362 **Diagnosed** : 26 Jan 2024
Unique Number : 5720457 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F: