




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
401035
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

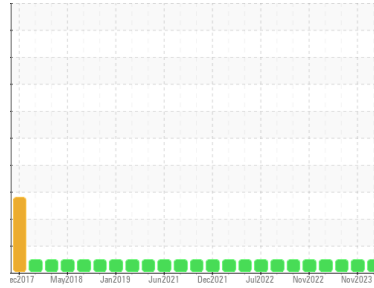

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0102652	GFL0097623	GFL0097600
Sample Date	Client Info	24 Jan 2024	13 Nov 2023	31 Oct 2023
Machine Age	hrs	17207	16681	16581
Oil Age	hrs	0	0	550
Oil Changed	Client Info	N/A	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >120	8	2	6
Chromium	ppm ASTM D5185(m) >20	0	0	0
Nickel	ppm ASTM D5185(m) >5	2	0	<1
Titanium	ppm ASTM D5185(m) >2	0	0	0
Silver	ppm ASTM D5185(m) >2	0	<1	<1
Aluminum	ppm ASTM D5185(m) >20	2	<1	2
Lead	ppm ASTM D5185(m) >40	<1	<1	2
Copper	ppm ASTM D5185(m) >330	2	<1	<1
Tin	ppm ASTM D5185(m) >15	0	0	0
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 2	4	8	2
Barium	ppm ASTM D5185(m) 0	0	<1	0
Molybdenum	ppm ASTM D5185(m) 50	59	59	60
Manganese	ppm ASTM D5185(m) 0	0	0	0
Magnesium	ppm ASTM D5185(m) 950	959	946	974
Calcium	ppm ASTM D5185(m) 1050	1082	1050	1050
Phosphorus	ppm ASTM D5185(m) 995	1005	995	974
Zinc	ppm ASTM D5185(m) 1180	1189	1153	1211
Sulfur	ppm ASTM D5185(m) 2600	2604	2558	2435
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	3	2	3
Sodium	ppm ASTM D5185(m)	3	2	3
Potassium	ppm ASTM D5185(m) >20	3	0	1

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >4	0.3	0	0.3
Nitration	Abs/cm ASTM D7624* >20	8.4	5.6	7.8
Sulfation	Abs./1mm ASTM D7415* >30	20.2	18.9	20.4



OIL ANALYSIS REPORT








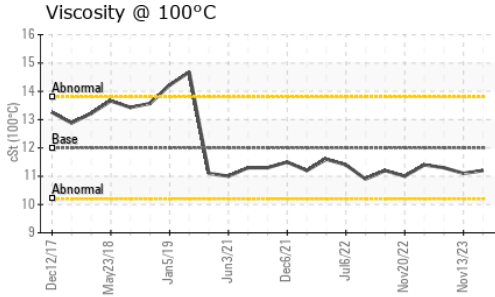


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	16.4	14.3	16.2

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.2	11.1	11.3

GRAPHS

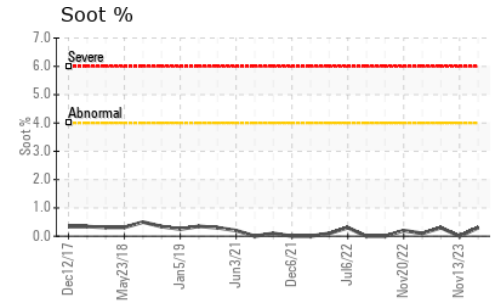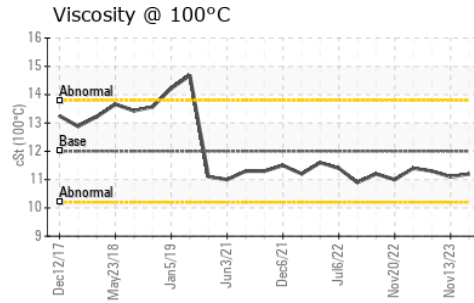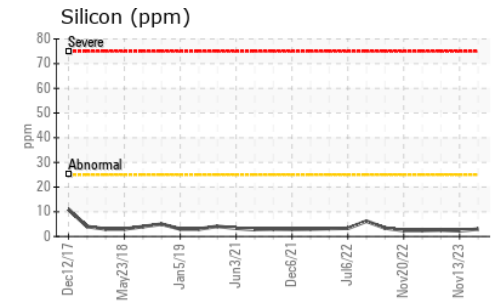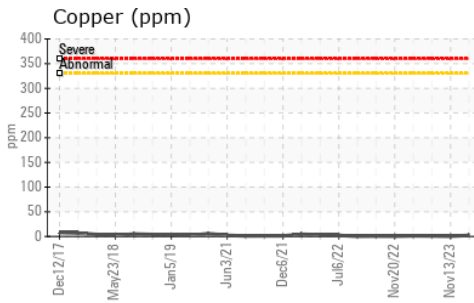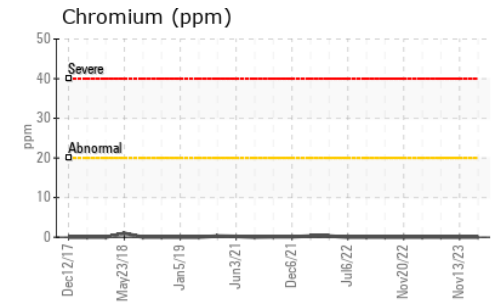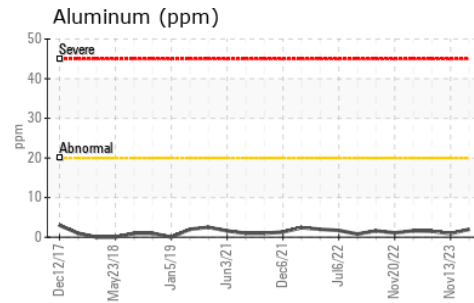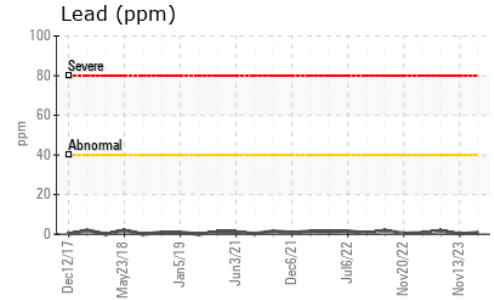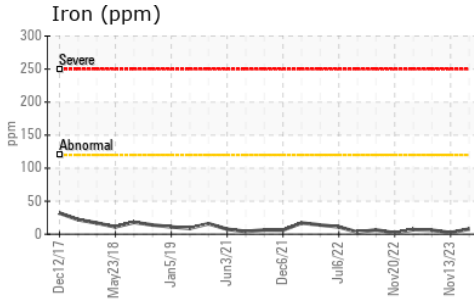

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 554 - Edmonton SW**
Sample No. : GFL0102652 **Received** : 26 Jan 2024 **8409 -15th Street NW**
Lab Number : **02611368** **Diagnosed** : 26 Jan 2024 **Edmonton, AB**
Unique Number : 5720463 **Diagnostician** : Wes Davis **CA T6P 0B8**
Test Package : MOB 1 **Contact:** Tim Greig **tgreg@gflenv.com**

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.