

# OIL ANALYSIS REPORT

Sample Rating Trend



**FUEL**



Machine Id

**ST996**

Component

**Diesel Engine**

Fluid

**PETRO CANADA SUPREME SYNTHETIC 5W40 (--- LTR)**

## DIAGNOSIS

### ▲ Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### ▲ Contamination

Light fuel dilution occurring.

### ▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0078384</b>	---	---
Sample Date	Client Info			<b>18 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>5864</b>	---	---
Oil Age	hrs	Client Info		<b>250</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		<b>NEG</b>	---	---
Glycol	WC Method			<b>NEG</b>	---	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>13</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>3</b>	---	---
Lead	ppm	ASTM D5185(m)	>40	<b>1</b>	---	---
Copper	ppm	ASTM D5185(m)	>330	<b>31</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	190	<b>25</b>	---	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	79	<b>▲ 21</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	564	<b>▲ 382</b>	---	---
Calcium	ppm	ASTM D5185(m)	993	<b>▲ 330</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	763	<b>650</b>	---	---
Zinc	ppm	ASTM D5185(m)	835	<b>▲ 462</b>	---	---
Sulfur	ppm	ASTM D5185(m)	2536	<b>▲ 1802</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>7</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Fuel	%	ASTM D7593*	>5	<b>▲ 4.9</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>4.5</b>	---	---
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>18.4</b>	---	---

# OIL ANALYSIS REPORT









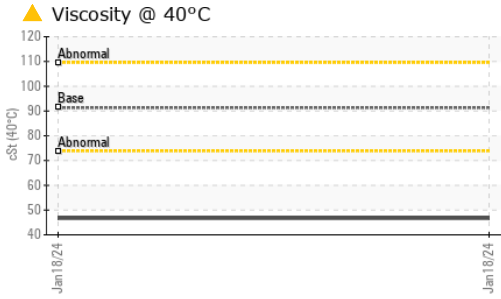


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>12.7</b>	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	91.3	<b>▲ 46.7</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	<b>▲ 8.4</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	170	<b>157</b>	---	---

## GRAPHS

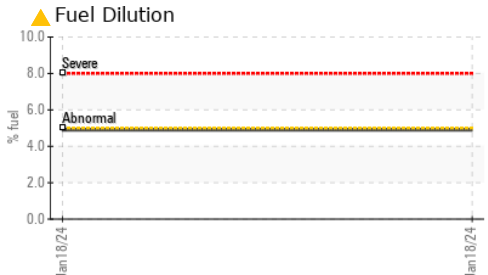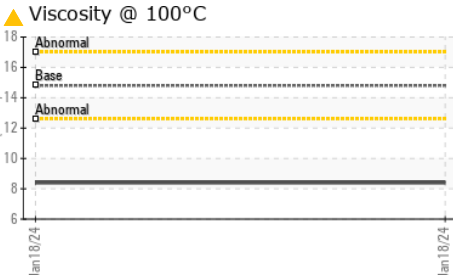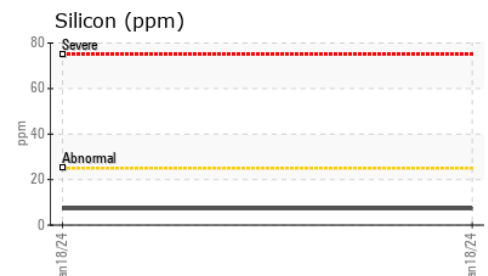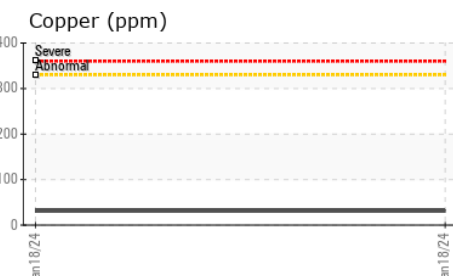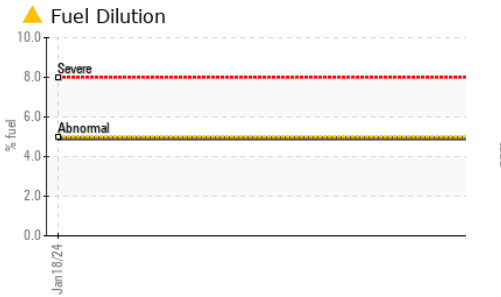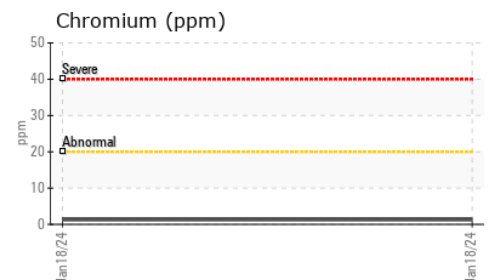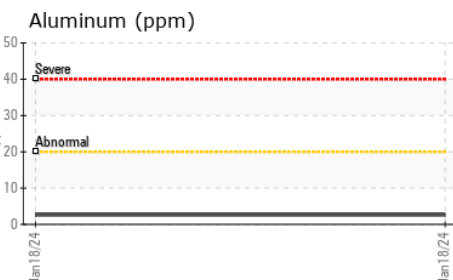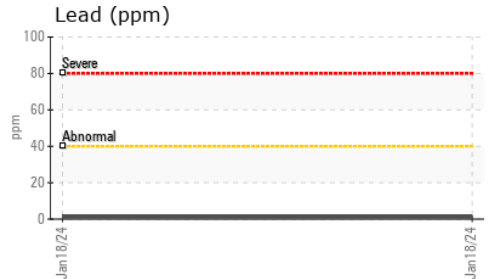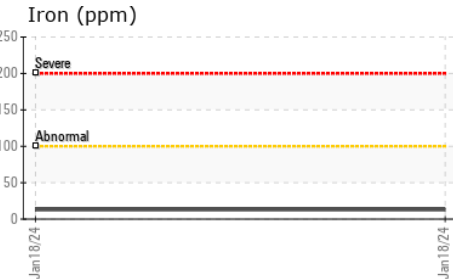

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Green Infrastructure and Partners Inc (GPI) - 286 - Shoring & Foundations  
**Sample No.** : PC0078384 **Received** : 26 Jan 2024  
**Lab Number** : 02611450 **Diagnosed** : 29 Jan 2024  
**Unique Number** : 5720545 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, KV40, PercentFuel, VI )

151 Ram Forest Rd,  
 Stouffville, ON  
 CA L4A 2G8  
 Contact: Shannon Abbott  
 sabbott@gipi.com  
 T: (905)750-5900  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.