




Machine Id  
**ST259**

Component  
**Diesel Engine**

Fluid  
**DISEL ENGINE OIL SAE 5W40 (--- GAL)**

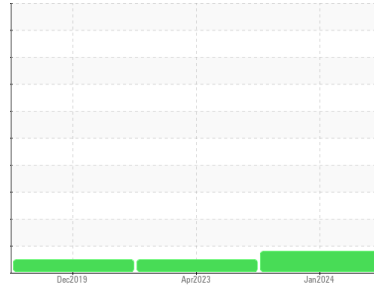

**DIAGNOSIS**

**Recommendation**  
The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

**Wear**  
All component wear rates are normal.

**Contamination**  
Light fuel dilution occurring. No other contaminants were detected in the oil.

**Fluid Condition**  
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0078381</b>	PC0075301	PC0021269
Sample Date	Client Info			<b>17 Jan 2024</b>	21 Apr 2023	02 Dec 2019
Machine Age	hrs	Client Info		<b>2985</b>	2476	1281
Oil Age	hrs	Client Info		<b>250</b>	0	922
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>MARGINAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>18</b>	17	10
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	2	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>41</b>	50	62
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	100	<b>59</b>	60	60
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>1084</b>	1122	1057
Calcium	ppm	ASTM D5185(m)	3000	<b>822</b>	897	894
Phosphorus	ppm	ASTM D5185(m)	1150	<b>973</b>	1083	982
Zinc	ppm	ASTM D5185(m)	1350	<b>1167</b>	1265	1172
Sulfur	ppm	ASTM D5185(m)	4250	<b>2808</b>	2836	2769
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>7</b>	8	6
Sodium	ppm	ASTM D5185(m)	>44	<b>4</b>	5	3
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Fuel	%	ASTM D7593*	>5	<b>▲ 3.3</b>	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.1</b>	0.1	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.1</b>	8.7	8.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.6</b>	19.8	22.1

# OIL ANALYSIS REPORT






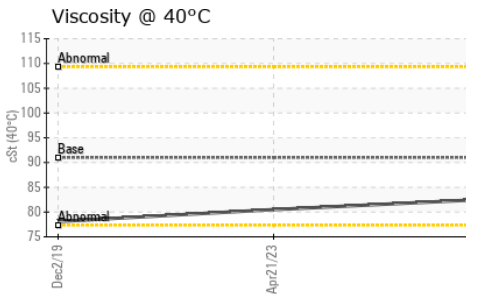
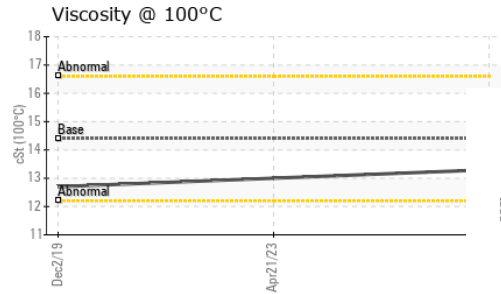
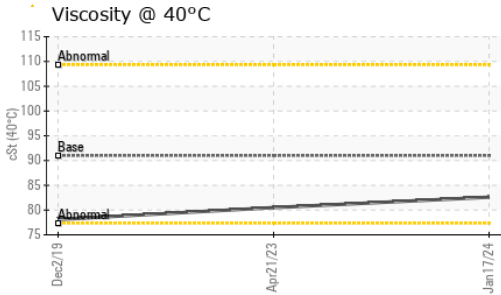


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>18.0</b>	19.1	17.1

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	91	<b>82.6</b>	80.5	78.1
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>13.3</b>	13.0	12.7
Viscosity Index (VI)	Scale	ASTM D2270*	164	<b>163</b>	162	162

## GRAPHS

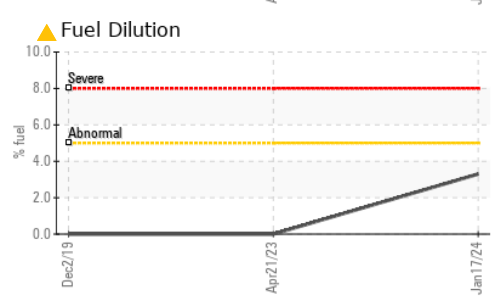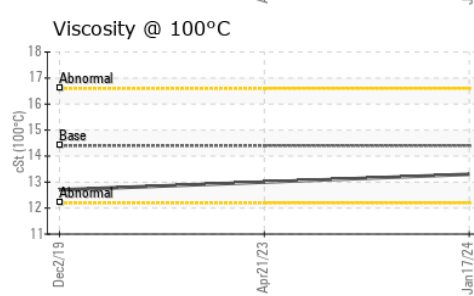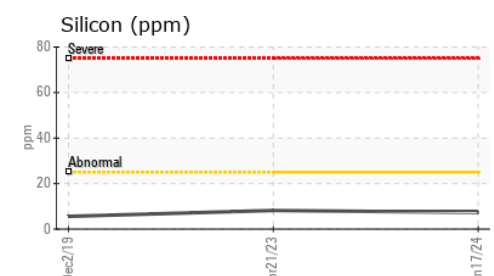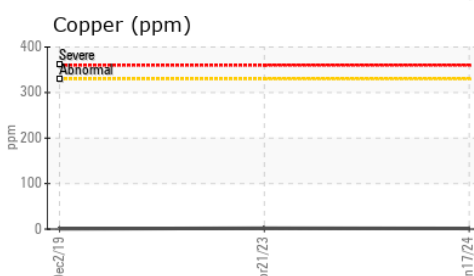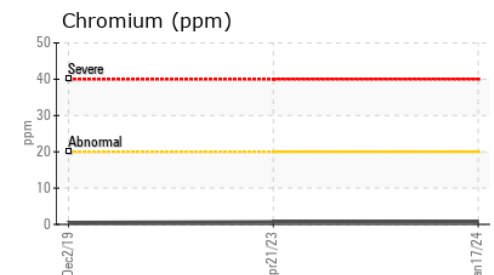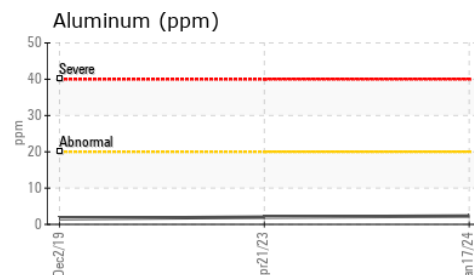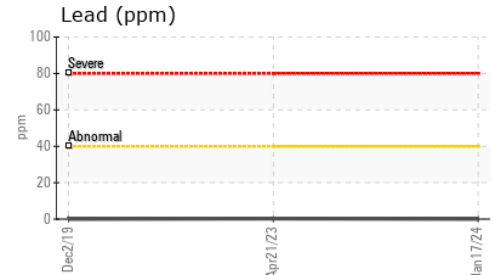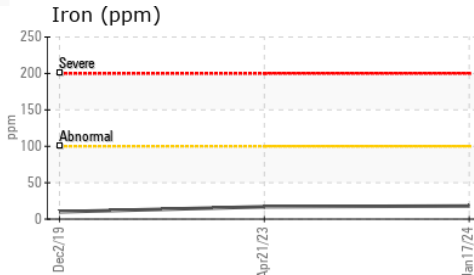

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Green Infrastructure and Partners Inc (GIPI) - 286 - Shoring & Foundations  
**Sample No.** : PC0078381 **Received** : 26 Jan 2024  
**Lab Number** : 02611453 **Diagnosed** : 29 Jan 2024  
**Unique Number** : 5720548 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, KV40, PercentFuel, VI )

151 Ram Forest Rd,  
 Stouffville, ON  
 CA L4A 2G8  
 Contact: Bill Acton  
 bacton@gipi.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
 F: