


Machine Id
IMM #28 (S/N 6259460)

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX AW 46 (1000 LTR)

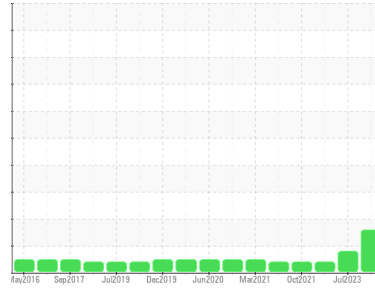

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. No other corrective action is recommended at this time.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. MPC (Membrane Patch Colorimetry) test indicates a light concentration of varnish present.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0080866	PC0076976	PC0062151
Sample Date	Client Info		15 Jan 2024	11 Jul 2023	21 Sep 2022
Machine Age	mths	Client Info	0	0	0
Oil Age	mths	Client Info	0	0	72
Oil Changed	Client Info		N/A	N/A	Not Changd
Sample Status			ABNORMAL	SEVERE	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >40	<1	<1	1
Chromium	ppm	ASTM D5185(m) >4	0	0	0
Nickel	ppm	ASTM D5185(m) >20	<1	<1	0
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m)	0	0	0
Aluminum	ppm	ASTM D5185(m) >4	<1	0	0
Lead	ppm	ASTM D5185(m) >10	0	0	0
Copper	ppm	ASTM D5185(m) >60	<1	1	<1
Tin	ppm	ASTM D5185(m) >4	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	0	0	<1
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 0	0	0	0
Manganese	ppm	ASTM D5185(m) 0	0	0	0
Magnesium	ppm	ASTM D5185(m) 0	0	<1	0
Calcium	ppm	ASTM D5185(m) 50	32	15	30
Phosphorus	ppm	ASTM D5185(m) 330	326	314	315
Zinc	ppm	ASTM D5185(m) 430	327	232	274
Sulfur	ppm	ASTM D5185(m) 760	707	573	662
Lithium	ppm	ASTM D5185(m)	<1	<1	<1






CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	0	<1	3
Sodium	ppm	ASTM D5185(m)	0	<1	<1
Potassium	ppm	ASTM D5185(m) >20	<1	<1	0

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 16970	1144	3119
Particles >6µm	ASTM D7647	>1300	▲ 3890	334	840
Particles >14µm	ASTM D7647	>160	115	17	59
Particles >21µm	ASTM D7647	>40	16	4	17
Particles >38µm	ASTM D7647	>10	1	0	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/19/14	17/16/11	19/17/13

OIL ANALYSIS REPORT

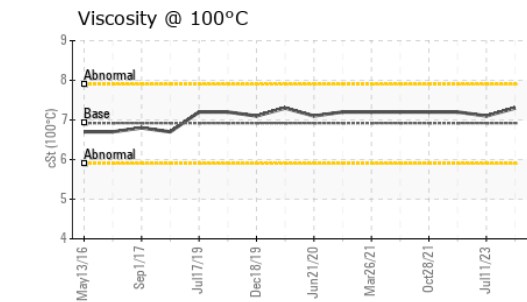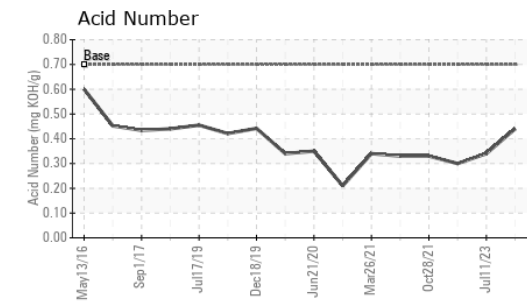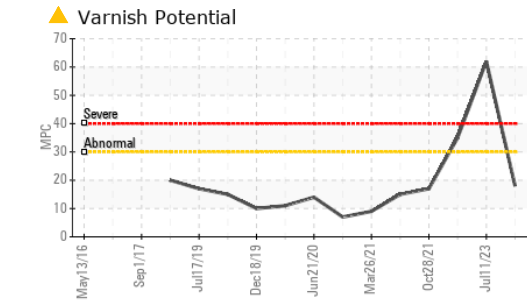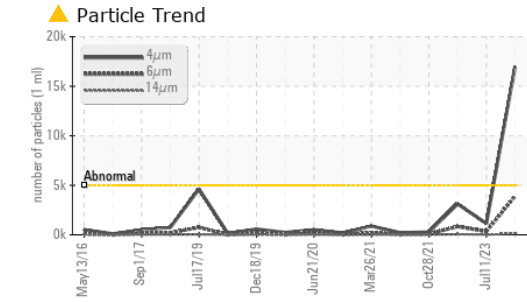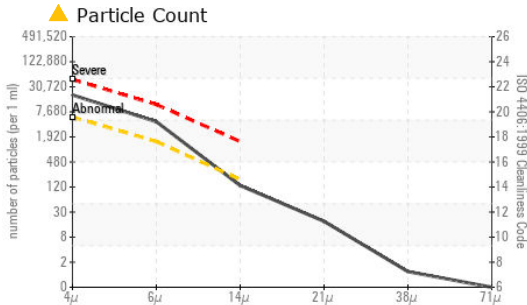

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0080866
Lab Number : **02611518**
Unique Number : 5720613
Test Package : IND 2 (Additional Tests: KV100, MPC, VI)


To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.70	0.44	0.34	0.30
MPC Varnish Potential	Scale	ASTM D7843(m)*	>15	18	62	35

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.4	44.8	45.3	45.6
Visc @ 100°C	cSt	ASTM D7279(m)	6.92	7.3	7.1	7.2
Viscosity Index (VI)	Scale	ASTM D2270*	104	125	115	118

SAMPLE IMAGES

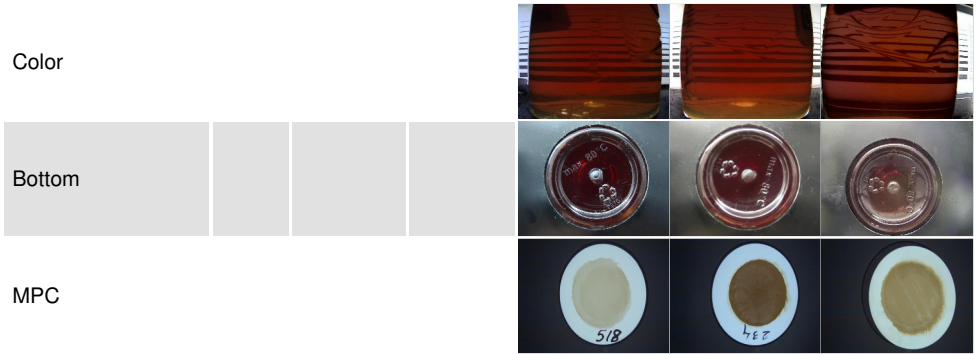

ROPAK PACKAGING CANADA
2240 WYECROFT RD
OAKVILLE, ON
CA L6L 6M1
Contact: Frank Maio
Frank.Maio@mauserpackaging.com
T: (905)465-9019
F:

MPC (Varnish Test)

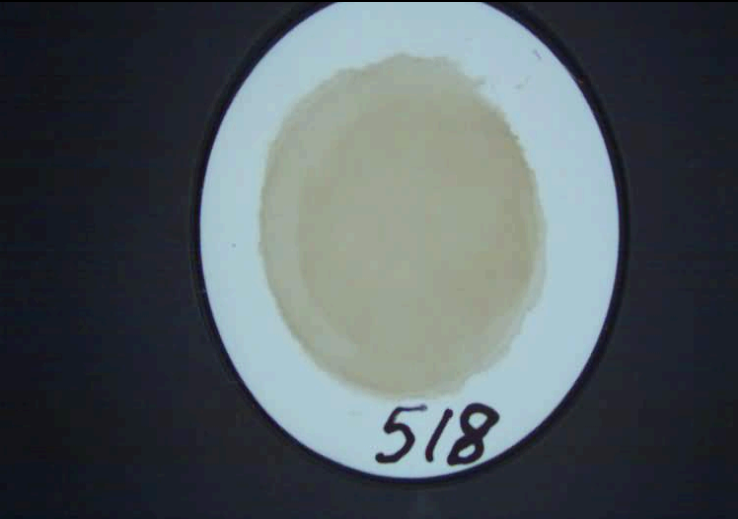

Sample Color & Clarity



This page left intentionally blank