


Machine Id
DR167
Component
Hydraulic System
Fluid
PETRO CANADA ENVIRON MV 46 (80 LTR)

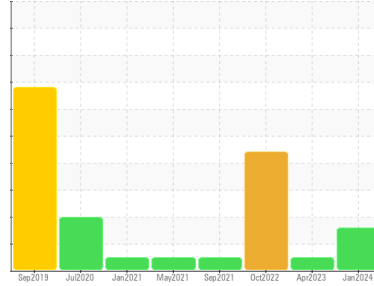

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0080573	PC0071494	PC0062505
Sample Date	Client Info			18 Jan 2024	04 Apr 2023	26 Oct 2022
Machine Age	hrs	Client Info		14622	13976	13233
Oil Age	hrs	Client Info		250	0	0
Oil Changed	Client Info			Changed	Not Changd	Not Changd
Sample Status				ABNORMAL	NORMAL	SEVERE

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG






WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1	<1	1
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>10	<1	<1	0
Lead	ppm	ASTM D5185(m)	>10	<1	0	<1
Copper	ppm	ASTM D5185(m)	>75	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<1	<1	<1
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	0	<1	0	0
Calcium	ppm	ASTM D5185(m)	0	<1	0	<1
Phosphorus	ppm	ASTM D5185(m)	650	611	645	580
Zinc	ppm	ASTM D5185(m)	0	7	10	16
Sulfur	ppm	ASTM D5185(m)	1420	1514	1402	1308
Lithium	ppm	ASTM D5185(m)		9	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	0	0	<1
Sodium	ppm	ASTM D5185(m)		0	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	1	0	<1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 24838	---	---	● 42860
Particles >6µm	ASTM D7647	>1300	▲ 4626	---	---	● 13099
Particles >14µm	ASTM D7647	>160	▲ 180	---	---	▲ 713
Particles >21µm	ASTM D7647	>40	30	---	---	▲ 173
Particles >38µm	ASTM D7647	>10	2	---	---	5
Particles >71µm	ASTM D7647	>3	1	---	---	1
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/19/15	---	---	● 23/21/17

OIL ANALYSIS REPORT

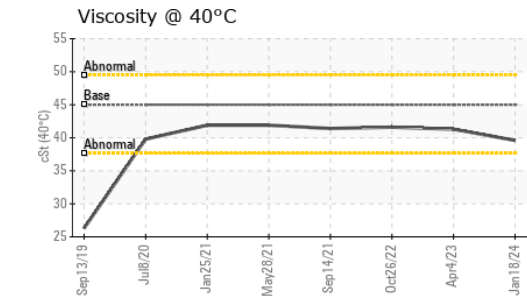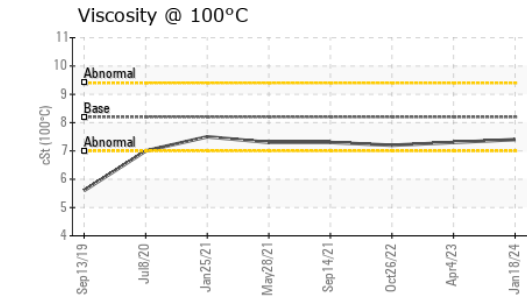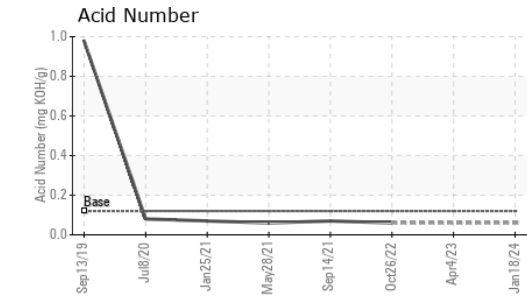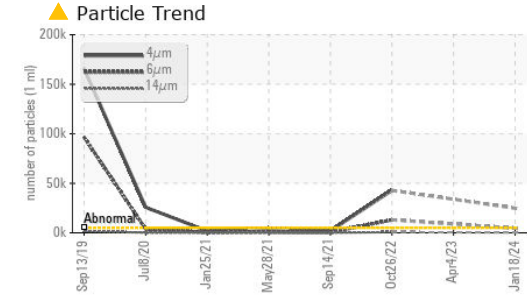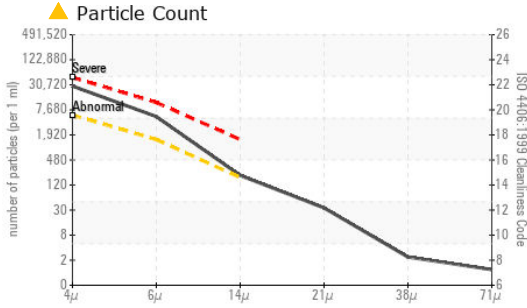

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.12	0.06	---	0.06

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	VLITE	VLITE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	45.0	39.6	41.3	41.6
Visc @ 100°C	cSt	ASTM D7279(m)	8.2	7.4	7.3	7.2
Viscosity Index (VI)	Scale	ASTM D2270*	158	155	141	136

SAMPLE IMAGES



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Green Infrastructure and Partners Inc (GPI) - 286 - Shoring & Foundations
Sample No. : PC0080573 **Received** : 26 Jan 2024 151 Ram Forest Rd, Stouffville, ON CA L4A 2G8
Lab Number : **02611599** **Diagnosed** : 30 Jan 2024 Contact: Shannon Abbott sabbott@gipi.com
Unique Number : 5720694 **Diagnostician** : Wes Davis T: (905)750-5900
Test Package : IND 2 (Additional Tests: KV100, TAN Man, VI)
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied. F: