


Machine Id
DR176
Component
Hydraulic System
Fluid
ATF (60 LTR)

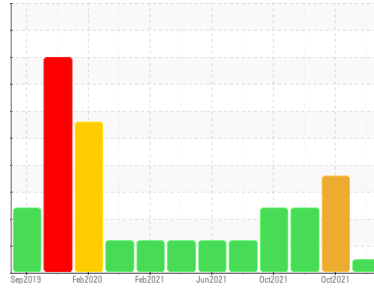

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0080571	PC0052150	PC0052151
Sample Date	Client Info			14 Jan 2024	20 Oct 2021	20 Oct 2021
Machine Age	hrs	Client Info		1121	7165	7165
Oil Age	hrs	Client Info		250	0	0
Oil Changed	Client Info			Changed	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG






WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	4	2	2
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>10	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>10	<1	1	1
Copper	ppm	ASTM D5185(m)	>75	7	<1	<1
Tin	ppm	ASTM D5185(m)	>10	0	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		175	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		4	10	10
Calcium	ppm	ASTM D5185(m)		753	▲ 6	▲ 6
Phosphorus	ppm	ASTM D5185(m)		166	268	268
Zinc	ppm	ASTM D5185(m)		32	▲ 44	▲ 44
Sulfur	ppm	ASTM D5185(m)		1903	▲ 972	▲ 982
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	3	1	1
Sodium	ppm	ASTM D5185(m)		5	5	5
Potassium	ppm	ASTM D5185(m)	>20	1	<1	1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	1040	▲ 13260	895	
Particles >6µm	ASTM D7647	>1300	233	▲ 3506	220	
Particles >14µm	ASTM D7647	>160	9	▲ 188	24	
Particles >21µm	ASTM D7647	>40	4	39	6	
Particles >38µm	ASTM D7647	>10	2	2	0	
Particles >71µm	ASTM D7647	>3	2	0	0	
Oil Cleanliness	ISO 4406 (c)	>19/17/14	17/15/10	▲ 21/19/15	17/15/12	

OIL ANALYSIS REPORT

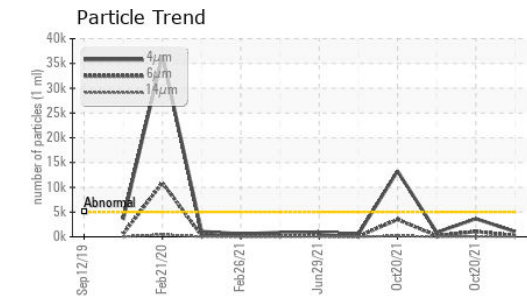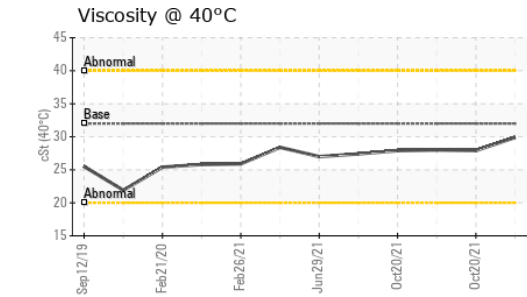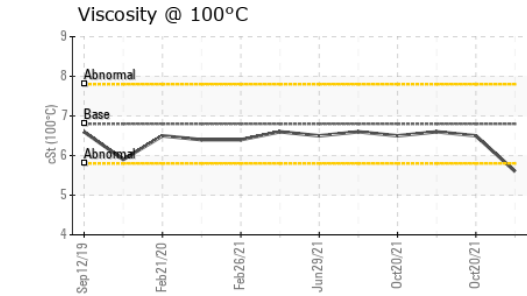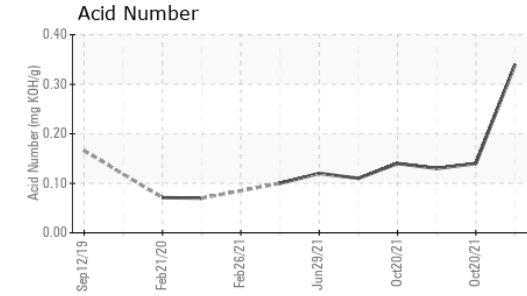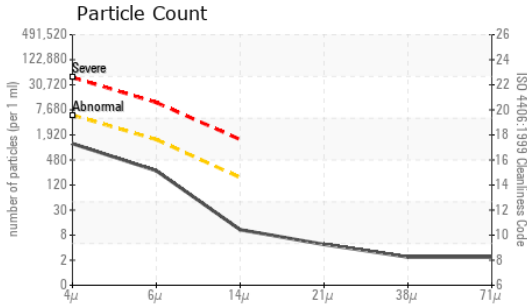


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.34	0.14	0.13

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32.0	29.9	▲ 27.9	▲ 28.0
Visc @ 100°C	cSt	ASTM D7279(m)	6.8	5.6	▲ 6.5	▲ 6.6
Viscosity Index (VI)	Scale	ASTM D2270*	178	128	▲ 199	▲ 204

SAMPLE IMAGES

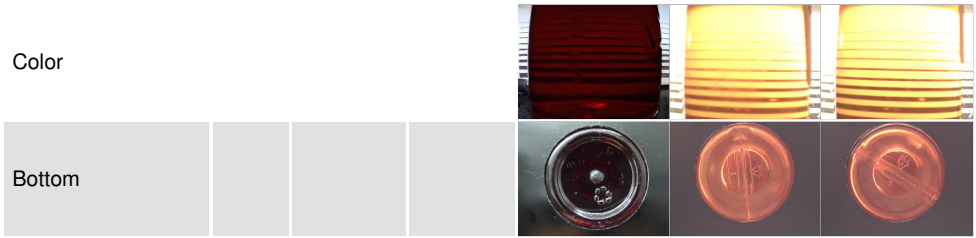

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Green Infrastructure and Partners Inc (GPI) - 266 - Shoring & Foundations
Sample No. : PC0080571 **Received** : 26 Jan 2024
Lab Number : **02611600** **Diagnosed** : 30 Jan 2024
Unique Number : 5720695 **Diagnostician** : Bill Quesnel
Test Package : IND 2 (Additional Tests: KV100, TAN Man, VI)
 151 Ram Forest Rd,
 Stouffville, ON
 CA L4A 2G8
 Contact: Shannon Abbott
 sabbott@gipi.com
 T: (905)750-5900
 F:

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*