




OIL ANALYSIS REPORT

Sample Rating Trend

ISO

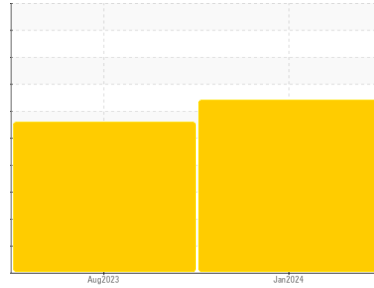

Machine Id
901087

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX MV 32 (--- GAL)

DIAGNOSIS

Recommendation

Nous vous recommandons de vérifier tous les endroits par lesquels des contaminants peuvent pénétrer dans le système. Nous vous recommandons de remplacer le filtre et d'utiliser un système de filtrage hors-ligne afin d'améliorer la propreté du fluide. Le reniflard d'air doit être réparé. S'il n'est pas classé, nous vous recommandons de le remplacer par un reniflard à air adapté au micron et / ou au dessicant. Si évalué, nous vous recommandons de réparer / remplacer le reniflard. Échantillonner de nouveau dans 30 à 45 jours afin de contrôler la situation.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il y a une quantité élevée de matières particulaires (2 à 100 µm de taille) présente dans l'huile.

Fluid Condition

L'huile peut encore servir si la contamination peut être réduite à un niveau acceptable.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0103757	GFL0088854	---
Sample Date	Client Info	22 Jan 2024	08 Aug 2023	---
Machine Age	hrs	11620	255653	---
Oil Age	hrs	0	0	---
Oil Changed	Client Info	Not Chngd	Not Chngd	---
Sample Status		SEVERE	SEVERE	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >50	40	32	---
Chromium	ppm ASTM D5185(m) >10	5	5	---
Nickel	ppm ASTM D5185(m) >4	<1	0	---
Titanium	ppm ASTM D5185(m)	0	<1	---
Silver	ppm ASTM D5185(m)	0	0	---
Aluminum	ppm ASTM D5185(m) >5	2	2	---
Lead	ppm ASTM D5185(m) >4	0	0	---
Copper	ppm ASTM D5185(m) >15	<1	<1	---
Tin	ppm ASTM D5185(m) >4	0	0	---
Antimony	ppm ASTM D5185(m)	0	0	---
Vanadium	ppm ASTM D5185(m)	0	0	---
Beryllium	ppm ASTM D5185(m)	0	0	---
Cadmium	ppm ASTM D5185(m)	0	<1	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	0	<1	---
Barium	ppm ASTM D5185(m) 0	0	0	---
Molybdenum	ppm ASTM D5185(m) 0	0	0	---
Manganese	ppm ASTM D5185(m) 1	0	<1	---
Magnesium	ppm ASTM D5185(m) 0	2	2	---
Calcium	ppm ASTM D5185(m) 50	52	53	---
Phosphorus	ppm ASTM D5185(m) 330	322	341	---
Zinc	ppm ASTM D5185(m) 430	396	402	---
Sulfur	ppm ASTM D5185(m) 760	770	741	---
Lithium	ppm ASTM D5185(m)	<1	<1	---

CONTAMINANTS




method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	5	4	---
Sodium	ppm ASTM D5185(m)	14	15	---
Potassium	ppm ASTM D5185(m) >20	2	<1	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	150260	123771	---
Particles >6µm	ASTM D7647 >1300	69785	36605	---
Particles >14µm	ASTM D7647 >160	1480	291	---
Particles >21µm	ASTM D7647 >40	160	63	---
Particles >38µm	ASTM D7647 >10	20	2	---
Particles >71µm	ASTM D7647 >3	1	1	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	24/23/18	24/22/15	---




OIL ANALYSIS REPORT

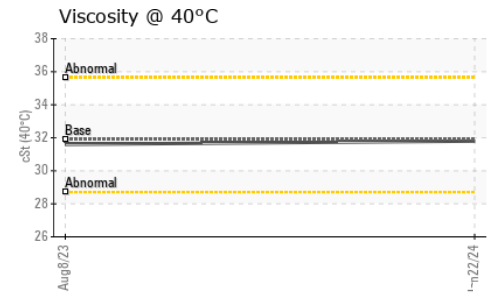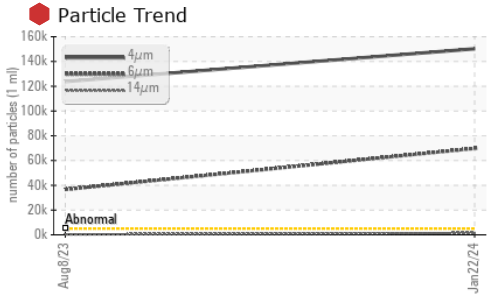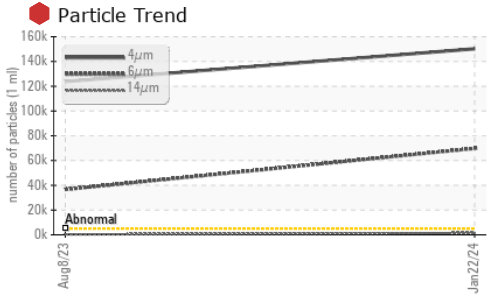





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	▲ VLITE	---
Yellow Metal	scalar	Visual*	NONE	VLITE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	31.9	31.8	31.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

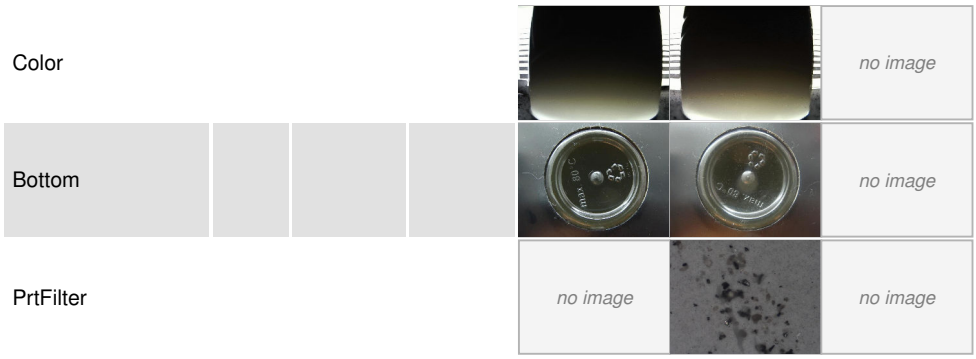

GRAPHS

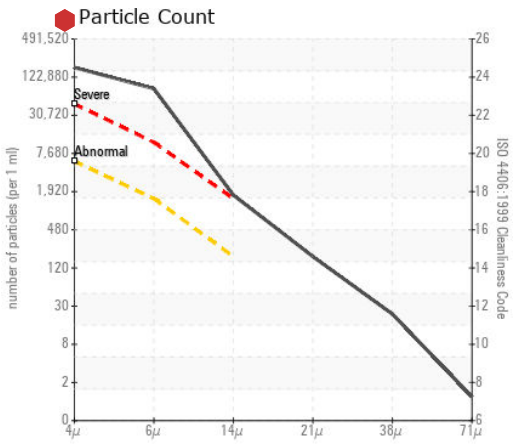

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 780 - GMA - ICI - Solid Waste**
Sample No. : GFL0103757 **Received** : 29 Jan 2024 4365 boul. St-Elzear Ouest,
Lab Number : **02611854** **Tested** : 31 Jan 2024 Laval, QC
Unique Number : 5720949 **Diagnosed** : 31 Jan 2024 - Wes Davis CA H7P 4J3
Test Package : MOB 1 (Additional Tests: PrtCount) Contact: Pieces Laval
 pieces.laval@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (450)687-3838
 F: