




# OIL ANALYSIS REPORT

Sample Rating Trend

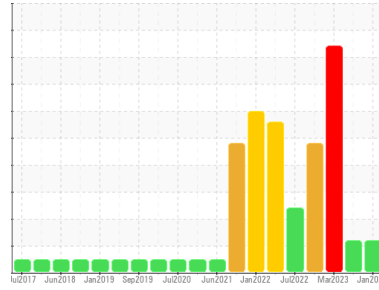

FUEL



Machine Id  
**8426**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (20 LTR)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0097441</b>	GFL0085668	GFL0059840
Sample Date	Client Info	<b>25 Jan 2024</b>	06 Nov 2023	02 Mar 2023
Machine Age	hrs	<b>540</b>	540	0
Oil Age	hrs	<b>540</b>	540	0
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>ABNORMAL</b>	ABNORMAL	SEVERE

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	0.0	0.538

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	<b>29</b>	30	28
Chromium	ppm ASTM D5185(m) >20	<b>1</b>	1	2
Nickel	ppm ASTM D5185(m) >4	<b>&lt;1</b>	<1	<1
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	<1
Silver	ppm ASTM D5185(m) >3	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185(m) >20	<b>2</b>	2	3
Lead	ppm ASTM D5185(m) >40	<b>&lt;1</b>	3	<1
Copper	ppm ASTM D5185(m) >330	<b>32</b>	133	3
Tin	ppm ASTM D5185(m) >15	<b>0</b>	0	<1
Antimony	ppm ASTM D5185(m)	<b>0</b>	0	<1
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	<b>4</b>	20	7
Barium	ppm ASTM D5185(m) 0	<b>2</b>	10	0
Molybdenum	ppm ASTM D5185(m) 60	<b>50</b>	44	50
Manganese	ppm ASTM D5185(m) 0	<b>&lt;1</b>	3	<1
Magnesium	ppm ASTM D5185(m) 1010	<b>791</b>	714	791
Calcium	ppm ASTM D5185(m) 1070	<b>946</b>	1128	957
Phosphorus	ppm ASTM D5185(m) 1150	<b>762</b>	585	877
Zinc	ppm ASTM D5185(m) 1270	<b>973</b>	776	1012
Sulfur	ppm ASTM D5185(m) 2060	<b>1986</b>	1626	2275
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS



method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	<b>7</b>	17	14
Sodium	ppm ASTM D5185(m)	<b>5</b>	13	1780
Potassium	ppm ASTM D5185(m) >20	<b>3</b>	5	92
Fuel	% ASTM D7593* >5	<b>6.9</b>	6.3	<1.0

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	<b>0.4</b>	0.3	0.3
Nitration	Abs/cm ASTM D7624* >20	<b>12.2</b>	11.4	19.3
Sulfation	Abs/1mm ASTM D7415* >30	<b>22.7</b>	21.7	24.6



# OIL ANALYSIS REPORT







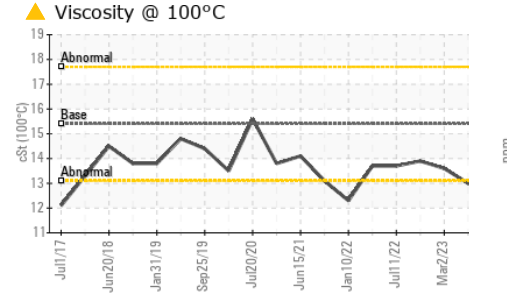
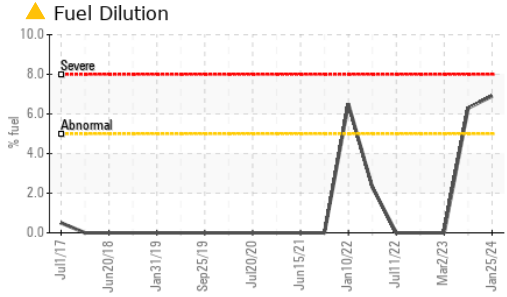


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	22.7	22.1	21.6

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	▲ .2%
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 12.7	▲ 13.0	13.6

## GRAPHS

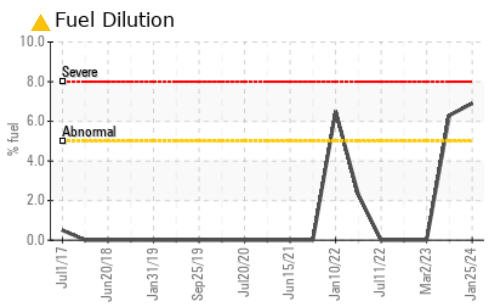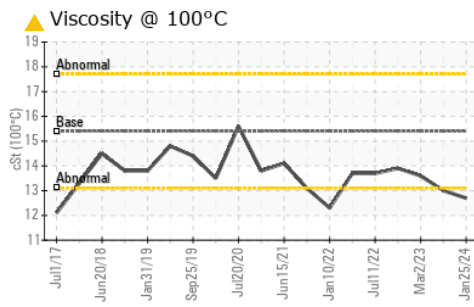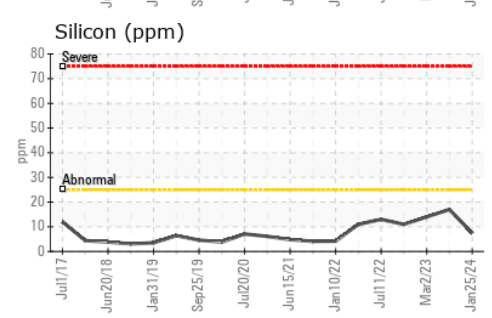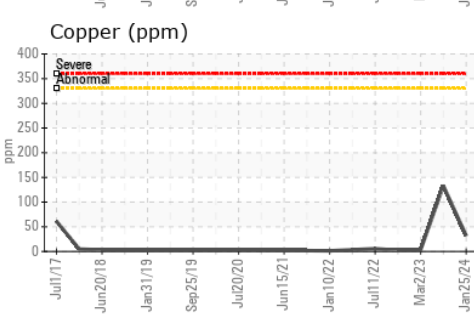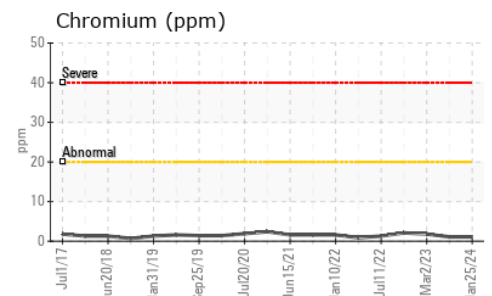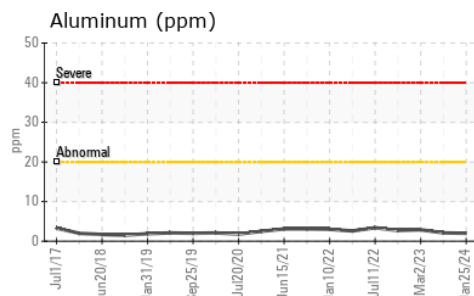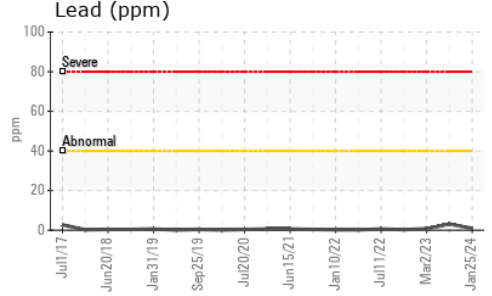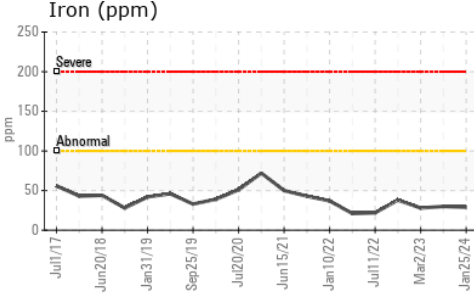

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 221 - Windsor**  
**Sample No.** : GFL0097441 **Received** : 30 Jan 2024 **905 Tecumseh Road W**  
**Lab Number** : 02612035 **Diagnosed** : 31 Jan 2024 **Windsor, ON**  
**Unique Number** : 5721130 **Diagnostician** : Wes Davis **CA N8W 4J5**  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel ) **Contact: Rhys Marotte**  
rmarotte@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.