




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

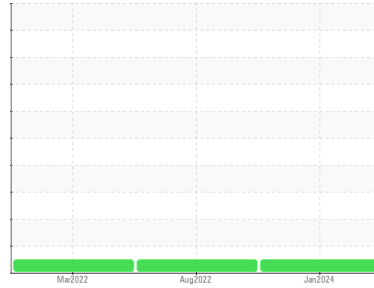

Machine Id
801106
 Component
Transmission (Auto)
 Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0099554	GFL0057786	GFL0044505
Sample Date	Client Info		17 Jan 2024	26 Aug 2022	07 Mar 2022
Machine Age	hrs	Client Info	11640	9364	8248
Oil Age	hrs	Client Info	400	537	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>160	28	135	140
Chromium	ppm	ASTM D5185(m)	>5	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	0
Aluminum	ppm	ASTM D5185(m)	>50	8	19	17
Lead	ppm	ASTM D5185(m)	>50	2	20	19
Copper	ppm	ASTM D5185(m)	>225	10	18	17
Tin	ppm	ASTM D5185(m)	>10	<1	2	2
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	78	49	129	157
Barium	ppm	ASTM D5185(m)		<1	0	0
Molybdenum	ppm	ASTM D5185(m)	0	<1	<1	<1
Manganese	ppm	ASTM D5185(m)		<1	2	2
Magnesium	ppm	ASTM D5185(m)	0	11	3	3
Calcium	ppm	ASTM D5185(m)	113	142	128	132
Phosphorus	ppm	ASTM D5185(m)	222	218	333	399
Zinc	ppm	ASTM D5185(m)		23	11	11
Sulfur	ppm	ASTM D5185(m)	1326	1520	1970	2185
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	11	6	6
Sodium	ppm	ASTM D5185(m)		9	13	12
Potassium	ppm	ASTM D5185(m)	>20	2	2	2

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	1.4	1.07	1.96	2.12




OIL ANALYSIS REPORT

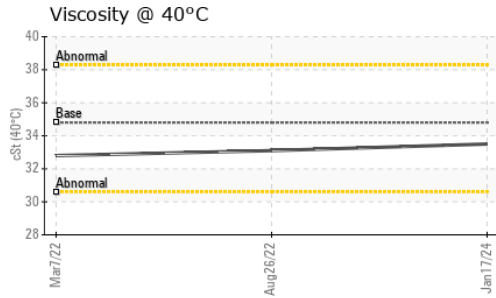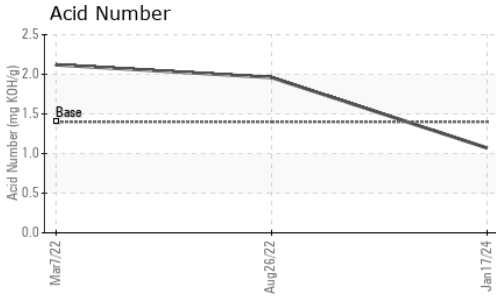









VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	VLITE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	34.8	33.5	33.1	32.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

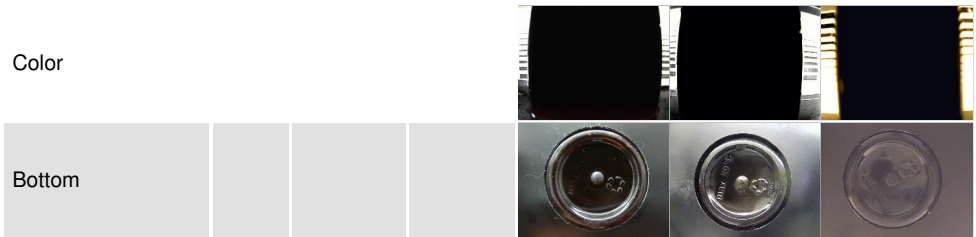

GRAPHS

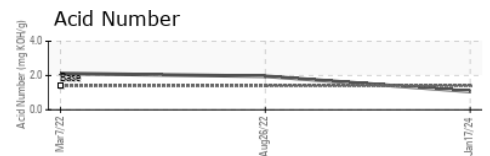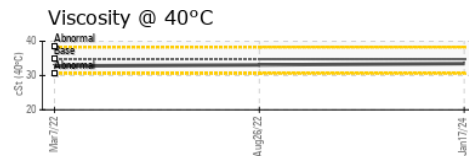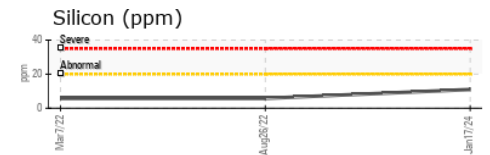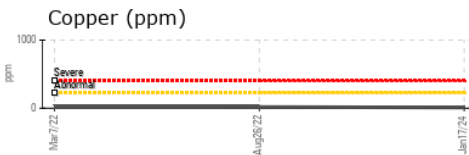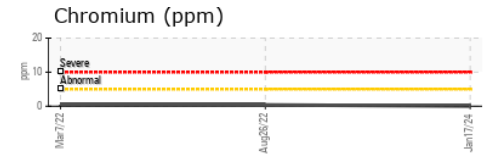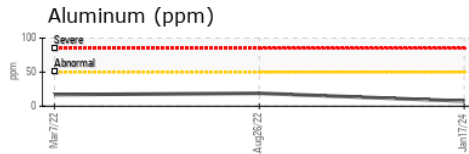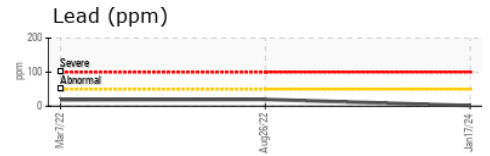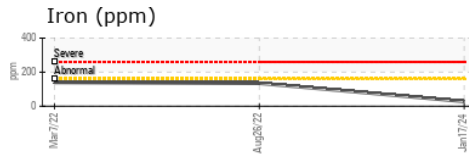

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 550 - Rocky View County
Sample No. : GFL0099554 **Received** : 31 Jan 2024
Lab Number : **02612553** **Diagnosed** : 01 Feb 2024
Unique Number : 5721648 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

220 Carmek Blvd
 Rocky View County, AB
 CA T1X 1X1
 Contact: GFL Calgary
 calgarymaintenance@gflenv.com
 T:
 F: (403)369-6163